

Voyager™ 1250g

Single-Line Laser Scanner



User Guide

Disclaimer

Honeywell International Inc. ("HII") reserves the right to make changes in specifications and other information contained in this document without prior notice, and the reader should in all cases consult HII to determine whether any such changes have been made. The information in this publication does not represent a commitment on the part of HII.

HII shall not be liable for technical or editorial errors or omissions contained herein; nor for incidental or consequential damages resulting from the furnishing, performance, or use of this material. HII disclaims all responsibility for the selection and use of software and/or hardware to achieve intended results.

This document contains proprietary information that is protected by copyright. All rights are reserved. No part of this document may be photocopied, reproduced, or translated into another language without the prior written consent of HII.

Copyright © 2011-2017 Honeywell International Inc. All rights reserved.

Web Address: www.honeywellaidc.com

Other product names or marks mentioned in this document may be trademarks or registered trademarks of other companies and are the property of their respective owners.

For patent information, refer to www.hsmpats.com.

TABLE OF CONTENTS

Customer Support	xiii
Technical Assistance	xiii
Product Service and Repair	xiii
Limited Warranty	xiii
Send Feedback	xiii

Chapter 1 - Get Started 1

About This Manual.....	1
Unpack Your Device.....	1
Connect the Device.....	1
Connect with USB.....	1
Connect with Keyboard Wedge	2
Connect with RS232 Serial Port	3
Connect with RS485.....	4
Reading Techniques.....	4
Menu Bar Code Security Settings.....	5
Set Custom Defaults	5
Reset the Custom Defaults.....	6

Chapter 2 - Program the Interface 7

Introduction.....	7
Program the Interface - Plug and Play	7
Keyboard Wedge	7
IBM PS2 Keyboard.....	8
RS232 Serial Port.....	8

RS485	8
OPOS Mode	9
USB IBM SurePos.....	10
IBM Secondary Interface	10
USB PC or Macintosh Keyboard.....	11
USB HID	11
HID Fallback Mode	11
USB Serial Commands	12
USB Serial Emulation	12
CTS/RTS Emulation	12
ACK/NAK Mode.....	13
Communication Timeout	13
Timeout Retries	13
Communication Timeout Beeper	13
NAK Retries	14
Support BEL/CAN in ACK/NAK.....	14
Verifone® Ruby Terminal Default Settings	14
Gilbarco® Terminal Default Settings.....	15
Honeywell Bioptic Aux Port Configuration.....	15
Datalogic™ Magellan® Bioptic Aux Port Configuration	16
NCR Bioptic Aux Port Configuration	16
Wincor Nixdorf Terminal Default Settings.....	17
Wincor Nixdorf Beetle™ Terminal Default Settings.....	17
Wincor Nixdorf RS232 Mode A.....	18
Keyboard Country Layout.....	18
Keyboard Countries	18
Keyboard Wedge Modifiers	26
ALT Mode	26
Keyboard Style.....	26
Keyboard Conversion.....	27
Keyboard Modifiers	28
Inter-Scan Code Delay	29

<FO> Break Character.....	29
Keyboard Wedge Defaults.....	29
RS232 Modifiers.....	30
RS232 Baud Rate.....	30
RS232 Word Length: Data Bits, Stop Bits, and Parity.....	31
RS232 Handshaking	32
RS232 Timeout.....	33
XON/XOFF	34
ACK/NAK.....	34
Communication Timeout.....	34
Timeout Retries.....	35
Communication Timeout Beeper.....	35
NAK Retries	35
Support BEL/CAN in ACK/NAK.....	35
RS232 Defaults	36
NCR Modifiers	36
NCR ACK/NAK	36
Block Check Character	36
NCR Prefix	37
NCR Suffix	37
NCR Prefix/Suffix	37
NCR NOF (Not-on-File) Error	38
Scanner to Bioptic Communication	38
Scanner-Bioptic Packet Mode.....	38
ACK/NAK.....	38
Communication Timeout.....	39

Chapter 3 - Input/Output Settings41

Power Up Beeper	41
Beep on BEL Character	41
Good Read and Error Indicators.....	42
Beeper – Good Read	42
Beeper Volume – Good Read	42

Beeper Pitch – Good Read	42
Beeper – Transmit Order	43
Beeper Pitch – Error	43
Beeper Duration – Good Read.....	43
Number of Beeps – Good Read.....	44
Number of Beeps – Error.....	44
LED Indicators	44
LED Settings	45
LED Brightness	46
In-Stand and Out-Of-Stand Settings	46
In-Stand and Out-of-Stand Defaults	47
Presentation Modes	47
Manual Activation Mode	48
End Manual Activation After Good Read	48
Manual Activation Laser Timeout - Trigger Settings	49
CodeGate®	50
Object Detection Mode	50
End Object Detection After Good Read	51
Object Detection Laser Timeout	51
Object Detection Distance.....	52
Character Activation Mode	52
Activation Character	53
End Character Activation After Good Read.....	53
Character Activation Laser Timeout.....	53
Character Deactivation Mode.....	54
Deactivation Character	54
Reread Delay.....	54
User-Specified Reread Delay	55
Output Sequence Overview	55
Output Sequence Editor.....	55
To Add an Output Sequence	55
Other Programming Selections.....	56
Output Sequence Example.....	56
Output Sequence Editor.....	58

Sequence Timeout	58
Sequence Match Beeper.....	58
Partial Sequence.....	58
Require Output Sequence.....	59
No Read.....	59

Chapter 4 - Data Edit61

Prefix/Suffix Overview	61
Add a Prefix or Suffix:	62
Example: Add a Tab Suffix to All Symbolologies	62
Clear One or All Prefixes or Suffixes.....	62
To Add a Carriage Return Suffix to All Symbolologies	63
Prefix Selections	63
Suffix Selections	63
Transmit Alternate Extended ASCII Characters	64
Function Code Transmit.....	65
Communication Check Character.....	66
Intercharacter, Interfunction, and Intermessage Delays	66
Intercharacter Delay.....	67
User Specified Intercharacter Delay.....	67
Interfunction Delay.....	68
Intermessage Delay.....	68

Chapter 5 - Data Format69

Data Format Editor Introduction	69
To Add a Data Format.....	70
Other Programming Selections.....	71
Terminal ID Table	72
Data Format Editor Commands	72
Send Commands	72

Send all characters	72
Send a number of characters.....	72
Send all characters up to a particular character.....	73
Send all but the last characters	74
Insert a character multiple times	74
Insert symbology name.....	74
Insert bar code length.....	75
Move Commands	75
Move the cursor forward a number of characters	75
Move the cursor backward a number of characters	76
Move the cursor to the beginning.....	76
Move the cursor to the end	76
Search Commands	77
Search forward for a character.....	77
Search backward for a character.....	77
Search forward for a string	77
Search backward for a string	78
Search forward for a non-matching character	78
Search backward for a non-matching character	79
Miscellaneous Commands.....	79
Suppress characters.....	79
Stop suppressing characters	80
Replace characters	80
Stop replacing characters	81
Compare characters	81
Compare string	81
Check for a number.....	81
Check for non-numeric character.....	82
Insert a delay	82
Data Formatter.....	82
Data Format Non-Match Error Tone	83
Primary/Alternate Data Formats	84
Single Scan Data Format Change	84

Chapter 6 - Symbolologies.....87

All Symbolologies Off	88
Message Length Description	88
Codabar.....	88
Codabar Start/Stop Characters	89
Codabar Check Character	89
Codabar Concatenation.....	90
Concatenation Timeout.....	91
Codabar Redundancy	91
Codabar Message Length.....	91
Code 39	92
Code 39 Start/Stop Characters	92
Code 39 Check Character	92
Code 39 Redundancy.....	93
Code 39 Message Length	93
Code 32 Pharmaceutical (PARAF)	94
Full ASCII.....	94
Interleaved 2 of 5.....	95
NULL Characters	95
Check Digit.....	95
Interleaved 2 of 5 Redundancy	96
Interleaved 2 of 5 Message Length.....	96
NEC 2 of 5	97
Check Digit.....	97
NEC 2 of 5 Redundancy.....	98
NEC 2 of 5 Message Length	98
Code 93	98
Code 93 Redundancy.....	99
Code 93 Message Length	99
Straight 2 of 5 Industrial (three-bar start/stop)	99
Straight 2 of 5 Industrial Redundancy.....	100
Straight 2 of 5 Industrial Message Length	100
Straight 2 of 5 IATA (two-bar start/stop)	100

Straight 2 of 5 IATA Redundancy	101
Straight 2 of 5 IATA Message Length	101
Matrix 2 of 5	102
Matrix 2 of 5 Check Character	102
Matrix 2 of 5 Redundancy	102
Matrix 2 of 5 Message Length	103
Code 11	103
Check Digits Required	104
Check Digit Validation	104
Code 11 Redundancy	104
Code 11 Message Length	105
Code 128	105
128 Group Separator Output	106
Code 128 Redundancy	106
Code 128 Message Length	106
ISBT 128	107
Concatenation Timeout	107
ISBT 128 Predefined Concatenation Sequences	107
ISBT 128 Predefined Concatenation Sequences On/Off	108
ISBT 128 User-Defined Concatenation Sequences	109
ISBT 128 User-Defined Concatenation Sequences On/Off	110
Content Verification	111
Transmit Identifiers	111
Flag Digit Conversion	111
GS1-128	112
GS1-128 Application Identifier Parsing	112
GS1-128 Redundancy	112
GS1-128 Message Length	113
Telepen	113
Telepen Output	114
Telepen Redundancy	114
Telepen Message Length	114
UPC-A	115
UPC-A Number System and Check Digit	115

UPC-A Number System	115
UPC-A Check Digit.....	116
UPC-A Addenda.....	116
UPC-A Addenda Required	116
Addenda Timeout.....	117
UPC-A Addenda Separator.....	117
UPC-A Redundancy	117
UPC-A/EAN-13 with Extended Coupon Code	118
UPC-A Number System 4 Addenda Required	118
UPC-A Number System 5 Addenda Required	119
Addenda Timeout.....	120
UPC-E0	120
UPC-E0 Expand	121
UPC-E0 Number System.....	121
UPC-E0 Number System and Check Digit	121
UPC-E0 Check Digit.....	121
UPC-E0 Addenda Required	123
Addenda Timeout.....	123
UPC-E0 Redundancy	123
EAN/JAN-13.....	124
Convert UPC-A to EAN-13	124
EAN/JAN-13 Addenda Required.....	125
EAN-13 Beginning with 2 Addenda Required	126
EAN-13 Beginning with 290 Addenda Required	126
EAN-13 Beginning with 378/379 Addenda Required.....	127
EAN-13 Beginning with 414/419 Addenda Required.....	127
EAN-13 Beginning with 434/439 Addenda Required.....	128
EAN-13 Beginning with 977 Addenda Required	129
EAN-13 Beginning with 978 Addenda Required	129
EAN-13 Beginning with 979 Addenda Required	130
Addenda Timeout.....	130
EAN/JAN-13 Redundancy	131

ISBN Translate.....	132
Convert ISBN to 13-Digit.....	132
ISBN Reformat	132
ISSN Translate.....	133
ISSN Reformat	133
EAN/JAN-8.....	133
EAN/JAN-8 Addenda	134
Addenda Timeout.....	135
EAN/JAN-8 Redundancy.....	135
MSI.....	136
MSI Redundancy	137
MSI Message Length.....	138
Plessey Code.....	138
Plessey Check Character.....	138
Plessey Redundancy	139
Plessey Message Length.....	139
GS1 DataBar Omnidirectional.....	140
GS1 DataBar Omnidirectional Redundancy	140
GS1 DataBar Limited	141
GS1 DataBar Limited Redundancy.....	141
GS1 DataBar Expanded	142
GS1 DataBar Expanded Redundancy	142
GS1 DataBar Expanded Message Length.....	142
Trioptic Code.....	143
GS1 Emulation.....	143
Postal Codes	144
China Post (Hong Kong 2 of 5)	144
China Post (Hong Kong 2 of 5) On/Off.....	144
China Post (Hong Kong 2 of 5) Redundancy	144
China Post (Hong Kong 2 of 5) Message Length.....	145

Chapter 7 - Utilities.....147

Add a Test Code I.D. Prefix to All Symbolologies	147
--	-----

Show Software Revision	147
Show Data Format	147
Test Menu.....	148
EZConfig Cloud for Scanning Introduction.....	148
EZConfig Cloud for Scanning Operations	148
Scan Data	148
Configure.....	148
Install EZConfig Cloud for Scanning	149
Reset the Factory Defaults	149

Chapter 8 - Serial Programming Commands151

Menu Command Syntax.....	151
Query Commands	152
Trigger Commands.....	154
Read Time-Out.....	154
Reset the Custom Defaults	155
Menu Commands	156
Product Default Settings	156
Program the Interface.....	156
Input/Output Selections	163
Prefix/Suffix Selections	166
Data Formatter Selections	167
Symbologies	168
Postal Codes	177
Utilities.....	177
Trigger Commands	178

Chapter 9 - Product Specifications179

Voyager 1250g Scanner Product Specifications	179
Depth of Field	180
Typical Performance.....	180
Standard Cable Pinouts	180
Keyboard Wedge	181

Serial Output	181
RS485 Output.....	181
USB	182
Scanner Laser Beam	184
Embedded Laser.....	184

Chapter 10 - Maintenance and Troubleshooting185

Repairs	185
Maintenance.....	185
Clean the Device:.....	185
Inspect Cords and Connectors	185
Replace Cables	186
Replace an Interface Cable	186
Troubleshoot a Voyager Scanner.....	186

Chapter A - Reference Charts189

Symbology Charts	189
Linear Symbologies.....	189
2D Symbologies	190
Postal Symbologies	191
ASCII Conversion Chart (Code Page 1252).....	192
Lower ASCII Reference Table	193
ISO 2022/ISO 646 Character Replacements.....	196
Keyboard Key References	199
Sample Symbols.....	201
Programming Chart.....	202

Customer Support

Technical Assistance

To search our knowledge base for a solution or to log in to the Technical Support portal and report a problem, go to www.hsmcontactsupport.com.

Product Service and Repair

Honeywell International Inc. provides service for all of its products through service centers throughout the world. To obtain warranty or non-warranty service, you must first obtain a Return Material Authorization number (RMA #) and then return your product to Honeywell (postage paid) with a copy of the dated purchase record. To learn more, go to www.honeywellaidc.com and select Service & Repair at the bottom of the page.

Limited Warranty

For warranty information, go to www.honeywellaidc.com and click **Get Resources > Product Warranty**.

Send Feedback

Your feedback is crucial to the continual improvement of our documentation. To provide feedback about this manual, contact the Honeywell Technical Communications department at ACSHSMTechnicalCommunications@honeywell.com.

GET STARTED

About This Manual

This User's Guide provides installation and programming instructions for the Voyager 1250g single-line laser scanner. Product specifications, dimensions, warranty, and customer support information are also included.

Honeywell bar code scanners are factory programmed for the most common terminal and communications settings. If you need to change these settings, programming is accomplished by scanning the bar codes in this guide.

An asterisk (*) next to an option indicates the default setting.

Unpack Your Device

After you open the shipping carton containing the product, take the following steps:


- Check for damage during shipment. Report damage immediately to the carrier who delivered the carton.
- Make sure the items in the carton match your order.
- Save the shipping container for later storage or shipping.

Connect the Device

Connect with USB

A scanner can be connected to the USB port of a computer.

1. Connect the appropriate interface cable to the scanner first, then to the computer.

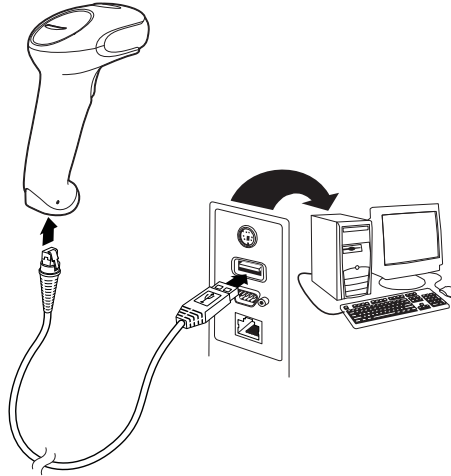

2. The scanner beeps.
3. Verify the scanner operation by scanning a bar code from the [Sample Symbols](#) on page 201.


The unit defaults to a USB PC Keyboard. Refer to [page 11](#) for other USB terminal settings.

For additional USB programming and technical information, refer to “USB Application Note,” available at www.honeywellaidc.com.

Connect with Keyboard Wedge

A scanner can be connected between the keyboard and PC as a “keyboard wedge,” plugged into the serial port, or connected to a portable data terminal in wand emulation or non decoded output mode. The following is an example of a keyboard wedge connection:

1. Turn off power and disconnect the keyboard cable from the back of the terminal/computer.
2. Connect the appropriate interface cable to the scanner and to the terminal/computer.

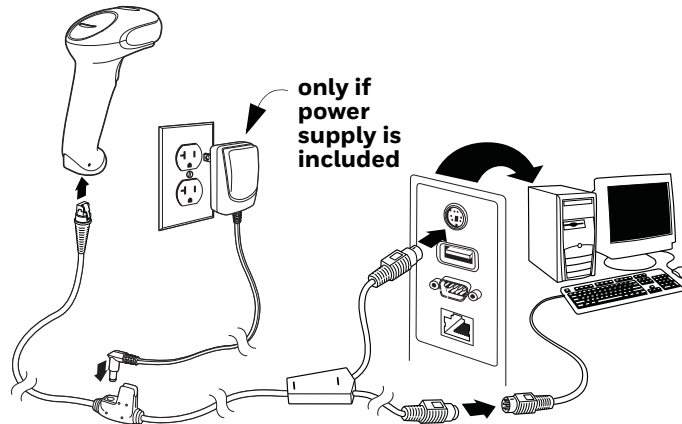


3. Turn the terminal/computer power back on. The scanner beeps.
4. Verify the scanner operation by scanning a bar code from the [Sample Symbols](#) on page 201. The scanner beeps once.

The unit defaults to an IBM PC AT and compatibles keyboard wedge interface with a USA keyboard. A carriage return (CR) suffix is added to bar code data.

Connect with RS232 Serial Port

1. Turn off power to the terminal/computer.
2. Connect the appropriate interface cable to the scanner.

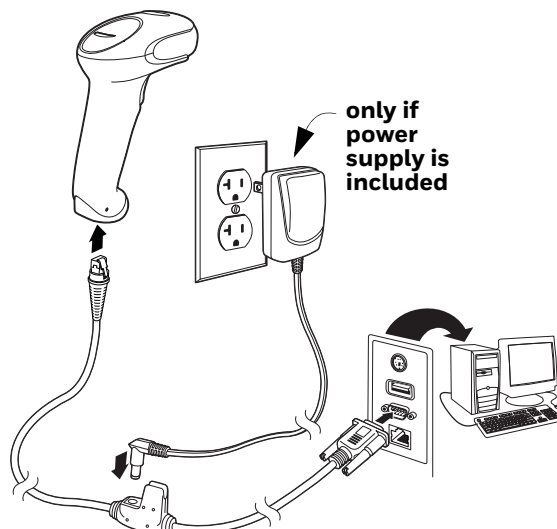


3. Plug the serial connector into the serial port on your computer. Tighten the two screws to secure the connector to the port.
4. Once the scanner has been fully connected, power up the computer.

This interface programs 9600 baud, 8 data bits, no parity, and 1 stop bit.

Connect with RS485

A scanner can be connected for an IBM POS terminal interface.

- a. Connect the appropriate interface cable to the device, then to the computer.

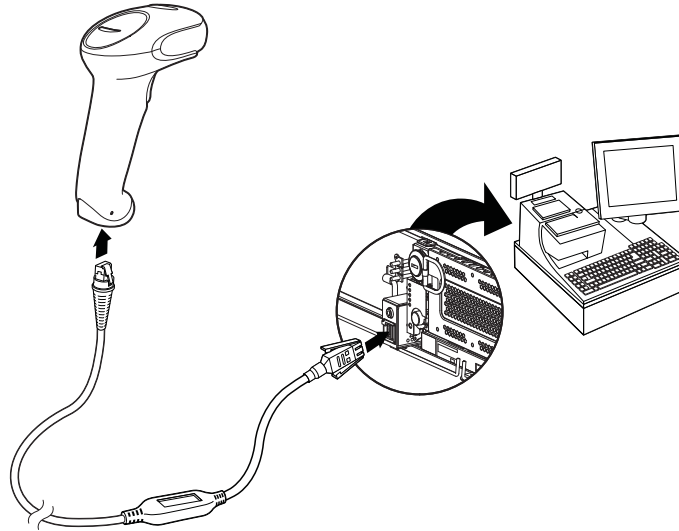


- b. Turn the terminal/computer power back on. The scanner beeps.
- c. Verify the scanner operation by scanning a bar code from the [Sample Symbols](#) on page 201. The scanner beeps once.

For further RS485 settings, refer to [RS485](#), page 8.

Reading Techniques

The scanner has a view finder that projects a bright red aiming beam that corresponds to the scanner's horizontal field of view. The aiming beam should be centered horizontally over the bar code and must highlight all the vertical bars of the bar code. It will not read if the aiming beam is in any other direction.

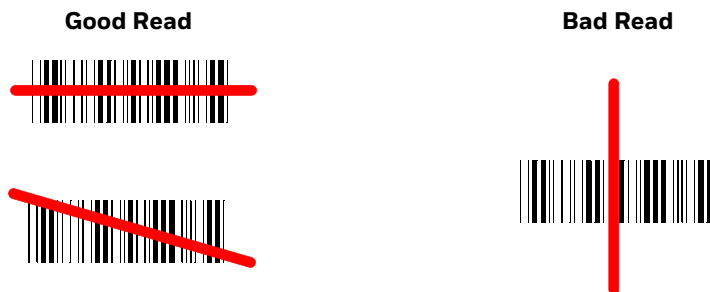

The aiming beam is smaller when the scanner is closer to the code and larger when it is farther from the code. Symbologies with smaller bars or elements (mil size) should be read closer to the unit. Symbologies with larger bars or elements (mil size) should be read farther from the unit. To read single or multiple symbols (on a page or on an object), hold the scanner at an appropriate distance from the target, pull the trigger, and center the aiming beam on the symbol. If the code being scanned is highly reflective (e.g., laminated), it may be necessary to tilt the code up 15° to 18° to prevent unwanted reflection.

Menu Bar Code Security Settings

Honeywell scanners are programmed by scanning menu bar codes or by sending serial commands to the scanner. If you want to restrict the ability to scan menu codes, you can use the Menu Bar Code Security settings. Please contact the nearest technical support office (see [Customer Support](#) on page xiii) for further information.

Set Custom Defaults

You have the ability to create a set of menu commands as your own, custom defaults. To do so, scan the **Set Custom Defaults** bar code below before each menu command or sequence you want saved. If your command requires scanning numeric codes from the [Programming Chart](#) on page 202, then a [Save](#) code, that entire sequence will be saved to your custom defaults. Scan the **Set Custom Defaults** code again before the next command you want saved to your custom defaults.

When you have entered all the commands you want to save for your custom defaults, scan the **Save Custom Defaults** bar code.



You may have a series of custom settings and want to correct a single setting. To do so, just scan the new setting to overwrite the old one. For example, if you had previously saved the setting for Beeper Volume at Low to your custom defaults, and decide you want the beeper volume set to High, scan the **Set Custom Defaults** bar code, then scan the **Beeper Volume High** menu code, and then **Save Custom Defaults**. The rest of the custom defaults will remain, but the beeper volume setting will be updated.

Reset the Custom Defaults

If you want the custom default settings restored to your scanner, scan the **Activate Custom Defaults** bar code below. This resets the scanner to the custom default settings. If there are no custom defaults, it will reset the scanner to the factory default settings. Any settings that have not been specified through the custom defaults will be defaulted to the factory default settings.



DEFAULT.

Activate Custom Defaults

PROGRAM THE INTERFACE

Introduction

This chapter describes how to program your system for the desired interface.

Program the Interface - Plug and Play

Plug and Play bar codes provide instant scanner set up for commonly used interfaces.

Note: After you scan one of the codes, power cycle the host terminal to have the interface in effect.

Keyboard Wedge

If you want your system programmed for an IBM PC AT and compatibles keyboard wedge interface with a USA keyboard, scan the bar code below. Keyboard wedge is the default interface.

Note: The following bar code also programs a carriage return (CR) suffix.



PAP_AT.

IBM PC AT and Compatibles with CR Suffix

IBM PS2 Keyboard

The following bar code programs your scanner for an IBM PS2 keyboard wedge interface with a USA keyboard.

Note: The following bar code also programs a carriage return (CR) suffix.



RS232 Serial Port

The **RS232 Interface** bar code is used when connecting to the serial port of a PC or terminal. The following RS232 Interface bar code also programs a carriage return (CR) and a line feed (LF) suffix, baud rate, and data format as indicated below.

Option	Setting
Baud Rate	9600 bps
Data Format	8 data bits, no parity bit, 1 stop bit



Note: To reset the scanner factory default baud rate of 9600 bps, see [Reset the Custom Defaults](#) on page 155.

RS485

Scan one of the following “Plug and Play” codes to program the scanner for an IBM POS terminal interface.

Note: After scanning one of these codes, you must power cycle the cash register





Each bar code above also programs the following suffixes for each symbology:

Symbology	Suffix	Symbology	Suffix
EAN 8	0C	Code 39	00 0A 0B
EAN 13	16	Interleaved 2 of 5	00 0D 0B
UPC A	0D	Code 128 *	00 0A 0B
UPC E	0A	Code 128 **	00 18 0B

* Suffixes programmed for Code 128 with IBM 4683 Port 5B, IBM 4683 Port 9B HHBCR-1, and IBM 4683 Port 17 Interfaces

** Suffixes programmed for Code 128 with IBM 4683 Port 9 HHBCR-2 Interface

OPOS Mode

The following bar code configures your scanner for OPOS (OLE for Retail Point of Sale) by modifying the following OPOS-related settings:

Option	Setting
Interface	RS232
Baud Rate	38400
RS232 Handshaking	Flow Control, No Timeout
	XON/XOFF Off
	ACK/NAK Off
Data Bits, Stop Bits, and Parity	8 Data, 1 Stop, Parity None
Prefix/Suffix	Clear All Prefixes and Suffixes
	Add Code ID and AIM ID Prefix
	Add CR Suffix
Intercharacter Delay	Off
Symbologies	Enable UPC-A with check digit and number system
	Enable UPC-E0 with check digit
	Enable EAN/JAN-8 with check digit
	Enable EAN/JAN-13 with check digit
	Enable Code 128
	Enable Code 39
	Enable OPOS with automatic disable off



USB IBM SurePos

Scan one of the following “Plug and Play” codes to program the scanner for an IBM SurePos (USB handheld scanner) or IBM SurePos (USB tabletop scanner) interface.

Note: After scanning one of these codes, you must power cycle the cash register.



**USB IBM SurePos
(USB Handheld Scanner) Interface**



**USB IBM SurePos
(USB Tabletop Scanner) Interface**

Each bar code above also programs the following suffixes for each symbology:

Symbology	Suffix	Symbology	Suffix
EAN 8	0C	Code 39	00 0A 0B
EAN 13	16	Interleaved 2 of 5	00 0D 0B
UPC A	0D	Code 128	00 18 0B
UPC E	0A	Code 39	00 0A 0B

IBM Secondary Interface

On some older IBM cash registers, it may be necessary to disable the secondary or management interface. In particular, it has been found necessary on IBM registers using the 4690 V2R4 operating system. The following bar codes are used for this purpose. *Default = Enable Secondary Interface.*



***Enable Secondary Interface**



Disable Secondary Interface

USB PC or Macintosh Keyboard

Scan one of the following codes to program the scanner for USB PC Keyboard or USB Macintosh Keyboard. Scanning these codes also adds a CR and LF.



PAF124.

USB Keyboard (PC)



PAF125.

USB Keyboard (Mac)



PAF134.

USB Japanese Keyboard (PC)

USB HID

Scan the following code to program the scanner for a USB HID bar code scanner.



PAF131.

USB HID Bar Code Scanner

HID Fallback Mode

If you attempt to set a USB interface for your scanner, but the setup fails on the host system, you can program the scanner to fall back to a HID keyboard interface after a set length of time. For example, if the scanner is configured for Serial Emulation Mode, but the host system does not have the correct driver, the scanner would fail. If you set the HID Fallback Mode for a set length of time, for example, 5 minutes, the scanner would change to a HID keyboard interface after 5 minutes of trying to configure as serial emulation.

A unique beep sequence indicates that this mode has been entered. While in HID Fallback Mode, the scanner will not scan normal bar codes and sounds a unique beep sequence that indicates the scanner is in Fallback Mode. Menu codes can still be scanned while in HID Fallback Mode, allowing you to change the scanner's programming.

Scan the bar code below, then set the length for the HID Fallback (from 0-60 minutes) by scanning digits from the [Programming Chart](#) on page 202, then scanning the [Save](#) code. *Default = 5 minutes.*



USBFT0.

HID Fallback Mode

USB Serial Commands

USB Serial Emulation

Scan one of the following codes to program the scanner to emulate a regular RS232-based COM Port. If you are using a Microsoft® Windows® PC, you will need to download the USB serial driver from the Honeywell website (www.honeywellaidc.com). The driver will use the next available COM Port number. Apple® Macintosh computers recognize the scanner as a USB CDC class device and automatically use a class driver.

Scanning either of these codes also adds a CR and LF.



PAP130.

**USB Serial Emulation for
Windows XP, Windows Server
2003, and later**



PAP130;REMIFC0.

USB Serial Emulation for Windows 2000

Note: *No extra configuration (e.g., baud rate) is necessary.*

CTS/RTS Emulation



USBCTS1.

CTS/RTS Emulation On



USBCTS0.

*** CTS/RTS Emulation Off**

ACK/NAK Mode



USBACK1.
ACK/NAK Mode On



USBACK0.
*** ACK/NAK Mode Off**

Communication Timeout

This allows you to set the length (in milliseconds) for a timeout for the host ACK/NAK response. Scan the bar code below, then set the timeout (from 0-65535 milliseconds) by scanning digits from the [Programming Chart](#) on page 202, then scanning [Save](#). *Default = 2000 ms.*



232DLK.
Communication Timeout

Timeout Retries

This setting limits the number of Communication Timeout retries. If the **Timeout Retries** is set to **0**, the transmission is terminated after the initial Communication Timeout. Scan the bar code below, then set the number of retries (from 0-255) by scanning digits from the [Programming Chart](#) on page 202, then scanning [Save](#). (5 is the recommended setting.) *Default = 0.*



HSTRTY.
Timeout Retries

Communication Timeout Beeper

This selection programs the scanner to issue an error beep when a communication timeout has occurred. The error beep sound is programmed using [Number of Beeps – Error](#) (page 44). *Default = On.*



HSTTOA0.
off



HSTTOA1.
*** On**

NAK Retries

This selection limits the number of NAK retries that can occur in ACK/NAK mode. Scan the bar code below, then set the number of retries (from 0-255) by scanning digits from the [Programming Chart](#) on page 202, then scanning [Save](#). (5 is the recommended setting.) *Default = 0, or disabled.*



Support BEL/CAN in ACK/NAK

This protocol responds to <BEL> and <CAN> commands when in ACK/NAK mode. The scanner sounds an error tone when a <BEL> command is sent from the host. <CAN> terminates the transmission. *Default = BEL/CAN Off.*



Verifone[®] Ruby Terminal Default Settings

Scan the following Plug and Play code to program the scanner for a Verifone Ruby terminal. This bar code sets the baud rate to 1200 bps and the data format to 8 data bits, Mark parity, 1 stop bit and RTS/CTS no timeout. It also adds a line feed (LF) suffix and programs the following prefixes for each symbology:

Symbology	Prefix
UPC-A	A
UPC-E	A
EAN-8	FF
EAN-13	F



PAPRBY.

Verifone Ruby Settings

Note: If you are having unexpected results with this programming code, scan the **Activate Defaults** bar code on [page 149](#) first, then scan the programming bar code above.

Gilbarco[®] Terminal Default Settings

Scan the following Plug and Play code to program the scanner for a Gilbarco terminal. This bar code sets the baud rate to 2400 bps and the data format to 7 data bits, even parity, 2 stop bits. It also adds a carriage return (CR) suffix and programs the following prefixes for each symbology:

Symbology	Prefix
UPC-A	A
UPC-E	EO
EAN-8	FF
EAN-13	F



PAPGLB.

Gilbarco Settings

Note: If you are having unexpected results with this programming code, scan the **Activate Defaults** bar code on [page 149](#) first, then scan the programming bar code above.

Honeywell Bioptic Aux Port Configuration

Scan the following Plug and Play code to program the scanner for a Honeywell bioptic scanner auxiliary port configuration. This bar code sets the baud rate to 38400 bps and the data format to 8 data bits, no parity, 1 stop bit. Character RTS/CTS with timeout and 232 ACK/NAK are also enabled.



PAPBIO.

Honeywell Bioptic Settings

Note: If you are having unexpected results with this programming code, scan the **Activate Defaults** bar code on [page 149](#) first, then scan the programming bar code above.

Datalogic™ Magellan[®] Bioptic Aux Port Configuration

Scan the following Plug and Play code to program the scanner for a Datalogic Magellan bioptic scanner auxiliary port configuration. This bar code sets the baud rate to 9600 bps and the data format to 8 data bits, no parity, 1 stop bit.



PAPMAG.

Datalogic Magellan Bioptic Settings

Note: If you are having unexpected results with this programming code, scan the **Activate Defaults** bar code on [page 149](#) first, then scan the programming bar code above.

NCR Bioptic Aux Port Configuration

Scan the following Plug and Play code to program the scanner for an NCR bioptic scanner auxiliary port configuration. This bar code sets the baud rate to 9600 bps and the data format to 7 data bits, Even parity, 1 stop bit and Message RTS/CTS with timeout. The following prefixes are programmed for each symbology:

Symbology	Prefix	Symbology	Prefix
UPC-A	A	Interleaved 2 of 5	b
UPC-E	E0	Code 128	f
EAN-8	FF	GS1 DataBar Omnidirectional	r
EAN-13	F	GS1 DataBar Expanded	r
Code 39	a	Codabar	N
		Code 32 Pharmaceutical (PARAF)	a



PAPNCR.

NCR Bioptic Settings

Note: If you are having unexpected results with this programming code, scan the **Activate Defaults** bar code on [page 149](#) first, then scan the programming bar code above.

Wincor Nixdorf Terminal Default Settings

Scan the following Plug and Play code to program the scanner for a Wincor Nixdorf terminal. This bar code sets the baud rate to 9600 bps and the data format to 8 data bits, no parity, 1 stop bit.



PAPWNX.

Wincor Nixdorf Terminal Settings

Note: If you are having unexpected results with this programming code, scan the **Activate Defaults** bar code on [page 149](#) first, then scan the programming bar code above.

Wincor Nixdorf Beetle™ Terminal Default Settings

Scan the following Plug and Play code to program the scanner for a Wincor Nixdorf Beetle terminal. The following prefixes are programmed for each symbology:

Symbology	Prefix	Symbology	Prefix
Aztec Code	V	Interleaved 2 of 5	I
Codabar	N	MaxiCode	T
Code 93	L	MicroPDF417	S
Code 128	K	PDF417	Q
Data Matrix	R	QR Code	U
EAN-8	B	Straight 2 of 5 IATA	H
EAN-13	A	UPC-A	A0
GS1 DataBar	E	UPC-E	C
GS1-128	P	All other bar codes	M



PAPBTL.

Wincor Nixdorf Beetle Settings

Note: If you are having unexpected results with this programming code, scan the **Activate Defaults** bar code on [page 149](#) first, then scan the programming bar code above.

Wincor Nixdorf RS232 Mode A

Scan the following Plug and Play code to program the scanner for a Wincor Nixdorf RS232 Mode A terminal. The following prefixes are programmed for each symbology:

Symbology	Prefix	Symbology	Prefix
Code 128	K	EAN-13	A
Code 93	L	GS1-128	K
Codabar	N	Interleaved 2 of 5	I
UPC-A	A0	Plessey	O
UPC-E	C	Straight 2 of 5 IATA	H
EAN-8	B	GS1 DataBar	E
All other bar codes	M		



PAPWMA.

**Wincor Nixdorf RS232 Mode A
Settings**

Keyboard Country Layout

If your interface is USB Keyboard or Keyboard Wedge, your keyboard layout default is a US keyboard. To change this layout, scan the appropriate Keyboard Country bar code below. By default, national character replacements are used for the following characters: @ | \$ # { } [] = / ' \ < > ~ Refer to the [ISO 2022/ISO 646 Character Replacements](#) on page 196 to view the character replacements for each country.

Keyboard Countries



KBDCTY0.

*** United States**



KBDCTY35.

Albania



KBDCTY91.

Arabic



KBDCTY81.

Azeri (Cyrillic)

Keyboard Countries (Continued)



KBDCTY80.
Azeri (Latin)



KBDCTY1.
Belgium



KBDCTY16.
Brazil



KBDCTY52.
Bulgaria (Cyrillic)



KBDCTY54.
Canada (French legacy)



KBDCTY55.
Canada (Multilingual)



KBDCTY82.
Belarus



KBDCTY33.
Bosnia



KBDCTY59.
Brazil (MS)



KBDCTY53.
Bulgaria (Latin)



KBDCTY18.
Canada (French)



KBDCTY92.
China

Keyboard Countries (Continued)



KBDCTY32.
Croatia



KBDCTY15.
Czech



KBDCTY40.
Czech (Programmers)



KBDCTY39.
Czech (QWERTY)



KBDCTY38.
Czech (QWERTZ)



KBDCTY8.
Denmark



KBDCTY11.
Dutch (Netherlands)



KBDCTY41.
Estonia



KBDCTY83.
Faroese



KBDCTY2.
Finland



KBDCTY3.
France



KBDCTY84.
Gaelic

Keyboard Countries (Continued)



KBDCTY4.
Germany



KBDCTY64.
Greek (220 Latin)



KBDCTY65.
Greek (319 Latin)



KBDCTY63.
Greek (Latin)



KBDCTY60.
Greek (Polytonic)



KBDCTY50.
Hungarian (101 key)



KBDCTY17.
Greek



KBDCTY61.
Greek (220)



KBDCTY62.
Greek (319)



KBDCTY66.
Greek (MS)



KBDCTY12.
Hebrew



KBDCTY19.
Hungary

Keyboard Countries (Continued)



KBDCTY75.
Iceland



KBDCTY73.
Irish



KBDCTY56.
Italian (142)



KBDCTY5.
Italy



KBDCTY28.
Japan ASCII



KBDCTY93.
Korea



KBDCTY78.
Kazakh



KBDCTY79.
Kyrgyz (Cyrillic)



KBDCTY14.
Latin America



KBDCTY42.
Latvia



KBDCTY43.
Latvia (QWERTY)



KBDCTY44.
Lithuania

Keyboard Countries (Continued)



KBDCTY45.
Lithuania (IBM)



KBDCTY74.
Malta



KBDCTY9.
Norway



KBDCTY57.
Polish (214)



KBDCTY13.
Portugal



KBDCTY26.
Russia



KBDCTY34.
Macedonia



KBDCTY86.
Mongolian (Cyrillic)



KBDCTY20.
Poland



KBDCTY58.
Polish (Programmers)



KBDCTY25.
Romania



KBDCTY67.
Russian (MS)

Keyboard Countries (Continued)



KBDCTY68.
Russian (Typewriter)



KBDCTY37.
Serbia (Cyrillic)



KBDCTY22.
Slovakia



KBDCTY48.
Slovakia (QWERTZ)



KBDCTY10.
Spain



KBDCTY23.
Sweden



KBDCTY21.
SCS



KBDCTY36.
Serbia (Latin)



KBDCTY49.
Slovakia (QWERTY)



KBDCTY31.
Slovenia



KBDCTY51.
Spanish variation



KBDCTY29.
Switzerland (French)

Keyboard Countries (Continued)



KBDCTY6.
Switzerland (German)



KBDCTY94.
Thailand



KBDCTY24.
Turkey Q



KBDCTY7.
United Kingdom



KBDCTY88.
United States (Dvorak left)



KBDCTY30.
United States (International)



KBDCTY85.
Tatar



KBDCTY27.
Turkey F



KBDCTY76.
Ukrainian



KBDCTY87.
United States (Dvorak)



KBDCTY89.
United States (Dvorak)



KBDCTY77.
Uzbek (Cyrillic)

Keyboard Countries (Continued)



KBDCTY95.
Vietnam

Keyboard Wedge Modifiers

ALT Mode

If your bar code contains special characters from the extended ASCII chart for example, an e with an accent grave (è), you will use ALT Mode. (See [Extended ASCII Characters](#) on page 193.)

Note: Scan the ALT mode bar code after scanning the appropriate Keyboard Country code.

If your keystrokes require using the ALT key and 3 characters, scan the **3 Characters** bar code. If your keystrokes require the ALT key and 4 characters, scan the **4 Characters** bar code. The data is then output with the special character(s). *Default = Off.*



KBDALT0.
* Off



KBDALT6.
3 Characters



KBDALT7.
4 Characters

Keyboard Style

This programs keyboard styles, such as Caps Lock and Shift Lock. If you have used [Keyboard Conversion](#) settings, they will override any of the following Keyboard Style settings. *Default = Regular.*

Regular is used when you normally have the Caps Lock key off.



KBDSTY0.
* Regular

Caps Lock is used when you normally have the Caps Lock key on.



Shift Lock is used when you normally have the Shift Lock key on (not common to U.S. keyboards).



Autocaps via NumLock bar code should be scanned in countries (e.g., Germany, France) where the Caps Lock key cannot be used to toggle Caps Lock. The NumLock option works similarly to the regular Autocaps, but uses the NumLock key to retrieve the current state of the Caps Lock.



Emulate External Keyboard should be scanned if you do not have an external keyboard (IBM AT or equivalent).



Note: After scanning the **Emulate External Keyboard** bar code, you must power cycle your computer.

Keyboard Conversion

Alphabetic keyboard characters can be forced to be all upper case or all lowercase. So if you have the following bar code: “abc569GK,” you can make the output “ABC569GK” by scanning **Convert All Characters to Upper Case**, or to “abc569gk” by scanning **Convert All Characters to Lower Case**. These settings override [Keyboard Style](#) selections. *Default = Keyboard Conversion Off.*





KBDCNV2.

Convert All Characters to Lower Case

Keyboard Modifiers

This modifies special keyboard features, such as CTRL+ ASCII codes and Turbo Mode.

Control + X (Control + ASCII) Mode On: The scanner sends key combinations for ASCII control characters for values 00-1F. Windows is the preferred mode. All keyboard country codes are supported. DOS mode is a legacy mode, and it does not support all keyboard country codes. New users should use the Windows mode. Refer to [ASCII Conversion Chart \(Code Page 1252\)](#), page 192 for CTRL+ X Values.

Windows Mode Prefix/Suffix Off: The scanner sends key combinations for ASCII control characters for values 00-1F, but it does not translate prefix or suffix information.

Default = Control + X Mode Off.



KBDCAS2.

Windows Mode Control + X Mode On



KBDCAS0.

*** Control + X Mode Off**



KBDCAS1.

DOS Mode Control + X Mode On



KBDCAS3.

Windows Mode Prefix/Suffix

Numeric Keypad Mode: Sends numeric characters as if entered from a numeric keypad. *Default = Off.*



KBDNPS1.

Numeric Keypad Mode On



Inter-Scan Code Delay

When your keyboard detects that any key is being pressed, released, or held down, the keyboard sends a packet of information known as a “scan code” to your computer. This selection allows you to adjust the delay between scan codes. Set the length (in milliseconds) for a delay by scanning the bar code below, then setting the delay (from 1-30) by scanning digits from the [Programming Chart](#) on page 202, then scanning [Save](#). *Default = 0 (800 μ s).*



<F0> Break Character

When your keyboard detects that any key is being pressed, released, or held down, the keyboard sends a packet of information known as a “scan code” to your computer. There are two different types of scan codes: “make codes” and “break codes.” A make code is sent when a key is pressed or held down. A break code is sent when a key is released. The following selections allow you to suppress or transmit the character sequence of the break code. *Default = Transmit.*



Keyboard Wedge Defaults

If you want the custom keyboard wedge default settings restored to your scanner, scan the **Keyboard Wedge Defaults** bar code below. This resets the scanner to the custom default settings (see [Set Custom Defaults](#) on page 5). If there are no custom defaults, it will reset the scanner to the factory default settings. Any settings that have not been specified through the custom defaults will be defaulted to the factory default settings.



RS232 Modifiers

RS232 Baud Rate

Baud Rate sends the data from the scanner to the terminal at the specified rate. The host terminal must be set for the same baud rate as the scanner. *Default = 9600.*



232BAD0.
300



232BAD1.
600



232BAD2.
1200



232BAD3.
2400



232BAD4.
4800



232BAD5.
*** 9600**



232BAD6.
19200



232BAD7.
38400



232BAD8.
57,600



232BAD9.

115,200

RS232 Word Length: Data Bits, Stop Bits, and Parity

Data Bits sets the word length at 7 or 8 bits of data per character. If an application requires only ASCII Hex characters 0 through 7F decimal (text, digits, and punctuation), select 7 data bits. For applications that require use of the full ASCII set, select 8 data bits per character. *Default = 8.*

Stop Bits sets the stop bits at 1 or 2. *Default = 1.*

Parity provides a means of checking character bit patterns for validity. *Default = None.*



232WRD3.

7 Data, 1 Stop, Parity Even



232WRD0.

7 Data, 1 Stop, Parity None



232WRD6.

7 Data, 1 Stop, Parity Odd



232WRD4.

7 Data, 2 Stop, Parity Even



232WRD1.

7 Data, 2 Stop Parity None



232WRD7.

7 Data, 2 Stop, Parity Odd



232WRD5.

8 Data, 1 Stop, Parity Even



RS232 Handshaking

RS232 Handshaking allows control of data transmission from the scanner using software commands from the host device. When RTS/CTS is turned Off, no data flow control is used.

Flow Control, No Timeout: The scanner asserts RTS when it has data to send, and will wait indefinitely for CTS to be asserted by the host.

Character-Based Flow Control, No Timeout: The scanner asserts RTS when it has a character to send, and will wait indefinitely for CTS to be asserted by the host

Two-Direction Flow Control: The scanner asserts RTS when it is OK for the host to transmit. The host asserts CTS when it is OK for the device to transmit.

Flow Control with Timeout: The scanner asserts RTS when it has data to send and waits for a delay (see [RS232 Timeout](#) on page 33) for CTS to be asserted by the host. If the delay time expires and CTS is not asserted, the device transmit buffer is cleared and scanning may resume.

Character-Based Flow Control with Timeout: The scanner asserts RTS when it has a character to send and waits for a delay (see [RS232 Timeout](#) on page 33) for CTS to be asserted by the host. If the delay time expires and CTS is not asserted, the device transmit buffer is cleared and scanning may resume.

Default = RTS/CTS Off.



232CTS1.

Flow Control, No Timeout



232CTS7.

**Character-Based Flow Control,
No Timeout**



232CTS2.

Two-Direction Flow Control



232CTS3.

Flow Control with Timeout



232CTS9.

**Character-Based Flow
Control with Timeout**



232CTS0.

*** RTS/CTS Off**

RS232 Timeout

When using **Flow Control with Timeout**, you must program the length of the delay you want to wait for CTS from the host. Set the length (in milliseconds) for a timeout by scanning the bar code below, then setting the timeout (from 1-5100 milliseconds) by scanning digits from the [Programming Chart](#) on page 202, then scanning [Save](#). *Default = 1000 ms (1 second).*



232DEL.

RS232 Timeout

XON/XOFF

Standard ASCII control characters can be used to tell the scanner to start sending data (XON/XOFF On) or to stop sending data (XON/XOFF Off). When the host sends the XOFF character (DC3, hex 13) to the scanner, data transmission stops. To resume transmission, the host sends the XON character (DC1, hex 11). Data transmission continues where it left off when XOFF was sent. *Default = XON/XOFF Off.*



232XON1.
XON/XOFF On



232XON0.
*** XON/XOFF Off**

ACK/NAK

After transmitting data, the scanner waits for an ACK character (hex 06) or a NAK character (hex 15) response from the host. If ACK is received, the communications cycle is completed and the scanner looks for more bar codes. If NAK is received, the last set of bar code data is retransmitted and the scanner waits for ACK/NAK again. Turn on the ACK/NAK protocol by scanning the **ACK/NAK On** bar code below. To turn off the protocol, scan **ACK/NAK Off**. *Default = ACK/NAK Off.*



232ACK1.
ACK/NAK On



232ACK0.
*** ACK/NAK Off**

Communication Timeout

This allows you to set the length (in milliseconds) for a timeout for the host ACK/NAK response. Scan the bar code below, then set the timeout (from 1-65535 milliseconds) by scanning digits from the [Programming Chart](#) on page 202, then scanning [Save](#). *Default = 2000 ms.*



232DLK.
Communication Timeout

Timeout Retries

This setting limits the number of Communication Timeout retries. If the Timeout Retries is set to 0, the transmission is terminated after the initial Communication Timeout. Scan the bar code below, then set the number of retries (from 0-255) by scanning digits from the [Programming Chart](#) on page 202, then scanning [Save](#). (5 is the recommended setting.) *Default = 0.*



HSTRTY.
Timeout Retries

Communication Timeout Beeper

This selection programs the scanner to issue an error beep when a communication timeout has occurred. The error beep sound is programmed using [Number of Beeps – Error](#) (page 44). *Default = On.*



HSTTOA0.
Off



HSTTOA1.
* On

NAK Retries

This selection limits the number of NAK retries that can occur in ACK/NAK mode. Scan the bar code below, then set the number of retries (from 0-255) by scanning digits from the [Programming Chart](#) on page 202, then scanning [Save](#). (5 is the recommended setting.) *Default = 0, or disabled.*



HSTRTN.
NAK Retries

Support BEL/CAN in ACK/NAK

This protocol responds to <BEL> and <CAN> commands when in ACK/NAK mode. The scanner sounds an error tone when a <BEL> command is sent from the host. <CAN> terminates the transmission. *Default = BEL/CAN Off.*



BELCAN1.
BEL/CAN On



RS232 Defaults

If you want the custom RS232 default settings restored to your scanner, scan the **RS232 Defaults** bar code below. This resets the scanner to the custom default settings (see [Set Custom Defaults](#) on page 5). If there are no custom defaults, it will reset the scanner to the factory default settings. Any settings that have not been specified through the custom defaults will be restored to the factory default settings.



NCR Modifiers

NCR ACK/NAK

This is an NCR communication protocol for ACK/NAK processing. *Default = NCR ACK/NAK Off.*



Block Check Character

When this selection is set to **Transmit**, the NCR Block Check Character (BCC) is expected with incoming messages and transmitted with outgoing messages. *Default = Transmit.*





NCRBCD0.
Don't Transmit

NCR Prefix

This selection allows you to program an NCR-specific prefix. Refer to the [ASCII Conversion Chart \(Code Page 1252\)](#) on page 192 to find the hex equivalent for the characters you want for the NCR prefix (typically, 02 for STX). Scan the bar code below, then set the hex number (from 0-FF) by scanning digits from the [Programming Chart](#) on page 202, then scanning [Save](#). *Default = 0.*



NCRPR2.
NCR Prefix

NCR Suffix

This selection allows you to program an NCR-specific suffix. Refer to the [ASCII Conversion Chart \(Code Page 1252\)](#) on page 192 to find the hex equivalent for the characters you want for the NCR suffix (typically, 03 for ETX). Scan the bar code below, then set the hex number (from 0-FF) by scanning digits from the [Programming Chart](#) on page 202, then scanning [Save](#). *Default = 0.*



NCRSF2.
NCR Suffix

NCR Prefix/Suffix

When set to **Transmit**, both the NCR prefix and suffix are transmitted with bar codes. Usually, prefixes and suffixes are programmed using the Data Editing selections (see [Data Edit](#) beginning on page 61), however, the following commands override any other prefix/suffix settings. *Default = Don't Transmit.*



NCRBCP1.
Transmit



NCRBCP0.
*** Don't Transmit**

NCR NOF (Not-on-File) Error

A scanner receives an NOF (Not on File) command from the POS whenever it cannot cross-reference the bar code to a price parameter. When set to **On**, the error tone sounds (set via [Number of Beeps – Error](#), page 3-44) for an NOF, and disables the scanner while the cashier looks up the price manually. When set to **Off**, no sound is emitted for an NOF. *Default = Off.*



Scanner to Bioptic Communication

The following settings are used to set up communication between Honeywell scanners and bioptic scanners.

Note: *The scanner's baud rate must be set to 38400 and the RS232 Timeout must be set to 3000 in order to communicate with a bioptic scanner. See [RS232 Modifiers](#) on page 30, and [RS232 Timeout](#) on page 33 for further information.*

Scanner-Bioptic Packet Mode

Packet Mode On must be scanned to set the scanner's format so it is compatible with a bioptic scanner. *Default = Packet Mode Off.*



ACK/NAK

After transmitting data, the scanner waits for an ACK character (hex 06) or a NAK character (hex 15) response from the host. If ACK is received, the communications cycle is completed and the scanner looks for more bar codes. If NAK is received, the

last set of bar code data is retransmitted and the scanner waits for ACK/NAK again. Turn on the ACK/NAK protocol by scanning the **ACK/NAK On** bar code below. To turn off the protocol, scan **ACK/NAK Off**. *Default = ACK/NAK Off.*



232ACK1.
ACK/NAK On



232ACK0.
*** ACK/NAK Off**

Communication Timeout

This allows you to set the length (in milliseconds) for a timeout for the host ACK/NAK response. Scan the bar code below, then set the timeout (from 1-65535 milliseconds) by scanning digits from the [Programming Chart](#) on page 202, then scanning [Save](#). *Default = 2000 ms.*



232DLK.
Communication Timeout

INPUT/OUTPUT SETTINGS

Power Up Beeper

The scanner can be programmed to beep when it's powered up. Scan the **Off** bar code(s) if you don't want a power up beep. *Default = Power Up Beeper On - Scanner.*



BEPPWR0.

**Power Up Beeper Off -
Scanner**



BEPPWR1.

*** Power Up Beeper On -
Scanner**

Beep on BEL Character

You may wish to force the scanner to beep upon a command sent from the host. If you scan the **Beep on BEL On** bar code below, the scanner will beep every time a BEL character is received from the host. *Default = Beep on BEL Off.*



BELBEP0.

***Beep on BEL Off**



BELBEP1.

Beep on BEL On

Good Read and Error Indicators

Beeper – Good Read

The beeper may be programmed **On** or **Off** in response to a good read. Turning this option off, only turns off the beeper response to a good read indication. All error and menu beeps are still audible. *Default = Beeper - Good Read On.*



BEPBEP0.

Beeper – Good Read Off



BEPBEP1.

*** Beeper – Good Read On**

Beeper Volume – Good Read

The beeper volume codes modify the volume of the beep the scanner emits on a good read. *Default = High.*



BEPLVL1.

Low



BEPLVL2.

Medium



BEPLVL3.

*** High**



BEPLVL0.

Off

Beeper Pitch – Good Read

The beeper pitch codes modify the pitch (frequency) of the beep the scanner emits on a good read. *Default = Medium.*



BEPFQ11600.

Low (1600 Hz)



Beeper - Transmit Order

The beeper transmit order determines when the good read beep occurs. The scanner can be set to emit the good read beep either before or after data transmission. *Default = Before Transmission.*



Beeper Pitch – Error

The beeper pitch codes modify the pitch (frequency) of the sound the scanner emits when there is a bad read or error. *Default = Razz.*



Beeper Duration – Good Read

The beeper duration codes modify the length of the beep the scanner emits on a good read. *Default = Normal.*



Number of Beeps – Good Read

The number of beeps of a good read can be programmed from 1 - 9. The same number of beeps will be applied to the beeper and LED in response to a good read. For example, if you program this option to have five beeps, there will be five beeps and five LED flashes in response to a good read. The beeps and LED flashes are in sync with one another.

Note: The LEDs can also be programmed separately. See [LED Settings](#) on page 45.

To change the number of beeps, scan the bar code below and then scan a digit (1-9) bar code from the [Programming Chart](#) on page 202, then scan [Save](#). Default = 1.



Number of Beeps – Error

The number of beeps and LED flashes emitted by the scanner for a bad read or error can be programmed from 1 - 9. For example, if you program this option to have five error beeps, there will be five error beeps and five LED flashes in response to an error.

Note: The LEDs can also be programmed separately. See [LED Settings](#) on page 45.

To change the number of error beeps, scan the bar code below and then scan a digit (1-9) bar code from the [Programming Chart](#) on page 202, then scan [Save](#). Default = 1.



LED Indicators

The green and red LEDs can be programmed to be **On** or **Off** and at different brightness levels to indicate various scanner states. Use the following bar codes to program the LED indicators.

LED Settings

Default = Red LED Off, Green LED On with Good Scan.



LEDFN10.
* Red LED Off



LEDFN20.
Green LED Off



LEDFN11.
Red LED On with Good Scan



LEDFN21.
* Green LED On with Good Scan



LEDFN12.
Red LED On with Laser



LEDFN22.
Green LED On with Laser



LEDFN14.
Red LED On when CodeGate Disabled



LEDFN24.
Green LED On when CodeGate Disabled



LEDFN18.
Red LED On when In-Stand



LEDFN28.
Green LED On when In-Stand



LEDFN128.
Red LED On with CTS



LEDFN2128.

Green LED On with CTS

LED Brightness

Default = Red High, Green High.



LEDIN10.

Red Off



LEDIN20.

Green Off



LEDIN11.

Red Low



LEDIN21.

Green Low



LEDIN12.

Red Medium



LEDIN22.

Green Medium



LEDIN13.

* Red High



LEDIN23.

* Green High

In-Stand and Out-Of-Stand Settings

The following settings program the scanner's behavior when it is either in the stand, or out of the stand (hand-held).



Caution: When working with In-Stand and Out-of-Stand settings, enable the settings you want before disabling those you do not want to use. If you disable settings first, you may program the scanner so it is unable to read bar codes. If this happens, power cycle the scanner and scan the defaults bar code on [page 6](#).

In-Stand and Out-of-Stand Defaults

If you want the In-Stand or Out-of-Stand default settings restored to your scanner, scan the appropriate **Defaults** bar code below. They reset the scanner to the custom default settings (see [Set Custom Defaults](#) on page 5). If there are no custom defaults, it will reset the scanner to the factory default settings. Any settings that have not been specified through the custom defaults will be defaulted to the factory default settings.



AISDFT.

In-Stand Defaults



AOSDFT.

Out-of-Stand Defaults

Presentation Modes

When the scanner is in the stand, by default, bar codes are automatically read when they are detected in the scanner's field of view. When the scanner is out of the stand, by default you must pull the trigger to read a bar code. Use the following commands to adjust how the scanner behaves when it is out of the stand.

Presentation Mode Out-of-Stand: When the scanner is not in the stand, it automatically detects bar codes, then scans and transmits the data. The laser turns off afterward. (If you are accustomed to a Voyager 9520, this setting is the same as the 9520's default.)

Presentation Mode with CodeGate® Out-of-Stand: When the scanner is not in the stand, it automatically detects bar codes and decodes them. However, the data is not transmitted until you pull the trigger. The laser remains on briefly after the transmission. (If you are accustomed to a Voyager 9540, this setting is the same as the 9540's default.)



PAPPM1.

**Presentation Mode
Out-of-Stand**



PAPP2.
**Presentation Mode with
 CodeGate Out-of-Stand**

Manual Activation Mode

In Manual Activation Mode, you must pull the trigger to scan a bar code. The scanner scans until a bar code is read, or until the trigger is released. *Default = Manual Activation Mode Off In-Stand, Manual Activation On Out-of-Stand.*



AISMEN0.
**Manual Activation Mode Off
 In-Stand**



AOSMEN0.
**Manual Activation Mode Off
 Out-of-Stand**



AISMEN1.
*** Manual Activation Mode On
 In-Stand**



AOSMEN1.
*** Manual Activation Mode On
 Out-of-Stand**

End Manual Activation After Good Read

After a bar code is successfully read, the laser can be programmed either to remain on and scanning, or to turn off. When **End Manual Activation After Good Read** is enabled, the laser turns off and stops scanning after a good read. If you scan **Do Not End Manual Activation After Good Read**, the laser remains on after a good read, but the trigger must be pressed to scan the next bar code. *Default = End Manual Activation After Good Read.*



AISMGD0.
**Do Not End Manual Activation
 After Good Read In-Stand**



AISMGD1.
*** End Manual Activation After
 Good Read In-Stand**



AOSMGDD0.

**Do Not End Manual Activation
After Good Read Out-of-Stand**



AOSMGD1.

*** End Manual Activation After
Good Read Out-of-Stand**

Manual Activation Laser Timeout - Trigger Settings

You can set a timeout for the length of time the laser remains on and attempting to decode bar codes when the trigger is held down, and after it is released. Set the length (in milliseconds) for a timeout by scanning one of the bar codes below, then setting the timeout (from 1-65535 milliseconds) by scanning digits from the [Programming Chart](#) on page 202, then [Save](#). *Default = Trigger Hold In-Stand 5000 ms, Trigger Hold Out-of-Stand 30000 ms, Trigger Release In or Out-of-Stand 0.*



AISMPT.

**Laser Timeout - Trigger Hold
In-Stand**



AISMRT.

**Laser Timeout - Trigger
Release In-Stand**



AOSMPT.

**Laser Timeout - Trigger Hold
Out-of-Stand**



AOSMRT.

**Laser Timeout - Trigger
Release Out-of-Stand**

CodeGate®

When CodeGate is **On**, the trigger is used to allow decoded data to be transmitted to the host system. The scanner remains on, scanning and decoding bar codes, but the bar code data is not transmitted until the trigger is pressed. When CodeGate is **Off**, bar code data is transmitted when it is decoded. *Default = CodeGate Off in-Stand, CodeGate On Out-of-Stand.*



AISC GD0.
* CodeGate Off
In-Stand



AISC GD1.
CodeGate On
In-Stand



AOSC GD0.
CodeGate Off
Out-of-Stand



AOSC GD1.
* CodeGate On
Out-of-Stand

Object Detection Mode

Object Detection Mode uses an LED to detect when an object is in the scanner's field of view. When an object is detected, the laser turns on and the scanner attempts to scan the bar code. *Default = Object Detection Mode On In-Stand.*



AISO END.
Object Detection Mode Off
In-Stand



AISO EN1.
* Object Detection Mode On
In-Stand



AOSO END.
* Object Detection Mode Off
Out-of-Stand



AOSOEN1.

**Object Detection Mode On
Out-of-Stand**

End Object Detection After Good Read

After a bar code is successfully detected and read from the scanner, the laser can be programmed either to remain on and scanning, or to turn off. When **End Object Detection After Good Read** is enabled, the laser turns off and stops scanning after a good read. If you scan **Do Not End Object Detection After Good Read**, the laser remains on after a good read. *Default = End Object Detection After Good Read.*



AISOGD0.

**Do Not End Object Detection
After Good Read In-Stand**



AOSOGD0.

**Do Not End Object Detection
After Good Read Out-of-Stand**



AISOGD1.

*** End Object Detection After
Good Read In-Stand**



AOSOGD1.

*** End Object Detection After
Good Read Out-of-Stand**

Object Detection Laser Timeout

You can set a timeout for the length of time the laser remains on and attempting to decode bar codes after an object is detected. Set the length (in milliseconds) for a timeout by scanning the bar code below, then setting the timeout (from 1-65535 milliseconds) by scanning digits from the from the [Programming Chart](#) on page 202, then [Save](#). *Default = 5000 ms.*



AISODT.

**Object Detection Laser
Timeout In-Stand**



Object Detection Distance

When the scanner is in the stand and you are using Object Detection Mode, you can set the distance range for detecting objects. Short sets the scanner to detect objects approximately 5 inches (12.7cm) away from the nose. Long sets it to detect objects approximately 10 inches (25.4cm) away. *Default = Short In-Stand, Long Out-of-Stand.*



Character Activation Mode

You may use a character sent from the host to trigger the scanner to begin scanning. When the activation character is received, the scanner continues scanning until either the [Character Activation Laser Timeout](#) (page 3-53) is reached, the deactivation character is received (see [Deactivation Character](#) on page 54), or a bar code is transmitted. Scan the **On** bar code below to use character activation, then use Activation Character (following) to select the character you will send from the host to start scanning. *Default = Off.*





Activation Character

This sets the character used to trigger scanning when using Character Activation Mode. On the [ASCII Conversion Chart \(Code Page 1252\)](#) on page 192, find the hex value that represents the character you want to use to trigger scanning. Scan the bar code below, then use the [Programming Chart](#) on page 202 to read the alphanumeric combination that represents that ASCII character. Scan [Save](#) to finish.



End Character Activation After Good Read

After a bar code is successfully detected and read from the scanner, the laser can be programmed either to remain on and scanning, or to turn off. When **End Character Activation After Good Read** is enabled, the laser turns off and stops scanning after a good read. If you scan **Do Not End Character Activation After Good Read**, the laser remains on after a good read. *Default = End Character Activation After Good Read.*



Character Activation Laser Timeout

You can set a timeout for the length of time the laser remains on and attempting to decode bar codes when using Character Activation Mode. Set the length (in milliseconds) for a timeout by scanning the bar code below, then setting the timeout (from 1-65535 milliseconds) by scanning digits from the [Programming Chart](#) on page 202, then [Save](#). *Default = 5000 ms.*



Character Deactivation Mode

If you have sent a character from the host to trigger the scanner to begin scanning, you can also send a deactivation character to stop scanning. Scan the **On** bar code below to use character deactivation, then use **Deactivation Character** (following) to select the character you will send from the host to terminate scanning. *Default = Off.*



Deactivation Character

This sets the character used to terminate scanning when using Character Deactivation Mode. On the [ASCII Conversion Chart \(Code Page 1252\)](#) on page 192, find the hex value that represents the character you want to use to terminate scanning. Scan the bar code below, then use the [Programming Chart](#) on page 202 to read the alphanumeric combination that represents that ASCII character. Scan [Save](#) to finish.



Reread Delay

This sets the time period before the scanner can read the *same* bar code a second time. Setting a reread delay protects against accidental rereads of the same bar code. Longer delays are effective in minimizing accidental rereads. Use shorter delays in applications where repetitive bar code scanning is required. *Default = Medium.*





DLYRRD1000.
Long (1000 ms)



DLYRRD2000.
Extra Long (2000 ms)

User-Specified Reread Delay

If you want to set your own length for the reread delay, scan the bar code below, then set the delay (from 0-30,000 milliseconds) by scanning digits from the [Programming Chart](#) on page 202, then [Save](#).



DLYRRD.
User-Specified Reread Delay

Output Sequence Overview

Output Sequence Editor

This programming selection allows you to program the scanner to output data (when scanning more than one symbol) in whatever order your application requires, regardless of the order in which the bar codes are scanned. Reading the **Default Sequence** symbol programs the scanner to the Universal values, shown below. These are the defaults. Be certain you want to delete or clear all formats before you read the **Default Sequence** symbol.

Note: To make Output Sequence Editor selections, you'll need to know the code I.D., code length, and character match(es) your application requires. Use the Alphanumeric symbols from the [Programming Chart](#), beginning on page 202. You must hold the trigger while reading each bar code in the sequence.

To Add an Output Sequence

1. Scan the *Enter Sequence* symbol (see [Require Output Sequence](#), page 59).
2. **Code I.D.**
On the [Symbology Charts](#) on page 189, find the symbology to which you want to apply the output sequence format. Locate the Hex value for that symbology and scan the 2 digit hex value from the [Programming Chart](#) on page 202.
3. **Length**
Specify what length (up to 9999 characters) of data output will be acceptable

for this symbology. Scan the 4 digit data length from the [Programming Chart](#) on page 202. (Note: 50 characters is entered as 0050. 9999 is a universal number, indicating all lengths.) When calculating the length, you must count any programmed prefixes, suffixes, or formatted characters as part of the length (unless using 9999).

4. **Character Match Sequences**

On the [ASCII Conversion Chart \(Code Page 1252\)](#) on page 192, find the Hex value that represents the character(s) you want to match. Use the [Programming Chart](#) on page 202 to read the alphanumeric combination that represents the ASCII characters. (99 is the Universal number, indicating all characters.)

5. **End Output Sequence Editor**

Scan **FF** to enter an Output Sequence for an additional symbology, or [Save](#) to save your entries.

Other Programming Selections

Discard exits without saving any Output Sequence changes.

Output Sequence Example

In this example, you are scanning Code 93, Code 128, and Code 39 bar codes, but you want the scanner to output Code 39 1st, Code 128 2nd, and Code 93 3rd, as shown below.

Note: *Code 93 must be enabled to use this example.*



A - Code 39



B - Code 128



C - Code 93

You would set up the sequence editor with the following command line:

SEQBLK62999941FF6A999942FF69999943FF

The breakdown of the command line is shown below:

SEQBLK sequence editor start command

62 code identifier for **Code 39**

9999code length that must match for Code 39, 9999 = all lengths

41start character match for Code 39, 41h = "A"

FFtermination string for first code

6Acode identifier for **Code 128**

9999code length that must match for Code 128, 9999 = all lengths

42start character match for Code 128, 42h = "B"

FFtermination string for second code

69code identifier for **Code 93**

9999code length that must match for Code 93, 9999 = all lengths

43start character match for Code 93, 43h = "C"

FFtermination string for third code

To program the previous example using specific lengths, you would have to count any programmed prefixes, suffixes, or formatted characters as part of the length. If you use the example on [page 56](#), but assume a <CR> suffix and specific code lengths, you would use the following command line:

SEQBLK62001241FF6A001342FF69001243FF

The breakdown of the command line is shown below:

SEQBLKsequence editor start command

62code identifier for **Code 39**

0012A - Code 39 sample length (11) plus CR suffix (1) = 12

41start character match for Code 39, 41h = "A"

FFtermination string for first code

6Acode identifier for **Code 128**

0013B - Code 128 sample length (12) plus CR suffix (1) = 13

42start character match for Code 128, 42h = "B"

FFtermination string for second code

69code identifier for **Code 93**

0012C - Code 93 sample length (11) plus CR suffix (1) = 12

43start character match for Code 93, 43h = "C"

FFtermination string for third code

Output Sequence Editor



Sequence Timeout

You may wish to set the maximum time between bar code scans in an output sequence. If that maximum time is not met, the output sequence operation is terminated. Set the length (in milliseconds) for a timeout by scanning the bar code below, then setting the timeout (from 1-65535 milliseconds) by scanning digits from the [Programming Chart](#) on page 202, then [Save](#). *Default = 5000 msec.*



Sequence Match Beeper

By default, the scanner beeps when a sequence match is found. If you want the scanner to remain silent, scan the **Sequence Match Beeper Off** bar code below. *Default = Sequence Match Beeper On.*



Partial Sequence

If an output sequence operation is terminated before all your output sequence criteria are met, the bar code data acquired to that point is a "partial sequence."

Scan **Discard Partial Sequence** to discard partial sequences when the output sequence operation is terminated before completion.

Scan **Transmit Partial Sequence** to transmit partial sequences. (Any fields in the sequence where no data match occurred will be skipped in the output.) If you have programmed a [Sequence Timeout](#) (page 58) and the timeout is reached, the partial sequence is transmitted. *Default = Discard Partial Sequence.*



SEQTTS1.

Transmit Partial Sequence



SEQTTS0.

*** Discard Partial Sequence**

Require Output Sequence

When an output sequence is **Required**, all output data must conform to an edited sequence or the scanner will not transmit the output data to the host device. When it's **On/Not Required**, the scanner will attempt to get the output data to conform to an edited sequence but, if it cannot, the scanner transmits all output data to the host device as is.

When the output sequence is **Off**, the bar code data is output to the host as the scanner decodes it. *Default = Off.*



SEQ_EN2.

Required



SEQ_EN1.

On/Not Required



SEQ_EN0.

***Off**

No Read

With No Read turned **On**, the scanner notifies you if a code cannot be read. If using an EZConfig-Scanning Tool Scan Data Window (see page [148](#)), an “NR” appears when a code cannot be read. If No Read is turned **Off**, the “NR” will not appear. *Default = Off.*



SHWNRD1.

On



SHWNRD0.


*** Off**

If you want a different notation than “NR,” for example, “Error,” or “Bad Code,” you can edit the output message (see [Data Format](#) beginning on page 5-69). The hex code for the No Read symbol is **9C**.

Prefix/Suffix Overview

When a bar code is scanned, additional information is sent to the host computer along with the bar code data. This group of bar code data and additional, user-defined data is called a “message string.” The selections in this section are used to build the user-defined data into the message string.

Prefix and Suffix characters are data characters that can be sent before and after scanned data. You can specify if they should be sent with all symbologies, or only with specific symbologies. The following illustration shows the breakdown of a message string:

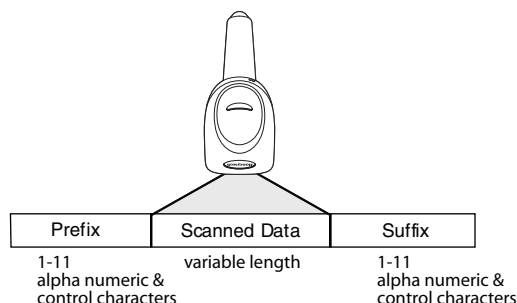

Points to Keep In Mind

- It is not necessary to build a message string. The selections in this chapter are only used if you wish to alter the default settings. *Default prefix = None. Default suffix is dependent on interface.*
- A prefix or suffix may be added or cleared from one symbology or all symbologies.
- You can add any prefix or suffix from the [ASCII Conversion Chart \(Code Page 1252\)](#), beginning on page 192, plus Code I.D. and AIM I.D.
- You can string together several entries for several symbologies at one time.
- Enter prefixes and suffixes in the order in which you want them to appear on the output.

- When setting up for specific symbologies (as opposed to all symbologies), the specific symbology ID value counts as an added prefix or suffix character.
- The maximum size of a prefix or suffix configuration is 32 characters, which includes header information.

Add a Prefix or Suffix:

- Step 1. Scan the **Add Prefix** or **Add Suffix** symbol ([page 63](#)).
- Step 2. Determine the 2 digit hex value from the [Symbology Charts](#) (beginning on page A-189) for the symbology to which you want to apply the prefix or suffix. For example, for Code 128, Code ID is “j” and Hex ID is “6A”.
- Step 3. Scan the 2 hex digits from the [Programming Chart](#), beginning on page 202, or scan **9, 9** for all symbologies.

To add the Code I.D., scan **5, C, 8, 0**.

To add the AIM I.D., scan **5, C, 8, 1**.

To add the serial number, scan **5, C, 8, 8**.

To add a backslash (\), scan **5, C, 5, C**.

Note: When adding a backslash (\), you must scan 5C twice – once to create the leading backslash and then to create the backslash itself.

- Step 4. Repeat Steps 2 and 3 for every prefix or suffix character.
 - Step 5. Scan **Save** to exit and save, or scan **Discard** to exit without saving.
- Repeat the steps above to add a prefix or suffix for another symbology.

Example: Add a Tab Suffix to All Symbologies

- Step 1. Scan **Add Suffix**.
- Step 2. Scan **9, 9** from the [Programming Chart](#), beginning on page 202 to apply this suffix to all symbologies.
- Step 3. Scan **0, 9** from the [Programming Chart](#), beginning on page 202. This corresponds with the hex value for a horizontal tab, shown in the [ASCII Conversion Chart \(Code Page 1252\)](#), beginning on page 192.
- Step 4. Scan **Save**, or scan **Discard** to exit without saving.

Clear One or All Prefixes or Suffixes

You can clear a single prefix or suffix, or clear all prefixes/suffixes for a symbology. If you have been entering prefixes and suffixes for single symbologies, you can use **Clear One Prefix (Suffix)** to delete a specific character from a symbology. When you **Clear All Prefixes (Suffixes)**, all the prefixes or suffixes for a symbology are deleted.

- Step 1. Scan the **Clear One Prefix** or **Clear One Suffix** symbol.
- Step 2. Determine the 2 digit Hex value from the Symbology Chart (included in the [Symbology Charts](#), beginning on page 189) for the symbology from which you want to clear the prefix or suffix.
- Step 3. Scan the 2 digit hex value from the [Programming Chart](#), beginning on page 202 or scan **9, 9** for all symbologies.

Your change is automatically saved.

To Add a Carriage Return Suffix to All Symbologies

Scan the following bar code if you wish to add a carriage return suffix to all symbologies at once. This action first clears all current suffixes, then programs a carriage return suffix for all symbologies.



VSUFCR.
**Add CR Suffix
All Symbologies**

Prefix Selections



PREBK2.
Add Prefix



PRECA2.
Clear All Prefixes



PRECL2.
Clear One Prefix

Suffix Selections



SUFBK2.
Add Suffix



SUFCL2.
Clear One Suffix



Transmit Alternate Extended ASCII Characters

You may need to emulate special keyboard functions, such as up or down arrows, Alt/Make or Alt/Break commands, that are not supported in the Extended ASCII Character table. Refer to [Alternate Extended ASCII Characters](#) (page 64) for a range of keyboard function keys and corresponding decimal and hex characters. If you scan the **Transmit Alternate Extended ASCII** code, any hex entries in a prefix or suffix will result in the corresponding Keyboard Function output.

Example: **Transmit Alternate Extended ASCII** is enabled, and you scan **Add Suffix**, then scan **9 9 8 9**. All symbologies (99) would have a suffix of a Page Down (hex 89) added to them.

When **Transmit Normal Extended ASCII** is selected, the normal extended ASCII character is transmitted [ASCII Conversion Chart \(Code Page 1252\)](#) on page 192.

Example: **Transmit Normal Extended ASCII** is enabled, and you scan **Add Suffix**, then scan **9 9 8 9**. All symbologies (99) would have a suffix of a % character added to them.

Default = Transmit Alternate Extended ASCII.



Alternate Extended ASCII Characters					
DEC	HEX	Keyboard Function	DEC	HEX	Keyboard Function
128	80	up arrow ↑	152	98	F9
129	81	down arrow ↓	153	99	F10
130	82	right arrow →	154	9A	F11
131	83	left arrow ←	155	9B	F12
132	84	Insert	156	9C	Numeric Keypad +
133	85	Delete	157	9D	Numeric Keypad -
134	86	Home	158	9E	Numeric Keypad *

Alternate Extended ASCII Characters (Continued)					
DEC	HEX	Keyboard Function	DEC	HEX	Keyboard Function
135	87	End	159	9F	Caps Lock
136	88	Page Up	160	A0	Num Lock
137	89	Page Down	161	A1	Left Alt
138	8A	Right ALT	162	A2	Left Ctrl
139	8B	Right CTRL	163	A3	Left Shift
140	8C	Reserved	164	A4	Right Shift
141	8D	Reserved	165	A5	Print Screen
142	8E	Numeric Keypad Enter	166	A6	Tab
143	8F	Numeric Keypad /	167	A7	Shift Tab
144	90	F1	168	A8	Enter
145	91	F2	169	A9	Esc
146	92	F3	170	AA	Alt Make
147	93	F4	171	AB	Alt Break
148	94	F5	172	AC	Control Make
149	95	F6	173	AD	Control Break
150	96	F7	174	AE	Alt Sequence with 1 Character
151	97	F8	175	AF	Ctrl Sequence with 1 Character

Function Code Transmit

By default, all ASCII control characters are transmitted with bar code data. These non-printable characters are translated into predefined key strokes, or CTRL+X functions (see [ASCII Conversion Chart \(Code Page 1252\)](#) on page 192). If these key strokes interfere with your host's software application, scan **Disable** to keep these ASCII control characters from being transmitted. *Default = Enable.*



RMVFNC0.
* Enable



RMVFNC1.
Disable

Communication Check Character

To enhance security, you can specify the transmission type of a check character; either LRC where the calculation starts on the first transmitted character, LRC where the calculation starts on the second transmitted character, or CRC.

Note: *This option adds a check character to the bar code data for all symbologies. If you need to enable or disable check characters for individual symbologies, see [Symbologies](#) beginning on page 87.*

Scan the bar code below to set the communication check character type. *Default = None.*




Intercharacter, Interfunction, and Intermessage Delays

Some terminals drop information (characters) if data comes through too quickly. Intercharacter, interfunction, and intermessage delays slow the transmission of data, increasing data integrity.

Intercharacter Delay

An intercharacter delay of up to 5000 milliseconds (in 5ms increments) may be placed between the transmission of each character of scanned data. Scan the **Intercharacter Delay** bar code below, then scan the number of 5ms delays, and the [Save](#) bar code using the [Programming Chart](#) on page 202.

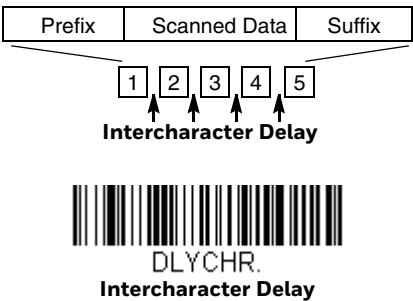

To remove this delay, scan the **Intercharacter Delay** bar code, then set the number of delays to **0**. Scan the [Save](#) bar code using the [Programming Chart](#) on page 202.

Note: *Intercharacter delays are not supported in USB serial emulation.*

User Specified Intercharacter Delay

An intercharacter delay of up to 5000 milliseconds (in 5ms increments) may be placed after the transmission of a particular character of scanned data. Scan the **Delay Length** bar code below, then scan the number of 5ms delays, and the [Save](#) bar code using the [Programming Chart](#) on page 202.


Next, scan the **Character to Trigger Delay** bar code, then the 2-digit hex value for a printable character to trigger the delay (see [Lower ASCII Reference Table](#) on page 193).



To remove this delay, scan the **Delay Length** bar code, and set the number of delays to **0**. Scan the [Save](#) bar code using the [Programming Chart](#) on page 202.

Interfunction Delay


An interfunction delay of up to 5000 milliseconds (in 5ms increments) may be placed between the transmission of each segment of the message string. Scan the **Interfunction Delay** bar code below, then scan the number of 5ms delays, and the [Save](#) bar code using the [Programming Chart](#) on page 202.

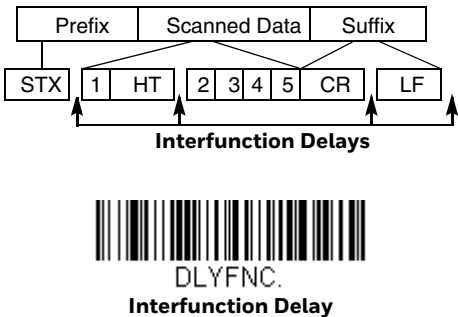

To remove this delay, scan the **Interfunction Delay** bar code, then set the number of delays to **0**. Scan the [Save](#) bar code using the [Programming Chart](#) on page 202.

Intermessage Delay

An intermessage delay of up to 5000 milliseconds (in 5ms increments) may be placed between each scan transmission. Scan the **Intermessage Delay** bar code below, then scan the number of 5ms delays, and the [Save](#) bar code using the [Programming Chart](#) on page 202.

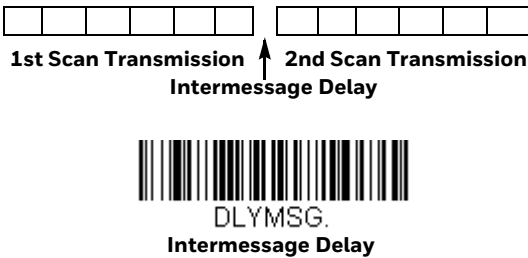

To remove this delay, scan the **Intermessage Delay** bar code, then set the number of delays to **0**. Scan the [Save](#) bar code using the [Programming Chart](#) on page 202.

Data Format Editor Introduction

You may use the Data Format Editor to change the scanner's output. For example, you can use the Data Format Editor to insert characters at certain points in bar code data as it is scanned. The selections in the following pages are used only if you wish to alter the output. *Default Data Format setting = None.*

Normally, when you scan a bar code, it gets outputted automatically; however when you create a format, you must use a "send" command (see [Send Commands](#) on page 72) within the format program to output data.

Multiple formats may be programmed into the scanner. They are stacked in the order in which they are entered. However, the following list presents the order in which formats are applied:

1. Specific Terminal ID, Actual Code ID, Actual Length
2. Specific Terminal ID, Actual Code ID, Universal Length
3. Specific Terminal ID, Universal Code ID, Actual Length
4. Specific Terminal ID, Universal Code ID, Universal Length
5. Universal Terminal ID, Actual Code ID, Actual Length
6. Universal Terminal ID, Actual Code ID, Universal Length
7. Universal Terminal ID, Universal Code ID, Actual Length
8. Universal Terminal ID, Universal Code ID, Universal Length

The maximum size of a data format configuration is 2000 bytes, which includes header information.

If a bar code is read that fails the first data format, the next data format, if there is one, will be used on the bar code data. If there is no other data format, the raw data is output.

If you have changed data format settings, and wish to clear all formats and return to the factory defaults, scan the **Default Data Format** code below.



To Add a Data Format

- Step 1. Scan the **Enter Data Format** symbol ([page 71](#)).
- Step 2. **Select Primary/Alternate Format**
Determine if this will be your primary data format, or one of 3 alternate formats. This allows you to save a total of 4 different data formats. To program your primary format, scan **0** from the [Programming Chart](#), beginning on page 202. If you are programming an alternate format, scan **1**, **2**, or **3**, depending on which alternate format you are programming. (See "Primary/Alternate Data Formats" on page 84 for further information.)
- Step 3. **Terminal Type**
Refer to [Terminal ID Table](#) (page 72) and locate the Terminal ID number for your PC. Scan three numeric bar codes from the [Programming Chart](#), beginning on page 202, to program the scanner for your terminal ID (you must enter 3 digits). For example, scan **003** for an AT wedge.

Note: **099** indicates all terminal types.

- Step 4. **Code I.D.**
In the [Symbology Charts](#), beginning on page 189, find the symbology to which you want to apply the data format. Locate the Hex value for that symbology and scan the 2 digit hex value from the [Programming Chart](#), beginning on page 202.

If you are creating a data format for Batch Mode Quantity, use **35** for the Code I.D.

Note: **99** indicates all symbologies.

- Step 5. **Length**
Specify what length (up to 9999 characters) of data will be acceptable for this symbology. Scan the four digit data length from the [Programming Chart](#), beginning on page 202. For example, 50 characters is entered as **0050**.

Note: **9999** indicates all lengths.

- Step 6. **Editor Commands**
Refer to [Data Format Editor Commands](#) (page 72). Scan the symbols that represent the command you want to enter.

Step 7. Scan **Save** to save your data format, or **Discard** to exit without saving your changes.



Other Programming Selections

- **Clear One Data Format**
This deletes one data format for one symbology. If you are clearing the primary format, scan **0** from the [Programming Chart](#), beginning on page 202. If you are clearing an alternate format, scan **1, 2, or 3**, depending on the format you are clearing. Scan the Terminal Type and Code I.D. (see [Symbology Charts](#) on page 189), and the bar code data length for the specific data format that you want to delete. All other formats remain unaffected.
- **Clear all Data Formats**
This clears all data formats.
- **Save**
Exit and save your data format changes.
- **Discard**
Exit without saving any data format changes.



Terminal ID Table

Terminal	Model(s)	Terminal ID
IBM	PC/AT and compatibles	003
	PS2 Keyboard	002
	USB SurePOS Handheld Scanner	128
	USB SurePOS Tabletop Scanner	129
RS232	True	000
	TTL	000
RS485		051
USB	Serial	130
	PC Keyboard	124
	Mac Keyboard	125
	Japanese Keyboard (PC)	134
	HID POS	131

Data Format Editor Commands

When working with the Data Format Editor, a virtual cursor is moved along your input data string. The following commands are used to both move this cursor to different positions, and to select, replace, and insert data into the final output.

Send Commands

Send all characters

- F1** Include in the output message all of the characters from the input message, starting from current cursor position, followed by an insert character. *Syntax* = *F1xx* where *xx* stands for the insert character's hex value for its ASCII code. Refer to the [ASCII Conversion Chart \(Code Page 1252\)](#), beginning on page 192 for decimal, hex and character codes.

Send a number of characters

- F2** Include in the output message a number of characters followed by an insert character. Start from the current cursor position and continue for "nn" characters or through the last character in the input message, followed by character "xx." *Syntax* = *F2nnxx* where *nn* stands for the numeric value (00-99) for the number of characters, and *xx* stands for the insert character's hex value for its ASCII code. Refer to the [ASCII Conversion Chart \(Code Page 1252\)](#), beginning on page 192 for decimal, hex and character codes.

F2 Example: Send a number of characters



Send the first 10 characters from the bar code above, followed by a carriage return.

Command string: F2100D

F2 is the “Send a number of characters” command

10 is the number of characters to send

0D is the hex value for a CR

The data is output as: **1234567890**

F2 and F1 Example: Split characters into 2 lines

Send the first 10 characters from the bar code above, followed by a carriage return, followed by the rest of the characters.

Command string: **F2100DF10D**

F2 is the “Send a number of characters” command

10 is the number of characters to send for the first line

0D is the hex value for a CR

F1 is the “Send all characters” command

0D is the hex value for a CR

The data is output as:

1234567890

ABCDEFGHIJ

<CR>

Send all characters up to a particular character

F3 Include in the output message all characters from the input message, starting with the character at the current cursor position and continuing to, but not including, the search character “ss,” followed by an insert character. The cursor is moved forward to the “ss” character. Syntax = F3ssxx where ss stands for the search character’s hex value for its ASCII code, and xx stands for the insert character’s hex value for its ASCII code.

Refer to the [ASCII Conversion Chart \(Code Page 1252\)](#), beginning on page 192 for decimal, hex and character codes.

F3 Example: Send all characters up to a particular character



Using the bar code above, send all characters up to but not including “D,” followed by a carriage return.

Command string: **F3440D**

F3 is the “Send all characters up to a particular character” command

44 is the hex value for a 'D'

0D is the hex value for a CR

The data is output as:

1234567890ABC
<CR>

Send all but the last characters

E9 Include in the output message all but the last “nn” characters, starting from the current cursor position. The cursor is moved forward to one position past the last input message character included. *Syntax = E9nn* where nn stands for the numeric value (00-99) for the number of characters that will not be sent at the end of the message.

Insert a character multiple times

F4 Send “xx” character “nn” times in the output message, leaving the cursor in the current position. *Syntax = F4xxnn* where xx stands for the insert character’s hex value for its ASCII code, and nn is the numeric value (00-99) for the number of times it should be sent. Refer to the [ASCII Conversion Chart \(Code Page 1252\)](#), beginning on page 192 for decimal, hex and character codes.

E9 and F4 Example: Send all but the last characters, followed by 2 tabs



Send all characters except for the last 8 from the bar code above, followed by 2 tabs.

Command string: **E908F40902**

E9 is the “Send all but the last characters” command

08 is the number of characters at the end to ignore

F4 is the “Insert a character multiple times” command

09 is the hex value for a horizontal tab

02 is the number of times the tab character is sent

The data is output as: **1234567890AB <tab><tab>**

Insert symbology name

B3 Insert the name of the bar code’s symbology in the output message, without moving the cursor. Only symbologies with a Honeywell ID are included (see [Symbology Charts](#) on page 189). Refer to the [ASCII Conversion Chart \(Code Page 1252\)](#), beginning on page 192 for decimal, hex and character codes.

Insert bar code length

B4 Insert the bar code's length in the output message, without moving the cursor. The length is expressed as a numeric string and does not include leading zeros.

B3 and B4 Example: Insert the symbology name and length



Send the symbology name and length before the bar code data from the bar code above. Break up these insertions with spaces. End with a carriage return.

Command string: **B3F42001B4F42001F10D**

B3 is the "Insert symbology name" command

F4 is the "Insert a character multiple times" command

20 is the hex value for a space

01 is the number of times the space character is sent

B4 is the "Insert bar code length" command

F4 is the "Insert a character multiple times" command

20 is the hex value for a space

01 is the number of times the space character is sent

F1 is the "Send all characters" command

0D is the hex value for a CR

The data is output as:

**Code128 20 1234567890ABCDEFGHIJ
<CR>**

Move Commands

Move the cursor forward a number of characters

F5 Move the cursor ahead "nn" characters from current cursor position.
Syntax = F5nn where nn is the numeric value (00-99) for the number of characters the cursor should be moved ahead.

F5 Example: Move the cursor forward and send the data



Move the cursor forward 3 characters, then send the rest of the bar code data from the bar code above. End with a carriage return.

Command string: **F503F10D**

F5 is the “Move the cursor forward a number of characters” command

03 is the number of characters to move the cursor

F1 is the “Send all characters” command

0D is the hex value for a CR

The data is output as:

4567890ABCDEFGHJ

<CR>

Move the cursor backward a number of characters

F6 Move the cursor back “nn” characters from current cursor position.

Syntax = *F6nn* where nn is the numeric value (00–99) for the number of characters the cursor should be moved back.

Move the cursor to the beginning

F7 Move the cursor to the first character in the input message. Syntax = *F7*.

FE and F7 Example: Manipulate bar codes that begin with a 1



Search for bar codes that begin with a 1. If a bar code matches, move the cursor back to the beginning of the data and send 6 characters followed by a carriage return. Using the bar code above:

Command string: **FE31F7F2060D**

FE is the “Compare characters” command

31 is the hex value for 1

F7 is the “Move the cursor to the beginning” command

F2 is the “Send a number of characters” command

06 is the number of characters to send

0D is the hex value for a CR

The data is output as:

123456

<CR>

Move the cursor to the end

EA Move the cursor to the last character in the input message. Syntax = *EA*.

Search Commands

Search forward for a character

F8 Search the input message forward for “xx” character from the current cursor position, leaving the cursor pointing to the “xx” character. *Syntax = F8xx* where xx stands for the search character’s hex value for its ASCII code. Refer to the [ASCII Conversion Chart \(Code Page 1252\)](#), beginning on page 192 for decimal, hex and character codes.

F8 Example: Send bar code data that starts after a particular character



Search for the letter “D” in bar codes and send all the data that follows, including the “D.” Using the bar code above:

Command string: **F844F10D**

F8 is the “Search forward for a character” command

44 is the hex value for “D”

F1 is the “Send all characters” command

0D is the hex value for a CR

The data is output as:

DEFGHIJ
<CR>

Search backward for a character

F9 Search the input message backward for “xx” character from the current cursor position, leaving the cursor pointing to the “xx” character. *Syntax = F9xx* where xx stands for the search character’s hex value for its ASCII code. Refer to the [ASCII Conversion Chart \(Code Page 1252\)](#), beginning on page 192 for decimal, hex and character codes.

Search forward for a string

B0 Search forward for “s” string from the current cursor position, leaving cursor pointing to “s” string. *Syntax = B0nnnnS* where nnnn is the string length (up to 9999), and S consists of the ASCII hex value of each character in the match string. For example, B0000454657374 will search forward for the first occurrence of the 4 character string “Test.” Refer to the [ASCII Conversion Chart \(Code Page 1252\)](#), beginning on page 192 for decimal, hex and character codes.

B0 Example: Send bar code data that starts after a string of characters



Search for the letters “FGH” in bar codes and send all the data that follows, including “FGH.” Using the bar code above:

Command string: **B00003464748F10D**

B0 is the “Search forward for a string” command

0003 is the string length (3 characters)

46 is the hex value for “F”

47 is the hex value for “G”

48 is the hex value for “H”

F1 is the “Send all characters” command

0D is the hex value for a CR

The data is output as:

FGHIJ

<CR>

Search backward for a string

- B1** Search backward for “s” string from the current cursor position, leaving cursor pointing to “s” string. Syntax = B1nnnnS where nnnn is the string length (up to 9999), and S consists of the ASCII hex value of each character in the match string. For example, B1000454657374 will search backward for the first occurrence of the 4 character string “Test.”

Refer to the [ASCII Conversion Chart \(Code Page 1252\)](#), beginning on page 192 for decimal, hex and character codes.

Search forward for a non-matching character

- E6** Search the input message forward for the first non-“xx” character from the current cursor position, leaving the cursor pointing to the non-“xx” character. Syntax = E6xx where xx stands for the search character’s hex value for its ASCII code. Refer to the [ASCII Conversion Chart \(Code Page 1252\)](#), beginning on page 192 for decimal, hex and character codes.

E6 Example: Remove zeros at the beginning of bar code data



This example shows a bar code that has been zero filled. You may want to ignore the zeros and send all the data that follows. E6 searches forward for the first character that is not zero, then sends all the data after, followed by a carriage return. Using the bar code above:

Command string: **E630F10D**

E6 is the “Search forward for a non-matching character” command

30 is the hex value for 0

F1 is the “Send all characters” command

0D is the hex value for a CR

The data is output as:

37692

<CR>

Search backward for a non-matching character

- E7** Search the input message backward for the first non-“xx” character from the current cursor position, leaving the cursor pointing to the non-“xx” character. Syntax = *E7xx* where xx stands for the search character’s hex value for its ASCII code. Refer to the [ASCII Conversion Chart \(Code Page 1252\)](#), beginning on page 192 for decimal, hex and character codes.

Miscellaneous Commands

Suppress characters

- FB** Suppress all occurrences of up to 15 different characters, starting at the current cursor position, as the cursor is advanced by other commands. When the FC command is encountered, the suppress function is terminated. The cursor is not moved by the FB command. Syntax = *FBnnxxyy..zz* where nn is a count of the number of suppressed characters in the list, and xxyy..zz is the list of characters to be suppressed.

FB Example: Remove spaces in bar code data



This example shows a bar code that has spaces in the data. You may want to remove the spaces before sending the data. Using the bar code above:

Command string: **FB0120F10D**

FB is the “Suppress characters” command

01 is the number of character types to be suppressed

20 is the hex value for a space

F1 is the “Send all characters” command

0D is the hex value for a CR

- The data is output as:
34567890
<CR>

Stop suppressing characters

FC Disables suppress filter and clear all suppressed characters. *Syntax = FC.*

Replace characters

E4 Replaces up to 15 characters in the output message, without moving the cursor. Replacement continues until the E5 command is encountered. *Syntax = E4nnxx₁xx₂yy₁yy₂...zz₁zz₂* where nn is the total count of the number of characters in the list (characters to be replaced plus replacement characters); xx₁ defines characters to be replaced and xx₂ defines replacement characters, continuing through zz₁ and zz₂.

E4 Example: Replace zeros with CRs in bar code data



If the bar code has characters that the host application does not want included, you can use the E4 command to replace those characters with something else. In this example, you will replace the zeros in the bar code above with carriage returns.

Command string: **E402300DF10D**

E4 is the “Replace characters” command

02 is the total count of characters to be replaced, plus the replacement characters (0 is replaced by CR, so total characters = 2)

30 is the hex value for 0

0D is the hex value for a CR (the character that will replace the 0)

F1 is the “Send all characters” command

0D is the hex value for a CR

The data is output as:

1234
5678
ABC
<CR>

Stop replacing characters

E5 Terminates character replacement. *Syntax = E5.*

Compare characters

FE Compare the character in the current cursor position to the character “xx.” If characters are equal, move the cursor forward one position. *Syntax = FExx* where xx stands for the comparison character’s hex value for its ASCII code. Refer to the [ASCII Conversion Chart \(Code Page 1252\)](#), beginning on page 192 for decimal, hex and character codes.

Compare string

B2 Compare the string in the input message to the string “s.” If the strings are equal, move the cursor forward past the end of the string. *Syntax = B2nnnnS* where nnnn is the string length (up to 9999), and S consists of the ASCII hex value of each character in the match string. For example, B2000454657374 will compare the string at the current cursor position with the 4 character string “Test.” Refer to the [ASCII Conversion Chart \(Code Page 1252\)](#), beginning on page 192 for decimal, hex and character codes.

Check for a number

EC Check to make sure there is an ASCII number at the current cursor position. The format is aborted if the character is not numeric.

EC Example: Only output the data if the bar code begins with a number

If you want only data from bar codes that begin with a number, you can use EC to check for the number.

Command string: **ECF10D**

EC is the “Check for a number” command

F1 is the “Send all characters” command

0D is the hex value for a CR

If this bar code is read,  the next data format, if there is one, will be used on the data. If there is no other format, the format fails and the raw data is output as **AB1234**.

If this bar code is read:  the data is output as:

1234AB
<CR>

Check for non-numeric character

ED Check to make sure there is a non-numeric ASCII character at the current cursor position. The format is aborted if the character is numeric.

ED Example: Only output the data if the bar code begins with a letter

If you want only data from bar codes that begin with a letter, you can use ED to check for the letter.

Command string: **EDF10D**

ED is the “Check for a non-numeric character” command

F1 is the “Send all characters” command

0D is the hex value for a CR

If this bar code is read,  the next data format, if there is one, will be used on this data. If there is no other format, the format fails and the raw data is output as **1234AB**.

If this bar code is read:  the data is output as:

AB1234
<CR>

Insert a delay

EF Inserts a delay of up to 49,995 milliseconds (in multiples of 5), starting from the current cursor position. Syntax = EFnnnn where nnnn stands for the delay in 5ms increments, up to 9999. This command can only be used with keyboard emulation.

Data Formatter

When Data Formatter is turned **Off**, the bar code data is output to the host as read, including prefixes and suffixes.



You may wish to require the data to conform to a data format you have created and saved. The following settings can be applied to your data format:

- **Data Formatter On, Not Required, Keep Prefix/Suffix**
Scanned data is modified according to your data format, and prefixes and suffixes are transmitted.

- **Data Formatter On, Not Required, Drop Prefix/Suffix**
Scanned data is modified according to your data format. If a data format is found for a particular symbol, those prefixes and suffixes are not transmitted. If a data format is *not* found for that symbol, the prefixes and suffixes *are* transmitted.
- **Data Format Required, Keep Prefix/Suffix**
Scanned data is modified according to your data format, and prefixes and suffixes are transmitted. Any data that does not match your data format requirements generates an error tone and the data in that bar code is not transmitted. If you wish to process this type of bar code without generating an error tone, see [Data Format Non-Match Error Tone](#).
- **Data Format Required, Drop Prefix/Suffix**
Scanned data is modified according to your data format. If a data format is found for a particular symbol, those prefixes and suffixes are not transmitted. Any data that does not match your data format requirements generates an error tone. If you wish to process this type of bar code without generating an error tone, see [Data Format Non-Match Error Tone](#).

Choose one of the following options. *Default = Data Formatter On, Not Required, Keep Prefix/Suffix.*



DFM_EN1.
* Data Formatter On,
Not Required,
Keep Prefix/Suffix



DFM_EN3.
Data Formatter On,
Not Required,
Drop Prefix/Suffix



DFM_EN2.
Data Format Required,
Keep Prefix/Suffix



DFM_EN4.
Data Format Required,
Drop Prefix/Suffix

Data Format Non-Match Error Tone

When a bar code is encountered that doesn't match your required data format, the scanner normally generates an error tone. However, you may want to continue scanning bar codes without hearing the error tone. If you scan the **Data Format Non-Match Error Tone Off** bar code, data that doesn't conform to your data for-

mat is not transmitted, and no error tone will sound. If you wish to hear the error tone when a non-matching bar code is found, scan the **Data Format Non-Match Error Tone On** bar code. *Default = Data Format Non-Match Error Tone On.*



DFMDEC0.
*** Data Format Non-Match Error
Tone On**



DFMDEC1.
**Data Format Non-Match
Error Tone Off**

Primary/Alternate Data Formats

You can save up to four data formats, and switch between these formats. Your primary data format is saved under **0**. Your other three formats are saved under **1**, **2**, and **3**. To set your device to use one of these formats, scan one of the bar codes below.



ALTFNM0.
Primary Data Format



ALTFNM1.
Data Format 1



ALTFNM2.
Data Format 2



ALTFNM3.
Data Format 3

Single Scan Data Format Change

You can also switch between data formats for a single scan. The next bar code is scanned using an alternate data format, then reverts to the format you have selected above (either Primary, 1, 2, or 3).

For example, you may have set your device to the data format you saved as Data Format 3. You can switch to Data Format 1 for a single trigger pull by scanning the **Single Scan-Data Format 1** bar code below. The next bar code that is scanned uses Data Format 1, then reverts back to Data Format 3.



VSAF_0.

**Single Scan-Primary
Data Format**



VSAF_1.

Single Scan-Data Format 1



VSAF_2.

Single Scan-Data Format 2



VSAF_3.

Single Scan-Data Format 3

SYMBOLOLOGIES

This programming section contains the following menu selections. Refer to [Chapter 8](#) for settings and defaults.

- [All Symbolologies Off](#)
- [Airline Code 5](#) - see [Straight 2 of 5 IATA \(two-bar start/stop\)](#)
- [China Post \(Hong Kong 2 of 5\)](#)
- [Codabar](#)
- [Code 11](#)
- [Code 128](#)
- [Code 32 Pharmaceutical \(PARAF\)](#)
- [Code 39](#)
- [Code 93](#)
- [EAN/JAN-13](#)
- [EAN/JAN-8](#)
- [GS1 DataBar Expanded](#)
- [GS1 DataBar Limited](#)
- [GS1 DataBar Omnidirectional](#)
- [GS1 Emulation](#)
- [GS1-128](#)
- [Interleaved 2 of 5](#)
- [ISBT 128](#)
- [Matrix 2 of 5](#)
- [MSI](#)
- [NEC 2 of 5](#)
- [Plessey Code](#)
- [Postal Codes](#)
- [Straight 2 of 5 IATA \(two-bar start/stop\)](#)
- [Straight 2 of 5 Industrial \(three-bar start/stop\)](#)
- [Telepen](#)
- [Trioptic Code](#)
- [UPC-A](#)
- [UPC-A/EAN-13 with Extended Coupon Code](#)
- [UPC-E0](#)

All Symbolologies Off

For best scanner performance, we recommend you only enable the symbolologies that you need. Scan **All Symbolologies Off** to disable all symbolologies, then enable the symbolologies you need by scanning the **On** bar code for each symbolology.



Message Length Description

You are able to set the valid reading length of some of the bar code symbolologies. You may wish to set the same value for minimum and maximum length to force the scanner to read fixed length bar code data. This helps reduce the chances of a mis-read.

Example: Decode only those bar codes with a count of 9-20 characters.
Min. length = 09
Max. length = 20

Example: Decode only those bar codes with a count of 15 characters.
Min. length = 15
Max. length = 15

For a value other than the minimum and maximum message length defaults, scan the bar codes included in the explanation of the symbolology, then scan the digit value of the message length and [Save](#) bar codes on the [Programming Chart](#) on page 202. The minimum and maximum lengths and the defaults are included with the respective symbolologies.

Codabar

<Default All Codabar Settings>



Codabar On/Off





Codabar Start/Stop Characters

Start/Stop characters identify the leading and trailing ends of the bar code. You may either transmit, or not transmit Start/Stop characters.

Default = Don't Transmit.



Codabar Check Character

Codabar check characters are created using different “modulos.” You can program the scanner to read only Codabar bar codes with Modulo 16, Modulo 7 CD, or CLSI check characters. *Default = No Check Character.*

No Check Character indicates that the scanner reads and transmits bar code data with or without a check character.

When Check Character is set to **Validate and Transmit**, the scanner will only read Codabar bar codes printed with a check character, and will transmit this character at the end of the scanned data.

When Check Character is set to **Validate, but Don't Transmit**, the unit will only read Codabar bar codes printed *with* a check character, but will not transmit the check character with the scanned data.





Codabar Concatenation

Codabar supports symbol concatenation. When you enable concatenation, the scanner looks for a Codabar symbol having a “D” start character, adjacent to a symbol having a “D” stop character. In this case the two messages are concatenated into one with the “D” characters omitted.



Select **Require** to prevent the scanner from decoding a single “D” Codabar symbol without its companion. This selection has no effect on Codabar symbols without Stop/Start D characters.



Concatenation Timeout

When searching for bar codes during concatenation, you may wish to set a delay used to find the next bar code. Set the length (in milliseconds) for this delay by scanning the bar code below, then setting the timeout (from 1-65535 milliseconds) by scanning digits from the [Programming Chart](#), then scanning [Save](#).
Default = 750.



Codabar Redundancy

If you are encountering errors when reading Codabar bar codes, you may want to adjust the redundancy count. Redundancy adjusts the number of times a bar code is decoded before transmission, which may reduce the number of errors. Note that the higher the redundancy count, the longer it will take to decode the bar code. To adjust the redundancy, scan the **Codabar Redundancy** bar code below, then scan a redundancy count between 0 and 10 on the [Programming Chart](#) on page 202. Then scan the [Save](#) bar code. *Default = 0.*



Codabar Message Length

Scan the bar codes below to change the message length. Refer to [Message Length Description](#) (page 88) for additional information. Minimum and Maximum lengths = 1-80. Minimum Default = 3, Maximum Default = 80.



Code 39

< Default All Code 39 Settings >



C39DFT.

Code 39 On/Off



C39ENA1.

* On



C39ENA0.

Off

Code 39 Start/Stop Characters

Start/Stop characters identify the leading and trailing ends of the bar code. You may either transmit, or not transmit Start/Stop characters. *Default = Don't Transmit.*



C39SSX1.

Transmit



C39SSX0.

* Don't Transmit

Code 39 Check Character

No Check Character indicates that the scanner reads and transmits bar code data with or without a check character.

When Check Character is set to **Validate, but Don't Transmit**, the unit only reads Code 39 bar codes printed with a check character, but will not transmit the check character with the scanned data.

When Check Character is set to **Validate and Transmit**, the scanner only reads Code 39 bar codes printed with a check character, and will transmit this character at the end of the scanned data. *Default = No Check Character.*



C39CK20.

* No Check Character



C39CK21.

Validate, but Don't Transmit



C39CK22.

Validate and Transmit

Code 39 Redundancy

If you are encountering errors when reading Code 39 bar codes, you may want to adjust the redundancy count. Redundancy adjusts the number of times a bar code is decoded before transmission, which may reduce the number of errors. Note that the higher the redundancy count, the longer it will take to decode the bar code. To adjust the redundancy, scan the **Code 39 Redundancy** bar code below, then scan a redundancy count between 0 and 10 on the [Programming Chart](#) on page 202. Then scan the [Save](#) bar code. *Default = 0.*



C39VOT.

Code 39 Redundancy

Code 39 Message Length

Scan the bar codes below to change the message length. Refer to [Message Length Description](#) (page 88) for additional information. Minimum and Maximum lengths = 1-80. Minimum Default = 3, Maximum Default = 80.



C39MIN.

Minimum Message Length



C39MAX.

Maximum Message Length

Code 32 Pharmaceutical (PARAF)

Code 32 Pharmaceutical is a form of the Code 39 symbology used by Italian pharmacies. This symbology is also known as PARAF.



C39B321.
On



C39B320.
* Off

Full ASCII

If Full ASCII Code 39 decoding is enabled, certain character pairs within the bar code symbol will be interpreted as a single character. For example: \$V will be decoded as the ASCII character SYN, and /C will be decoded as the ASCII character #. Default = Off.

Full ASCII Table															
NUL %U	DLE \$P	SP SPACE	0 0	@ %V	P P	' %W	p +P								
SOH \$A	DC1 \$Q	! /A	1 1	A A	Q Q	a +A	q +Q								
STX \$B	DC2 \$R	" /B	2 2	B B	R R	b +B	r +R								
ETX \$C	DC3 \$S	# /C	3 3	C C	S S	c +C	s +S								
EOT \$D	DC4 \$T	\$ /D	4 4	D D	T T	d +D	t +T								
ENQ \$E	NAK \$U	% /E	5 5	E E	U U	e +E	u +U								
ACK \$F	SYN \$V	& /F	6 6	F F	V V	f +F	v +V								
BEL \$G	ETB \$W	' /G	7 7	G G	W W	g +G	w +W								
BS \$H	CAN \$X	(/H	8 8	H H	X X	h +H	x +X								
HT \$I	EM \$Y	) /I	9 9	I I	Y Y	i +I	y +Y								
LF \$J	SUB \$Z	* /J	:	/Z	J J	Z Z	j +J	z +Z							
VT \$K	ESC %A	+ /K	;	%F	K K	[%K	k +K	{ %P							
FF \$L	FS %B	, /L	<	%G	L L	\ %L	l +L	%Q							
CR \$M	GS %C	- -	=	%H	M M	] %M	m +M	} %R							
SO \$N	RS %D	. .	>	%I	N N	^ %N	n +N	~ %S							
SI \$O	US %E	/ /O	?	%J	O O	_ %O	o +O	DEL %T							

Character pairs /M and /N decode as a minus sign and period respectively. Character pairs /P through /Y decode as 0 through 9.



C39ASC1.
Full ASCII On



C39ASC0.
* Full ASCII Off

Interleaved 2 of 5

< Default All Interleaved 2 of 5 Settings >



Interleaved 2 of 5 On/Off



NULL Characters

Interleaved 2 of 5 requires an even number of characters. When an odd number of characters is present, it is due to NULL characters embedded in the bar code. Scan the **On** bar code below to decode this type of Interleaved 2 of 5 bar code. *Default = Off.*



Check Digit

No Check Digit indicates that the scanner reads and transmits bar code data with or without a check digit.

When Check Digit is set to **Validate, but Don't Transmit**, the unit only reads Interleaved 2 of 5 bar codes printed with a check digit, but will not transmit the check digit with the scanned data.

When Check Digit is set to **Validate and Transmit**, the scanner only reads Interleaved 2 of 5 bar codes printed with a check digit, and will transmit this digit at the end of the scanned data. *Default = No Check Digit.*



I25CK20.
*** No Check Digit**



I25CK21.
Validate, but Don't Transmit



I25CK22.
Validate and Transmit

Interleaved 2 of 5 Redundancy

If you are encountering errors when reading Interleaved 2 of 5 bar codes, you may want to adjust the redundancy count. Redundancy adjusts the number of times a bar code is decoded before transmission, which may reduce the number of errors. Note that the higher the redundancy count, the longer it will take to decode the bar code. To adjust the redundancy, scan the **Interleaved 2 of 5 Redundancy** bar code below, then scan a redundancy count between 0 and 10 on the [Programming Chart](#) on page 202. Then scan the [Save](#) bar code. *Default = 0.*



I25VOT.
Interleaved 2 of 5

Interleaved 2 of 5 Message Length

Scan the bar codes below to change the message length. Refer to [Message Length Description](#) (page 88) for additional information. Minimum and Maximum lengths = 2-80. Minimum Default = 6, Maximum Default = 80.



I25MIN.
Minimum Message Length



I25MAX.
Maximum Message Length

NEC 2 of 5

< Default All NEC 2 of 5 Settings >



NEC 2 of 5 On/Off



Check Digit

No Check Digit indicates that the scanner reads and transmits bar code data with or without a check digit.

When Check Digit is set to **Validate, but Don't Transmit**, the unit only reads NEC 2 of 5 bar codes printed with a check digit, but will not transmit the check digit with the scanned data.

When Check Digit is set to **Validate and Transmit**, the scanner only reads NEC 2 of 5 bar codes printed with a check digit, and will transmit this digit at the end of the scanned data. *Default = No Check Digit.*



NEC 2 of 5 Redundancy

If you are encountering errors when reading NEC 2 of 5 bar codes, you may want to adjust the redundancy count. Redundancy adjusts the number of times a bar code is decoded before transmission, which may reduce the number of errors. Note that the higher the redundancy count, the longer it will take to decode the bar code. To adjust the redundancy, scan the **NEC 2 of 5 Redundancy bar code below, then scan a redundancy count between 0 and 10 on the [Programming Chart](#)** on page 202. Then scan the [Save](#) bar code. *Default = 0.*



N25VOT.

NEC 2 of 5 Redundancy

NEC 2 of 5 Message Length

Scan the bar codes below to change the message length. Refer to [Message Length Description](#) (page 88) for additional information. Minimum and Maximum lengths = 1-80. Minimum Default = 3, Maximum Default = 80.



N25MIN.

Minimum Message Length



N25MAX.

Maximum Message Length

Code 93

< Default All Code 93 Settings >



C93DFT.

Code 93 On/Off



C93ENA1.

* On



C93ENAO.

Off

Code 93 Redundancy

If you are encountering errors when reading Code 93 bar codes, you may want to adjust the redundancy count. Redundancy adjusts the number of times a bar code is decoded before transmission, which may reduce the number of errors. Note that the higher the redundancy count, the longer it will take to decode the bar code. To adjust the redundancy, scan the **Code 93 Redundancy** bar code below, then scan a redundancy count between 0 and 10 on the [Programming Chart](#) on page 202. Then scan the [Save](#) bar code. *Default = 0.*



C93VOT.

Code 93 Redundancy

Code 93 Message Length

Scan the bar codes below to change the message length. Refer to [Message Length Description](#) (page 88) for additional information. Minimum and Maximum lengths = 1-80. Minimum Default = 3, Maximum Default = 80.



C93MIN.

Minimum Message Length



C93MAX.

Maximum Message Length

Straight 2 of 5 Industrial (three-bar start/stop)

<Default All Straight 2 of 5 Industrial Settings>



R25DFT.

Straight 2 of 5 Industrial On/Off



R25ENA1.

On



R25ENA0.

*** Off**

Straight 2 of 5 Industrial Redundancy

If you are encountering errors when reading Straight 2 of 5 Industrial bar codes, you may want to adjust the redundancy count. Redundancy adjusts the number of times a bar code is decoded before transmission, which may reduce the number of errors. Note that the higher the redundancy count, the longer it will take to decode the bar code. To adjust the redundancy, scan the **Straight 2 of 5 Industrial Redundancy** bar code below, then scan a redundancy count between 0 and 10 on the [Programming Chart](#) on page 202. Then scan the [Save](#) bar code. *Default = 0.*



Straight 2 of 5 Industrial Message Length

Scan the bar codes below to change the message length. Refer to [Message Length Description](#) (page 88) for additional information. Minimum and Maximum lengths = 1-80. Minimum Default = 3, Maximum Default = 80.



Straight 2 of 5 IATA (two-bar start/stop)

Note: This symbology is also known as Airline Code 5.

<Default All Straight 2 of 5 IATA Settings>



Straight 2 of 5 IATA On/Off





Straight 2 of 5 IATA Redundancy

If you are encountering errors when reading Straight 2 of 5 IATA bar codes, you may want to adjust the redundancy count. Redundancy adjusts the number of times a bar code is decoded before transmission, which may reduce the number of errors. Note that the higher the redundancy count, the longer it will take to decode the bar code. To adjust the redundancy, scan the **Straight 2 of 5 IATA Redundancy** bar code below, then scan a redundancy count between 0 and 10 on the [Programming Chart](#) on page 202. Then scan the [Save](#) bar code. *Default = 0.*



Straight 2 of 5 IATA Message Length

Scan the bar codes below to change the message length. Refer to [Message Length Description](#) (page 88) for additional information. Minimum and Maximum lengths = 1-80. Minimum Default = 13, Maximum Default = 15.



Matrix 2 of 5

<Default All Matrix 2 of 5 Settings>



Matrix 2 of 5 On/Off



Matrix 2 of 5 Check Character

No Check Character indicates that the scanner reads and transmits bar code data with or without a check character.

When Check Character is set to **Validate, but Don't Transmit**, the unit only reads Matrix 2 of 5 bar codes printed with a check character, but will not transmit the check character with the scanned data.

When Check Character is set to **Validate and Transmit**, the scanner only reads Matrix 2 of 5 bar codes printed with a check character, and will transmit this character at the end of the scanned data. *Default = No Check Character.*



Matrix 2 of 5 Redundancy

If you are encountering errors when reading Matrix 2 of 5 bar codes, you may want to adjust the redundancy count. Redundancy adjusts the number of times a bar code is decoded before transmission, which may reduce the number of errors. Note

that the higher the redundancy count, the longer it will take to decode the bar code. To adjust the redundancy, scan the **Matrix 2 of 5 Redundancy** bar code below, then scan a redundancy count between 0 and 10 on the [Programming Chart](#) on page 202. Then scan the [Save](#) bar code. *Default = 0.*



X25VOT.

Matrix 2 of 5 Redundancy

Matrix 2 of 5 Message Length

Scan the bar codes below to change the message length. Refer to [Message Length Description](#) (page 88) for additional information. Minimum and Maximum lengths = 1-80. Minimum Default = 3, Maximum Default = 80.



X25MIN.

Minimum Message Length



X25MAX.

Maximum Message Length

Code 11

<Default All Code 11 Settings>



C11DFT.

Code 11 On/Off



C11ENA1.

On



C11ENA0.

*** Off**

Check Digits Required

These options set whether 1 or 2 check digits are required with Code 11 bar codes. **Auto Select Check Digits** determines the number of check digits based on the length of the bar code. If the bar code is 10 digits or more, 2 check digits are required. If it is 9 digits or less, 1 check digit is required. The check digit data is only transmitted if you program that feature (see [Check Digit Validation](#) on page 104).

Default = Two Check Digits Required.



C11CK20.

One Check Digit Required



C11CK21.

*** Two Check Digits Required**



C11CK22.

**Auto Select Check Digits
Required**

Check Digit Validation

When Check Character is set to **Validate and Transmit**, the scanner will only read Code 11 bar codes printed with the specified type check character(s), and will transmit the character(s) at the end of the scanned data.



C11CK23.

**Validate and Transmit One
Check Digit**



C11CK24.

**Validate and Transmit Two
Check Digits**



C11CK25.

**Validate and Transmit Auto
Select Check Digits**

Code 11 Redundancy

If you are encountering errors when reading Code 11 bar codes, you may want to adjust the redundancy count. Redundancy adjusts the number of times a bar code is decoded before transmission, which may reduce the number of errors. Note that the higher the redundancy count, the longer it will take to decode the bar code. To

adjust the redundancy, scan the **Code 11 Redundancy** bar code below, then scan a redundancy count between 0 and 10 on the [Programming Chart](#) on page 202. Then scan the [Save](#) bar code. *Default = 0.*



C11VOT.

Code 11 Redundancy

Code 11 Message Length

Scan the bar codes below to change the message length. Refer to [Message Length Description](#) (page 88) for additional information. Minimum and Maximum lengths = 1-80. Minimum Default = 3, Maximum Default = 80.



C11MIN.

Minimum Message Length



C11MAX.

Maximum Message Length

Code 128

<Default All Code 128 Settings>



128DFT.

Code 128 On/Off



128ENA1.

*** On**



128ENA0.

Off

128 Group Separator Output

If you wish to transmit the group separator characters “GS” (0x1D hex) with your Code 128 bar code output, scan the **On** bar code. When **Off** is scanned, the group separator is not output. *Default = Off.*



128GSE1.

On



128GSE0.

*** Off**

Code 128 Redundancy

If you are encountering errors when reading Code 128 bar codes, you may want to adjust the redundancy count. Redundancy adjusts the number of times a bar code is decoded before transmission, which may reduce the number of errors. Note that the higher the redundancy count, the longer it will take to decode the bar code. To adjust the redundancy, scan the Code 128 Redundancy bar code below, then scan a redundancy count between 0 and 10 on the [Programming Chart](#) on page 202. Then scan the [Save](#) bar code. *Default = 0.*



128VOT.

Code 128 Redundancy

Code 128 Message Length

Scan the bar codes below to change the message length. Refer to [Message Length Description](#) (page 88) for additional information. Minimum and Maximum lengths = 1-80. Minimum Default = 1, Maximum Default = 80.



128MIN.

Minimum Message Length



128MAX.

Maximum Message Length

ISBT 128

ISBT is a variation of Code 128 that supports concatenation of neighboring symbols on a blood product label. Use the bar codes below to turn ISBT 128 concatenation on or off. *Default = Off.*



ISBENA1.

On



ISBENA0.

*** Off**

Concatenation Timeout

When searching for bar codes during concatenation, you may wish to set a delay used to find the next bar code. Set the length (in milliseconds) for this delay by scanning the bar code below, then setting the timeout (from 1-65535 milliseconds) by scanning digits from the [Programming Chart](#), then scanning [Save](#).
Default = 750.



DLYCCT.

Concatenation Timeout

ISBT 128 Predefined Concatenation Sequences

Note: You must enable Code 128 and ISBT 128 to use this feature.

The following bar codes are used to select the pre-defined ISBT 128 Concatenation Sequence you wish to use. Once you have selected the concatenation sequence, use [ISBT 128 Predefined Concatenation Sequences On/Off](#) to enable this feature.
Default = Donation ID Number (001) and ABO/RhD Blood Groups (002).



ISBPCS0.

*** Donation ID Number (001)
and ABO/RhD Blood Groups (002)**



ISBPCS1.

**Donation ID Number (001) and
Donor ID Number (019)**



ISBPCS2.

Donation ID Number (001) and
Confidential Unit Exclusion
Status



ISBPCS3.

Product Code (003) and
Expiration Date (Form 1)



ISBPCS4.

Product Code (003) and
Expiration Date (Form 2)



ISBPCS5.

Product Code (003) and
Expiration Date (Form 3)



ISBPCS6.

Product Code (003) and
Expiration Date (Form 4)

ISBT 128 Predefined Concatenation Sequences On/Off

The following selections allow you to enable or require the Predefined ISBT 128 Concatenation Sequences.

If you scan **Off**, the predefined concatenation sequences are disabled.

If you scan the **Allow Predefined Sequence** code, then the scanner will output only the data combination specified in the predefined concatenation sequence you selected.

If you scan the **Require Predefined Sequence** code, the data combination specified in the predefined concatenation sequence you selected is required to transmit the data. No data is output unless the sequence is read.

Default = Off.



ISBPCE0.

*** Off**



ISBPCE1.

Allow Predefined Sequence



ISBT 128 User-Defined Concatenation Sequences

Note: You must enable Code 128 and ISBT 128 to use this feature.

The following bar codes are used to create a custom ISBT 128 Concatenation Sequence. Select the identifiers you want to transmit in the 1st and 2nd positions, both left and right. Refer to the ISBT 128 Standard Technical Specification for the list of data identifiers.

Use the [ASCII Conversion Chart \(Code Page 1252\)](#), beginning on page 192, to find the characters needed for the identifier. Locate the hex value for each character and scan that 2 digit/character value from the [Programming Chart](#) on page 202.

Example: You want to create a concatenation sequence that has the Donation Identification Number (001) as the left identifier, and Product Code (003) as the right identifier. The ISBT Index of Data Structures shows that for the Donation Identification Number, the first character is “=” and the second character can be from A-N; P-Z; 1-9. For this example, use “G.” The Product Code first character is “=” and the second character is “<.”

- Step 1. Scan the **1st Left Identifier** bar code, below.
- Step 2. Use the [Programming Chart](#) to scan 3, D (hex for “=”).
- Step 3. Scan [Save](#).
- Step 4. Scan the **2nd Left Identifier** bar code, below.
- Step 5. Use the [Programming Chart](#) to scan 4, 7 (hex for “G”).
- Step 6. Scan [Save](#).
- Step 7. Scan the **1st Right Identifier** bar code, below.
- Step 8. Use the [Programming Chart](#) to scan 3, D (hex for “=”).
- Step 9. Scan [Save](#).
- Step 10. Scan the **2nd Right Identifier** bar code, below.
- Step 11. Use the [Programming Chart](#) to scan 3, C (hex for “<”).
- Step 12. Scan [Save](#).

Once you have programmed the concatenation sequence, use [ISBT 128 User-Defined Concatenation Sequences](#) to enable this feature. *Default = 0.*





ISBUR1.
1st Right Identifier



ISBUL2.
2nd Left Identifier



ISBUR2.
2nd Right Identifier

ISBT 128 User-Defined Concatenation Sequences On/Off

The following selections allow you to enable or require the User-Defined ISBT 128 Concatenation Sequences.

If you scan **Off**, the User-Defined concatenation sequences are disabled.

If you scan the **Allow User-Defined Sequence** code, then the scanner will output only the data combination specified in the User-Defined concatenation sequence you created.

If you scan the **Require User-Defined Sequence** code, the data combination specified in the User-Defined concatenation sequence is required to transmit the data. No data is output unless the sequence is read.

Default = Off.



ISBUCE0.
* Off



ISBUCE1.
Allow User-Defined Sequence



ISBUCE2.
Require User-Defined
Sequence

Content Verification

When the **On** bar code is scanned, the check character values are output along with the bar code data, thus allowing you to verify that the check character is in agreement with that calculated for the data stream. *Default = Off.*



Transmit Identifiers

You may disable the transmission of the ISBT Code 128 data identifiers by scanning **Off**. When this selection is Off, the first 2 data (ID) characters are removed from the data stream unless the ISBT code contains the Donation Identification Number identifiers. If the code contains the Donation Identification Number identifiers, only the first ID character is removed from the Donation Identification Number. The second character is transmitted as normal data. *Default = On.*



Flag Digit Conversion

Type 3 flag digits are a part of the Donation Identification Number in an ISBT 128 bar code. If you select **On**, the flag data is converted into a single MOD (37, 2) character and transmitted with the bar code data. Scan **Off** if you do not want the flag digits transmitted. *Default = Off.*



GS1-128

<Default All GS1-128 Settings>



GS1-128 On/Off



GS1-128 Application Identifier Parsing

This allows a single GS1-128 bar code to be broken into multiple transmissions based on the presence of application identifiers (AI) embedded in the bar code. Scan **Transmit Without Identifiers** if you want the bar code broken into packets and stripped of the AI. If you want the AI included, scan **Transmit With Identifiers**.
Default = Off.



GS1-128 Redundancy

If you are encountering errors when reading GS1-128 bar codes, you may want to adjust the redundancy count. Redundancy adjusts the number of times a bar code is decoded before transmission, which may reduce the number of errors. Note that the higher the redundancy count, the longer it will take to decode the bar code. To

adjust the redundancy, scan the **GS1-128 Redundancy** bar code below, then scan a redundancy count between 0 and 10 on the [Programming Chart](#) on page 202. Then scan the [Save](#) bar code. *Default = 0.*



GS1-128 Message Length

Scan the bar codes below to change the message length. Refer to [Message Length Description](#) (page 88) for additional information. Minimum and Maximum lengths = 1-80. Minimum Default = 3, Maximum Default = 80.



Telepen

<Default All Telepen Settings>



Telepen On/Off



Telepen Output

Using **AIM Telepen Output**, the scanner reads symbols with start/stop pattern 1 and decodes them as standard full ASCII (start/stop pattern 1). When **Original Telepen Output** is selected, the scanner reads symbols with start/stop pattern 1 and decodes them as compressed numeric with optional full ASCII (start/stop pattern 2). *Default = AIM Telepen Output.*



TELOLD0.

* AIM Telepen Output



TELOLD1.

Original Telepen Output

Telepen Redundancy

If you are encountering errors when reading Telepen bar codes, you may want to adjust the redundancy count. Redundancy adjusts the number of times a bar code is decoded before transmission, which may reduce the number of errors. Note that the higher the redundancy count, the longer it will take to decode the bar code. To adjust the redundancy, scan the **Telepen Redundancy** bar code below, then scan a redundancy count between 0 and 10 on the [Programming Chart](#) on page 202. Then scan the [Save](#) bar code. *Default = 0.*



TELVOT.

Telepen Redundancy

Telepen Message Length

Scan the bar codes below to change the message length. Refer to [Message Length Description](#) (page 88) for additional information. Minimum and Maximum lengths = 1-80. Minimum Default = 3, Maximum Default = 80.



TELMIN.

Minimum Message Length



TELMAX.

Maximum Message Length

UPC-A

<Default All UPC-A Settings>



UPC-A On/Off



Note: To convert UPC-A bar codes to EAN-13, see [Convert UPC-A to EAN-13](#) on page 124.

UPC-A Number System and Check Digit

UPC-A sample showing the number system and check digit:



UPC-A Number System

The numeric system digit of a U.P.C. symbol is normally transmitted at the beginning of the scanned data, but can be programmed so it is not transmitted (**Off**).
Default = On.



UPC-A Check Digit

This selection allows you to specify whether or not the check digit should be transmitted at the end of the scanned data. *Default = On.*



UPC-A Addenda

This selection adds 2 or 5 digits to the end of all scanned UPC-A data. *Default = Off for both 2 Digit and 5 Digit Addenda.*



UPC-A Addenda Required

When **Required** is scanned, the scanner will only read UPC-A bar codes that have addenda. You must then turn on a 2 or 5 digit addenda listed on [page 116](#). *Default = Not Required.*



Addenda Timeout

You can set a time during which the scanner looks for an addenda. If an addenda is not found within this time period, the data can be either transmitted or discarded, based on the setting you are using for [UPC-A Addenda Required](#) (see page 116). Set the length (in milliseconds) for this timeout by scanning the bar code below, then setting the timeout (from 0-65535 milliseconds) by scanning digits from the [Programming Chart](#), then scanning [Save](#). *Default = 100.*

Note: The Addenda Timeout setting is applied to all addenda and coupon code searches.



DLYADD.

Addenda Timeout

UPC-A Addenda Separator

When this feature is **On**, there is a space between the data from the bar code and the data from the addenda. When turned **Off**, there is no space. *Default = On.*



UPAADS1.

* On



UPAADS0.

Off

UPC-A Redundancy

If you are encountering errors when reading UPC-A bar codes, you may want to adjust the redundancy count. Redundancy adjusts the number of times a bar code is decoded before transmission, which may reduce the number of errors. Note that the higher the redundancy count, the longer it will take to decode the bar code. To adjust the redundancy, scan the **UPC-A Redundancy** bar code below, then scan a redundancy count between 0 and 10 on the [Programming Chart](#) on page 202. Then scan the [Save](#) bar code. *Default = 0.*



UPAVOT.

UPC-A Redundancy

UPC-A/EAN-13 with Extended Coupon Code

Use the following codes to enable or disable UPC-A and EAN-13 with Extended Coupon Code. When left on the default setting (**Off**), the scanner treats Coupon Codes and Extended Coupon Codes as single bar codes.

If you scan the **Allow Concatenation** code, when the scanner sees the coupon code and the extended coupon code in a single scan, it transmits both as one symbology. Otherwise, it transmits the first coupon code it reads.

If you scan the **Require Concatenation** code, the scanner must see and read the coupon code and extended coupon code in a single read to transmit the data. No data is output unless both codes are read. *Default = Off.*



CPNENA0.

*** Off**



CPNENA1.

Allow Concatenation



CPNENA2.

Require Concatenation

UPC-A Number System 4 Addenda Required

This setting programs the scanner to require a coupon code only on UPC-A bar codes that begin with a “4.” The following settings can be programmed:

Require Coupon Code: All UPC-A bar codes that begin with a “4” must have a coupon code. The UPC-A bar code with the coupon code is then transmitted as a single, concatenated bar code. If a coupon code is not found within the [Addenda Timeout](#) period, the UPC-A bar code is discarded.

Don't Require Coupon Code: If you have selected **Require Coupon Code**, and you want to disable this feature, scan **Don't Require Coupon Code**. UPC-A bar codes are transmitted, depending on the setting you are using for [UPC-A/EAN-13 with Extended Coupon Code](#). *Default = Don't Require Coupon Code.*



ARQSY40.

*** Don't Require Coupon Code**



ARQSY41.

Require Coupon Code

UPC-A Number System 5 Addenda Required

This setting programs the scanner to require any combination of a coupon code, a 2 digit addenda, or a 5 digit addenda on UPC-A bar codes that begin with a “5.” The following settings can be programmed:

Require Coupon Code/Addenda: All UPC-A bar codes that begin with a “5” must have a coupon code, a 2 digit addenda, a 5 digit addenda, or a combination of these addenda. The UPC-A bar code with the coupon code and/or addenda is then transmitted as a single, concatenated bar code. If a coupon code and/or required addenda is not found within the [Addenda Timeout](#) period, the UPC-A bar code is discarded.

Don’t Require Coupon Code/Addenda: If you have selected **Require Coupon Code/Addenda**, and you want to disable this feature, scan **Don’t Require Coupon Code/Addenda**. UPC-A bar codes are transmitted, depending on the setting you are using for [UPC-A/EAN-13 with Extended Coupon Code](#). *Default = Don’t Require Coupon Code/Addenda.*



ARQSY50.

* Don’t Require Coupon Code/
Addenda



ARQSY51.

Require 2 Digit Addenda



ARQSY52.

Require 5 Digit Addenda



ARQSY53.

Require 2 or 5 Digit Addenda



ARQSY54.

Require Coupon Code



ARQSY55.

Require Coupon Code or 2 Digit
Addenda



ARQSY56.

Require Coupon Code or 5 Digit
Addenda



ARQSY57.

Require Coupon Code, 2 Digit Addenda, or 5 Digit Addenda

Addenda Timeout

You can set a time during which the scanner looks for a coupon code. If a coupon code is not found within this time period, the data can be either transmitted or discarded, based on the setting you are using for [UPC-A/EAN-13 with Extended Coupon Code](#) or [UPC-A Number System 4 Addenda Required](#). Set the length (in milliseconds) for this timeout by scanning the bar code below, then setting the timeout (from 0-65535 milliseconds) by scanning digits from the [Programming Chart](#), then scanning [Save](#). *Default = 100.*

Note: *The Addenda Timeout setting is applied to all addenda and coupon code searches.*



DLYADD.

Addenda Timeout

UPC-E0

<Default All UPC-E Settings>



UPEDFT.

UPC-E0 On/Off

Most U.P.C. bar codes lead with the 0 number system. To read these codes, use the UPC-E0 On selection. If you need to read codes that lead with the 1 number system, use [EAN/JAN-13](#) (page 124). *Default = On.*



UPEEN01.

*** UPC-E0 On**



UPEEN00.

UPC-E0 Off

UPC-E0 Expand

UPC-E Expand expands the UPC-E code to the 12 digit, UPC-A format.
Default = Off.



UPC-E0 Number System

The numeric system digit of a UPC-A symbol is normally transmitted at the beginning of scanned data. When using UPC-E Expand, the unit can be programmed so it will not transmit it. *Default = On.*



UPC-E0 Number System and Check Digit

UPC-E0 sample showing the number system and check digit:



UPC-E0 Check Digit

Check Digit specifies whether the check digit should be transmitted at the end of the scanned data or not. *Default = Off.*





UPC-E0 Leading Zero

This feature allows the transmission of a leading zero (0) at the beginning of scanned data. To prevent transmission, scan **Off**. *Default = On.*



UPC-E0 Addenda

This selection adds 2 or 5 digits to the end of all scanned UPC-E data. *Default = Off for both 2 Digit and 5 Digit Addenda.*



UPC-E0 Addenda Required

When **Required** is scanned, the scanner will only read UPC-E bar codes that have addenda. *Default = Not Required.*



UPEARQ1.

Required



UPEARQ0.

*** Not Required**

Addenda Timeout

You can set a time during which the scanner looks for an addenda. If an addenda is not found within this time period, the data can be either transmitted or discarded, based on the setting you are using for [UPC-E0 Addenda Required](#) (page 123). Set the length (in milliseconds) for this timeout by scanning the bar code below, then setting the timeout (from 0-65535 milliseconds) by scanning digits from the [Programming Chart](#), then scanning [Save](#). *Default = 100.*

Note: The Addenda Timeout setting is applied to all addenda and coupon code searches.



DLYADD.

Addenda Timeout

UPC-E0 Addenda Separator

When this feature is **On**, there is a space between the data from the bar code and the data from the addenda. When turned **Off**, there is no space. *Default = On.*



UPEADS1.

*** On**



UPEADS0.

Off

UPC-E0 Redundancy

If you are encountering errors when reading UPC-E0 bar codes, you may want to adjust the redundancy count. Redundancy adjusts the number of times a bar code is decoded before transmission, which may reduce the number of errors. Note that the higher the redundancy count, the longer it will take to decode the bar code. To

adjust the redundancy, scan the **UPC-E0 Redundancy** bar code below, then scan a redundancy count between 0 and 10 on the [Programming Chart](#) on page 202. Then scan the [Save](#) bar code. *Default = 1.*



EAN/JAN-13

<Default All EAN/JAN Settings>



EAN/JAN-13 On/Off



Convert UPC-A to EAN-13

When **UPC-A Converted to EAN-13** is selected, UPC-A bar codes are converted to 13 digit EAN-13 codes by adding a zero to the front. When **Do not Convert UPC-A** is selected, UPC-A codes are read as UPC-A.



EAN/JAN-13 Check Digit

This selection allows you to specify whether the check digit should be transmitted at the end of the scanned data or not. *Default = On.*



E13CKX1.

*** On**



E13CKX0.

Off

EAN/JAN-13 Addenda

This selection adds 2 or 5 digits to the end of all scanned EAN/JAN-13 data. *Default = Off for both 2 Digit and 5 Digit Addenda.*



E13AD21.

2 Digit Addenda On



E13AD20.

*** 2 Digit Addenda Off**



E13AD51.

5 Digit Addenda On



E13AD50.

*** 5 Digit Addenda Off**

EAN/JAN-13 Addenda Required

When **Required** is scanned, the scanner will only read EAN/JAN-13 bar codes that have addenda. *Default = Not Required.*



E13ARQ1.

Required



E13ARQ0.

*** Not Required**

EAN-13 Beginning with 2 Addenda Required

This setting programs the scanner to require a 2 digit addenda only on EAN-13 bar codes that begin with a “2.” The following settings can be programmed:

Require 2 Digit Addenda: All EAN-13 bar codes that begin with a “2” must have a 2 digit addendum. The EAN-13 bar code with the 2 digit addendum is then transmitted as a single, concatenated bar code. If a 2 digit addendum is not found within the [Addenda Timeout](#) period, the EAN-13 bar code is discarded.

Note: if you are using [EAN-13 Beginning with 290 Addenda Required](#) (page 126), that setting will take precedence over this one.

Don’t Require 2 Digit Addenda: If you have selected **Require 2 Digit Addenda**, and you want to disable this feature, scan **Don’t Require 2 Digit Addenda**. EAN-13 bar codes are transmitted, depending on the setting you are using for [EAN/JAN-13 Addenda Required](#). Default = *Don’t Require 2 Digit Addenda*.



ARQSY20.

* Don’t Require 2 Digit Addenda



ARQSY21.

Require 2 Digit Addenda

EAN-13 Beginning with 290 Addenda Required

This setting programs the scanner to require a 5 digit addenda only on EAN-13 bar codes that begin with “290.” The following settings can be programmed:

Require 5 Digit Addenda: All EAN-13 bar codes that begin with “290” must have a 5 digit addendum. The EAN-13 bar code with the 5 digit addendum is then transmitted as a single, concatenated bar code. If a 5 digit addendum is not found within the [Addenda Timeout](#) period, the EAN-13 bar code is discarded.

Note: if you are using [EAN-13 Beginning with 2 Addenda Required](#) (page 126), this setting will take precedence.

Don’t Require 5 Digit Addenda: If you have selected **Require 5 Digit Addenda**, and you want to disable this feature, scan **Don’t Require 5 Digit Addenda**. EAN-13 bar codes are transmitted, depending on the setting you are using for [EAN/JAN-13 Addenda Required](#). Default = *Don’t Require 5 Digit Addenda*.



ARQ2900.

* Don’t Require 5 Digit Addenda



EAN-13 Beginning with 378/379 Addenda Required

This setting programs the scanner to require any combination of a 2 digit addenda or a 5 digit addenda on EAN-13 bar codes that begin with a “378” or “379.” The following settings can be programmed:

Require Addenda: All EAN-13 bar codes that begin with a “378” or “379” must have a 2 digit addenda, a 5 digit addenda, or a combination of these addenda. The EAN-13 bar code with the addenda is then transmitted as a single, concatenated bar code. If the required addenda is not found within the [Addenda Timeout](#) period, the EAN-13 bar code is discarded.

Don't Require Addenda: If you have selected **Require Addenda**, and you want to disable this feature, scan **Don't Require Addenda**. EAN-13 bar codes are transmitted, depending on the setting you are using for [EAN/JAN-13 Addenda Required](#).
Default = Don't Require Addenda.



* Don't Require Addenda



Require 2 Digit Addenda



Require 5 Digit Addenda



Require 2 or 5 Digit Addenda

EAN-13 Beginning with 414/419 Addenda Required

This setting programs the scanner to require any combination of a 2 digit addenda or a 5 digit addenda on EAN-13 bar codes that begin with a “414” or “419.” The following settings can be programmed:

Require Addenda: All EAN-13 bar codes that begin with a “414” or “419” must have a 2 digit addenda, a 5 digit addenda, or a combination of these addenda. The EAN-13 bar code with the addenda is then transmitted as a single, concatenated bar code. If the required addenda is not found within the [Addenda Timeout](#) period, the EAN-13 bar code is discarded.

Don’t Require Addenda: If you have selected **Require Addenda**, and you want to disable this feature, scan **Don’t Require Addenda**. EAN-13 bar codes are transmitted, depending on the setting you are using for [EAN/JAN-13 Addenda Required](#).
Default = Don’t Require Addenda.



ARQ4140.

* Don’t Require Addenda



ARQ4141.

Require 2 Digit Addenda



ARQ4142.

Require 5 Digit Addenda



ARQ4143.

Require 2 or 5 Digit Addenda

EAN-13 Beginning with 434/439 Addenda Required

This setting programs the scanner to require any combination of a 2 digit addenda or a 5 digit addenda on EAN-13 bar codes that begin with a “434” or “439.” The following settings can be programmed:

Require Addenda: All EAN-13 bar codes that begin with a “434” or “439” must have a 2 digit addenda, a 5 digit addenda, or a combination of these addenda. The EAN-13 bar code with the addenda is then transmitted as a single, concatenated bar code. If the required addenda is not found within the [Addenda Timeout](#) period, the EAN-13 bar code is discarded.

Don’t Require Addenda: If you have selected **Require Addenda**, and you want to disable this feature, scan **Don’t Require Addenda**. EAN-13 bar codes are transmitted, depending on the setting you are using for [EAN/JAN-13 Addenda Required](#).
Default = Don’t Require Addenda.



ARQ4340.

* Don’t Require Addenda



ARQ4342.

Require 5 Digit Addenda



ARQ4341.

Require 2 Digit Addenda



ARQ4343.

Require 2 or 5 Digit Addenda

EAN-13 Beginning with 977 Addenda Required

This setting programs the scanner to require a 2 digit addenda only on EAN-13 bar codes that begin with “977.” The following settings can be programmed:

Require 2 Digit Addenda: All EAN-13 bar codes that begin with “977” must have a 2 digit addendum. The EAN-13 bar code with the 2 digit addendum is then transmitted as a single, concatenated bar code. If a 2 digit addendum is not found within the [Addenda Timeout](#) period, the EAN-13 bar code is discarded.

Don't Require 2 Digit Addenda: If you have selected **Require 2 Digit Addenda**, and you want to disable this feature, scan **Don't Require 2 Digit Addenda**. EAN-13 bar codes are transmitted, depending on the setting you are using for [EAN/JAN-13 Addenda Required](#). *Default = Don't Require 2 Digit Addenda.*



ARQ9770.

*** Don't Require 2 Digit Addenda**



ARQ9771.

Require 2 Digit Addenda

EAN-13 Beginning with 978 Addenda Required

These settings program the scanner to require a 5 digit addenda only on EAN-13 bar codes that begin with “978.” The following settings can be programmed:

Require 5 Digit Addenda: All EAN-13 bar codes that begin with “978” must have a 5 digit addendum. The EAN-13 bar code with the 5 digit addendum is then transmitted as a single, concatenated bar code. If a 5 digit addendum is not found within the [Addenda Timeout](#) period, the EAN-13 bar code is discarded.

Don't Require 5 Digit Addenda: If you have selected **Require 5 Digit Addenda**, and you want to disable this feature, scan **Don't Require 5 Digit Addenda**. EAN-13 bar codes are transmitted, depending on the setting you are using for [EAN/JAN-13 Addenda Required](#). *Default = Don't Require 5 Digit Addenda.*



ARQ9780.

* Don't Require 5 Digit Addenda



ARQ9781.

Require 5 Digit Addenda

EAN-13 Beginning with 979 Addenda Required

These settings program the scanner to require a 5 digit addenda only on EAN-13 bar codes that begin with “979.” The following settings can be programmed:

Require 5 Digit Addenda: All EAN-13 bar codes that begin with “979” must have a 5 digit addendum. The EAN-13 bar code with the 5 digit addendum is then transmitted as a single, concatenated bar code. If a 5 digit addendum is not found within the [Addenda Timeout](#) period, the EAN-13 bar code is discarded.

Don't Require 5 Digit Addenda: If you have selected **Require 5 Digit Addenda**, and you want to disable this feature, scan **Don't Require 5 Digit Addenda**. EAN-13 bar codes are transmitted, depending on the setting you are using for [EAN/JAN-13 Addenda Required](#). *Default = Don't Require 5 Digit Addenda.*



ARQ9790.

* Don't Require 5 Digit Addenda



ARQ9791.

Require 5 Digit Addenda

Addenda Timeout

You can set a time during which the scanner looks for an addenda. If an addenda is not found within this time period, the data can be either transmitted or discarded, based on the setting you are using for [EAN/JAN-13 Addenda Required](#). Set the

length (in milliseconds) for this timeout by scanning the bar code below, then setting the timeout (from 0-65535 milliseconds) by scanning digits from the [Programming Chart](#), then scanning [Save](#). *Default = 100.*

Note: *The Addenda Timeout setting is applied to all addenda and coupon code searches.*



EAN/JAN-13 Addenda Separator

When this feature is On, there is a space between the data from the bar code and the data from the addenda. When turned Off, there is no space.
Default = Off.



Note: *If you want to enable or disable EAN13 with Extended Coupon Code, refer to [UPC-A/ EAN-13 with Extended Coupon Code](#) (page 118).*

EAN/JAN-13 Redundancy

If you are encountering errors when reading EAN/JAN-13 bar codes, you may want to adjust the redundancy count. Redundancy adjusts the number of times a bar code is decoded before transmission, which may reduce the number of errors. Note that the higher the redundancy count, the longer it will take to decode the bar code. To adjust the redundancy, scan the EAN/JAN-13 Redundancy bar code below, then scan a redundancy count between 0 and 10 on the [Programming Chart](#) on page 202. Then scan the [Save](#) bar code. *Default = 0.*



ISBN Translate

When **On** is scanned, EAN-13 Bookland symbols are translated into their equivalent ISBN number format. *Default = Off.*



E13ISB1.

On



E13ISB0.

*** Off**

Convert ISBN to 13-Digit

When translating EAN-13 codes to the ISBN format, you can convert the bar code to a 13 digit format by scanning the **Convert to 13-Digit On** bar code below. *Default = Convert to 13-Digit Off.*



E13I131.

Convert to 13-Digit On



E13I130.

***Convert to 13-Digit Off**

ISBN Reformat

In normal use, the first two or three digits of an EAN-13 bar code identify the country of origin. The country prefixes are 978 and 979. To reformat ISBN codes so the country prefix is dropped out, scan the **Reformat On** bar code below. *Default = Reformat Off.*



E13IBR1.

Reformat On



E13IBR0.

***Reformat Off**

ISSN Translate

When **On** is scanned, EAN-13 977 Bookland symbols are translated into their equivalent 8-digit ISSN number format. For example, 9770123456787 will be transmitted as 01234560. *Default = Off.*



ISSN Reformat

When **Reformat On** is scanned, EAN-13 977 Bookland symbols are translated into their equivalent 8-digit ISSN number format, with hyphens added to the output. For example, 9770123456787 will be transmitted as 0123-456-0. (You must first scan ISSN [On](#) (page 133) before scanning **Reformat On**.) *Default = Reformat Off.*



EAN/JAN-8

<Default All EAN/JAN-8 Settings>



EAN/JAN-8 On/Off





EAN/JAN-8 Check Digit

This selection allows you to specify whether or not the check digit should be transmitted at the end of the scanned data. *Default = On.*



EAN/JAN-8 Addenda

This selection adds 2 or 5 digits to the end of all scanned EAN/JAN-8 data. *Default = Off for both 2 Digit and 5 Digit Addenda.*



EAN/JAN-8 Addenda Required

When **Required** is scanned, the scanner will only read EAN/JAN-8 bar codes that have addenda. *Default = Not Required.*



EA8ARQ1.
Required



EA8ARQ0.
*** Not Required**

Addenda Timeout

You can set a time during which the scanner looks for an addenda. If an addenda is not found within this time period, the data can be either transmitted or discarded, based on the setting you are using for [EAN/JAN-8 Addenda Required](#). Set the length (in milliseconds) for this timeout by scanning the bar code below, then setting the timeout (from 0-65535 milliseconds) by scanning digits from the [Programming Chart](#), then scanning [Save](#). *Default = 100.*

Note: The Addenda Timeout setting is applied to all addenda and coupon code searches.



DLYADD.
Addenda Timeout

EAN/JAN-8 Addenda Separator

When this feature is **On**, there is a space between the data from the bar code and the data from the addenda. When turned **Off**, there is no space. *Default = On.*



EA8ADS1.
*** On**



EA8ADS0.
Off

EAN/JAN-8 Redundancy

If you are encountering errors when reading EAN/JAN-8 bar codes, you may want to adjust the redundancy count. Redundancy adjusts the number of times a bar code is decoded before transmission, which may reduce the number of errors. Note that the higher the redundancy count, the longer it will take to decode the bar code.

To adjust the redundancy, scan the **EAN/JAN-8 Redundancy** bar code below, then scan a redundancy count between 0 and 10 on the [Programming Chart](#) on page 202. Then scan the [Save](#) bar code. *Default = 0.*



MSI

<Default All MSI Settings>



MSI On/Off



MSI Check Character

Different types of check characters are used with MSI bar codes. You can program the scanner to read MSI bar codes with Type 10 check characters.
Default = Validate Type 10, but Don't Transmit.

When Check Character is set to **Validate Type 10/11 and Transmit**, the scanner will only read MSI bar codes printed with the specified type check character(s), and will transmit the character(s) at the end of the scanned data.

When Check Character is set to **Validate Type 10/11, but Don't Transmit**, the unit will only read MSI bar codes printed with the specified type check character(s), but will not transmit the check character(s) with the scanned data.





MSCHK2.
Validate 2 Type 10 Characters,
but Don't Transmit



MSCHK4.
Validate Type 11 then Type 10
Character, but Don't Transmit



MSCHK6.
Disable MSI Check Characters



MSCHK1.
Validate Type 10 and Transmit



MSCHK3.
Validate 2 Type 10 Characters
and Transmit



MSCHK5.
Validate Type 11 then
Type 10 Character and Transmit

MSI Redundancy

If you are encountering errors when reading MSI bar codes, you may want to adjust the redundancy count. Redundancy adjusts the number of times a bar code is decoded before transmission, which may reduce the number of errors. Note that the higher the redundancy count, the longer it will take to decode the bar code. To adjust the redundancy, scan the **MSI Redundancy** bar code below, then scan a redundancy count between 0 and 10 on the [Programming Chart](#) on page 202. Then scan the [Save](#) bar code. *Default = 0.*



MSIVOT.
MSI Redundancy

MSI Message Length

Scan the bar codes below to change the message length. Refer to [Message Length Description](#) (page 88) for additional information. Minimum and Maximum lengths = 1-80. Minimum Default = 3, Maximum Default = 80.



Plessey Code

< Default All Plessey Code Settings >



Plessey Code On/Off



Plessey Check Character

No Check Character indicates that the scanner reads and transmits bar code data with or without a check character.

When Check Character is set to **Validate, but Don't Transmit**, the unit only reads Plessey bar codes printed with a check character, but will not transmit the check character with the scanned data.

When Check Character is set to **Validate and Transmit**, the scanner only reads Plessey bar codes printed with a check character, and will transmit this character at the end of the scanned data. *Default = No Check Character.*



Plessey Redundancy

If you are encountering errors when reading Plessey bar codes, you may want to adjust the redundancy count. Redundancy adjusts the number of times a bar code is decoded before transmission, which may reduce the number of errors. Note that the higher the redundancy count, the longer it will take to decode the bar code. To adjust the redundancy, scan the **Plessey Redundancy** bar code below, then scan a redundancy count between 0 and 10 on the [Programming Chart](#) on page 202. Then scan the [Save](#) bar code. *Default = 0.*



Plessey Message Length

Scan the bar codes below to change the message length. Refer to [Message Length Description](#) (page 88) for additional information. Minimum and Maximum lengths = 1-80. Minimum Default = 3, Maximum Default = 80.



GS1 DataBar Omnidirectional

< Default All GS1 DataBar Omnidirectional Settings >



GS1 DataBar Omnidirectional On/Off



GS1 DataBar Omnidirectional Redundancy

If you are encountering errors when reading GS1 DataBar Omnidirectional bar codes, you may want to adjust the redundancy count. Redundancy adjusts the number of times a bar code is decoded before transmission, which may reduce the number of errors. Note that the higher the redundancy count, the longer it will take to decode the bar code. To adjust the redundancy, scan the **GS1 DataBar Omnidirectional Redundancy** bar code below, then scan a redundancy count between 0 and 10 on the [Programming Chart](#) on page 202. Then scan the [Save](#) bar code. Default = 0.



GS1 DataBar Limited

< Default All GS1 DataBar Limited Settings >



GS1 DataBar Limited On/Off



GS1 DataBar Limited Redundancy

If you are encountering errors when reading GS1 DataBar Limited bar codes, you may want to adjust the redundancy count. Redundancy adjusts the number of times a bar code is decoded before transmission, which may reduce the number of errors. Note that the higher the redundancy count, the longer it will take to decode the bar code. To adjust the redundancy, scan the **GS1 DataBar Limited Redundancy** bar code below, then scan a redundancy count between 0 and 10 on the [Programming Chart](#) on page 202. Then scan the [Save](#) bar code. *Default = 0.*



GS1 DataBar Expanded

< Default All GS1 DataBar Expanded Settings >



GS1 DataBar Expanded On/Off



GS1 DataBar Expanded Redundancy

If you are encountering errors when reading GS1 DataBar Expanded bar codes, you may want to adjust the redundancy count. Redundancy adjusts the number of times a bar code is decoded before transmission, which may reduce the number of errors. Note that the higher the redundancy count, the longer it will take to decode the bar code. To adjust the redundancy, scan the **GS1 DataBar Expanded Redundancy** bar code below, then scan a redundancy count between 0 and 10 on the [Programming Chart](#) on page 202. Then scan the [Save](#) bar code. *Default = 0.*



GS1 DataBar Expanded Message Length

Scan the bar codes below to change the message length. Refer to [Message Length Description](#) (page 88) for additional information. Minimum and Maximum lengths = 1-80. Minimum Default = 3, Maximum Default = 80.



Trioptic Code

Trioptic Code is used for labeling magnetic storage media.



GS1 Emulation

The scanner can automatically format the output from any GS1 data carrier to emulate what would be encoded in an equivalent GS1-128 or GS1 DataBar symbol. GS1 data carriers include UPC-A and UPC-E, EAN-13 and EAN-8, ITF-14, GS1-128, and GS1-128 DataBar and GS1 Composites. (Any application that accepts GS1 data can be simplified since it only needs to recognize one data carrier type.)

If **GS1-128 Emulation** is scanned, all retail codes (U.P.C., UPC-E, EAN8, EAN13) are expanded out to 16 digits. If the AIM ID is enabled, the value will be the GS1-128 AIM ID,]C1 (see [Symbology Charts](#) on page 189).

If **GS1 DataBar Emulation** is scanned, all retail codes (U.P.C., UPC-E, EAN8, EAN13) are expanded out to 16 digits. If the AIM ID is enabled, the value will be the GS1-DataBar AIM ID,]em (see [Symbology Charts](#) on page 189).

If **GS1 Code Expansion Off** is scanned, retail code expansion is disabled, and UPC-E expansion is controlled by the [UPC-E0 Expand](#) (page 121) setting. If the AIM ID is enabled, the value will be the GS1-128 AIM ID,]C1 (see [Symbology Charts](#) on page 189).

If **EAN8 to EAN13 Conversion** is scanned, all EAN8 bar codes are converted to EAN13 format. *Default = GS1 Emulation Off.*





EANEMU4.
EAN8 to EAN13 Conversion



EANEMU0.
* GS1 Emulation Off

Postal Codes

The following lists linear postal codes. Any combination of linear postal code selections can be active at a time.

China Post (Hong Kong 2 of 5)

<Default All China Post (Hong Kong 2 of 5) Settings>



CPCDFT.

China Post (Hong Kong 2 of 5) On/Off



CPCENA1.
On



CPCENAD.
* Off

China Post (Hong Kong 2 of 5) Redundancy

If you are encountering errors when reading China Post (Hong Kong 2 of 5) bar codes, you may want to adjust the redundancy count. Redundancy adjusts the number of times a bar code is decoded before transmission, which may reduce the number of errors. Note that the higher the redundancy count, the longer it will take to decode the bar code. To adjust the redundancy, scan the **China Post (Hong Kong 2 of 5) Redundancy** bar code below, then scan a redundancy count between 0 and 10 on the [Programming Chart](#) on page 202. Then scan the [Save](#) bar code. Default = 0.



CPCVOT.
China Post (Hong Kong 2 of
5) Redundancy

China Post (Hong Kong 2 of 5) Message Length

Scan the bar codes below to change the message length. Refer to [Message Length Description](#) (page 88) for additional information. Minimum and Maximum lengths = 1-80. Minimum Default = 3, Maximum Default = 80.



CPCMIN.

Minimum Message Length



CPCMAX.

Maximum Message Length

Add a Test Code I.D. Prefix to All Symbologies

This selection allows you to turn on transmission of a Code I.D. before the decoded symbology. (See the [Symbology Charts](#), beginning on page 189) for the single character code that identifies each symbology.) This action first clears all current prefixes, then programs a Code I.D. prefix for all symbologies. This is a temporary setting that will be removed when the unit is power cycled.



PRECA2,BK2995C80!

**Add Code I.D. Prefix to
All Symbologies (Temporary)**

Show Software Revision

Scan the bar code below to output the current software revision, unit serial number, and other product information for both the scanner and base.



REVINF.

Show Revision

Show Data Format

Scan the bar code below to show current data format settings.



DFMBK3?.

Data Format Settings

Test Menu

When you scan the **Test Menu On** code, then scan a programming code in this manual, the scanner displays the content of a programming code. The programming function will still occur, but in addition, the content of that programming code is output to the terminal.

Note: *This feature should not be used during normal scanner operation.*



EZConfig Cloud for Scanning Introduction

EZConfig Cloud for Scanning provides a wide range of PC-based programming functions that can be performed on a scanner connected to your PC. EZConfig Cloud for Scanning allows you to download upgrades to the scanner's firmware, change programmed parameters, and create and print programming bar codes. Using EZConfig Cloud for Scanning, you can even save/open the programming parameters for a scanner. This saved file can be e-mailed or, if required, you can create a single bar code that contains all the customized programming parameters and mail or fax that bar code to any location. Users in other locations can scan the bar code to load in the customized programming.

EZConfig Cloud for Scanning Operations

The EZConfig Cloud for Scanning software performs the following operations:

Scan Data

Scan Data allows you to scan bar codes and display the bar code data in a window. Scan Data lets you send serial commands to the scanner and receive scanner response that can be seen in the Scan Data window. The data displayed in the Scan Data window can either be saved in a file or printed.

Configure

Configure displays the programming and configuration data of the scanner. The scanner's programming and configuration data is grouped into different categories. Each category is displayed as a tree item under the "Configure" tree node in the application explorer. When one of these tree nodes is clicked, the right-hand

side is loaded with the parameters' form belonging to that particular category. The "Configure" tree option has all the programming and configuration parameters specified for a scanner. You can set or modify these parameters as required. You can later write the modified settings to the scanner, or save them to a dcf file.

Install EZConfig Cloud for Scanning

Use the EZConfig Cloud for Scanning tool to configure your scanner online:

1. Access the Honeywell web site at www.honeywellaidc.com
2. Click on the **Browse Products** tab. Under **Software**, select **Device Management**.
3. Click on **EZConfig Cloud for Scanning**.
4. Scroll to the bottom of the page and click on **Register for free access now** to sign up.

Reset the Factory Defaults



Caution: *This selection erases all your settings and resets the scanner to the original factory defaults. It also disables all plugins.*

If you aren't sure what programming options are in your scanner, or you've changed some options and want to restore the scanner to factory default settings, first scan the **Remove Custom Defaults** bar code, then scan **Activate Defaults**. This resets the scanner to the factory default settings.



DEFOVR.

Remove Custom Defaults



DEFAULT.

Activate Defaults

The [Serial Programming Commands](#), beginning on page 151 list the factory default settings for each of the commands (indicated by an asterisk (*) on the programming pages).

SERIAL PROGRAMMING COMMANDS

The serial programming commands can be used in place of the programming bar codes. Both the serial commands and the programming bar codes will program the scanner. For complete descriptions and examples of each serial programming command, refer to the corresponding programming bar code in this manual.

The device must be set to an RS232 interface (see [page 8](#)). The following commands can be sent via a PC COM port using terminal emulation software.

<i>parameter</i>	A label representing the actual value you should send as part of a command.
<i>[option]</i>	An optional part of a command.
<i>{Data}</i>	Alternatives in a command.
bold	Names of menus, menu commands, buttons, dialog boxes, and windows that appear on the screen.

Menu Command Syntax

Menu commands have the following syntax (spaces have been used for clarity only):

Prefix [:Name:] Tag SubTag {Data} [, SubTag {Data}] [, Tag SubTag {Data}] [...] Storage

Prefix	Three ASCII characters: SYN M CR (ASCII 22,77,13).
:Name:	To send information to the scanner (with the base connected to host), use :Voyager: The default factory setting for a Voyager scanner is Voyager scanner. If the name is not known, a wildcard (*) can be used :*

Note: *Since the base stores all work group settings and transfers to them to scanner once they are linked, changes are typically done to the base and not to the scanner.*

Tag	A 3 character case-insensitive field that identifies the desired menu command group. For example, all RS232 configuration settings are identified with a Tag of 232 .
-----	--

SubTag	A 3 character case-insensitive field that identifies the desired menu command within the tag group. For example, the SubTag for the RS232 baud rate is BAD .
Data	The new value for a menu setting, identified by the Tag and SubTag.
Storage	A single character that specifies the storage table to which the command is applied. An exclamation point (!) performs the command's operation on the device's volatile menu configuration table. A period (.) performs the command's operation on the device's non-volatile menu configuration table. Use the non-volatile table only for semi-permanent changes you want saved through a power cycle.

Query Commands

Several special characters can be used to query the device about its settings.

^	What is the default value for the setting(s).
?	What is the device's current value for the setting(s).
*	What is the range of possible values for the setting(s). (The device's response uses a dash (-) to indicate a continuous range of values. A pipe () separates items in a list of non-continuous values.)

:Name: Field Usage (Optional)

This command returns the query information from the scanner.

Tag Field Usage

When a query is used in place of a Tag field, the query applies to the *entire* set of commands available for the particular storage table indicated by the Storage field of the command. In this case, the SubTag and Data fields should not be used because they are ignored by the device.

SubTag Field Usage

When a query is used in place of a SubTag field, the query applies only to the subset of commands available that match the Tag field. In this case, the Data field should not be used because it is ignored by the device.

Data Field Usage

When a query is used in place of the Data field, the query applies only to the specific command identified by the Tag and SubTag fields.

Concatenation of Multiple Commands

Multiple commands can be issued within one Prefix/Storage sequence. Only the Tag, SubTag, and Data fields must be repeated for each command in the sequence. If additional commands are to be applied to the same Tag, then the new command sequence is separated with a comma (,) and only the SubTag and Data fields of the additional command are issued. If the additional command requires a different Tag field, the command is separated from previous commands by a semicolon (;).

Responses

The device responds to serial commands with one of three responses:

ACK	Indicates a good command which has been processed.
ENQ	Indicates an invalid Tag or SubTag command.
NAK	Indicates the command was good, but the Data field entry was out of the allowable range for this Tag and SubTag combination, e.g., an entry for a minimum message length of 100 when the field will only accept 2 characters.

When responding, the device echoes back the command sequence with the status character inserted directly before each of the punctuation marks (the period, exclamation point, comma, or semicolon) in the command.

Examples of Query Commands

In the following examples, a bracketed notation [] depicts a non-displayable response.

Example: What is the range of possible values for Codabar Coding Enable?

Enter: **cbrena*.**

Response: **CBRENA0-1[ACK]**

This response indicates that Codabar Coding Enable (CBRENA) has a range of values from 0 to 1 (off and on).

Example: What is the default value for Codabar Coding Enable?

Enter: **cbrena^.**

Response: **CBRENA1[ACK]**

This response indicates that the default setting for Codabar Coding Enable (CBRENA) is 1, or on.

Example: What is the device's current setting for Codabar Coding Enable?

Enter: **cbrena?.**

Response: CBRENA1[ACK]

This response indicates that the device's Codabar Coding Enable (CBRENA) is set to 1, or on.

Example: What are the device's settings for all Codabar selections?

Enter: cbr?.

**Response: CBRENA1[ACK],
 SSX0[ACK],
 CK20[ACK],
 CCT1[ACK],
 MIN2[ACK],
 MAX60[ACK],
 DFT[ACK].**

This response indicates that the device's Codabar Coding Enable (CBRENA) is set to 1, or on;
the Start/Stop Character (SSX) is set to 0, or Don't Transmit;
the Check Character (CK2) is set to 0, or Not Required;
concatenation (CCT) is set to 1, or Enabled;
the Minimum Message Length (MIN) is set to 2 characters;
the Maximum Message Length (MAX) is set to 60 characters;
and the Default setting (DFT) has no value.

Trigger Commands

You can activate and deactivate the scanner with serial trigger commands. The trigger is activated and deactivated by sending the following commands:

Activate: **SYN T CR**

Deactivate: **SYN U CR**

The scanner scans until a bar code has been read or until the deactivate command is sent. The scanner can also be set to turn itself off after a specified time has elapsed (see [Read Time-Out](#), which follows).

Read Time-Out

Use this selection to set a time-out (in milliseconds) of the scanner's trigger when using serial commands to trigger the scanner. Once the scanner has timed out, you can activate the scanner either by pressing the trigger or using a serial trigger

command. After scanning the **Read Time-Out** bar code, set the time-out duration (from 0-300,000 milliseconds) by scanning digits on the [Programming Chart](#) on page 202, then scanning [Save](#). *Default = 30,000 ms.*



Reset the Custom Defaults

If you want the custom default settings restored to your scanner, scan the **Activate Custom Defaults** bar code below. This resets the scanner to the custom default settings. If there are no custom defaults, it will reset the scanner to the factory default settings. Any settings that have not been specified through the custom defaults will be defaulted to the factory default settings.



The charts on the following pages list the factory default settings for each of the commands (indicated by an asterisk (*) on the programming pages).

Menu Commands

Selection	Setting * Indicates default	Serial Command # Indicates a numeric entry	Page
Product Default Settings			
Setting Custom Defaults	Set Custom Defaults	MNUCDF	5
	Save Custom Defaults	DEFAULT	5
Resetting the Custom Defaults	Activate Custom Defaults	DEFAULT	6
Program the Interface			
Plug and Play Codes	Keyboard Wedge: IBM PC AT and Compatibles with CR suffix	PAP_AT	7
	IBM PS2 Keyboard	PAPPS2	8
	RS232 Serial Port	PAP232	8
Plug and Play Codes: RS485	IBM Port 5B Interface	PAPP5B	8
	IBM Port 9B HHBCR-1 Interface	PAP9B1	8
	IBM Port 17 Interface	PAPP17	9
	IBM Port 9B HHBCR-2 Interface	PAP9B2	9
OPOS Mode	OPOS Mode	PAPOPS	10
Plug and Play Codes: IBM SurePos	USB IBM SurePos Handheld	PAPSPH	10
	USB IBM SurePos Tabletop	PAPSPT	10
IBM Secondary Interface	* Enable Secondary Interface	REMIFC1	10
	Disable Secondary Interface	REMIFC0	10
Plug and Play Codes: USB	USB Keyboard (PC)	PAP124	11
	USB Keyboard (Mac)	PAP125	11
	USB Japanese Keyboard (PC)	PAP134	11
	USB HID	PAP131	11
HID Fallback Mode	HID Fallback Mode (Range 0-60 *5 minutes)	USBFTO	12

Selection	Setting * Indicates default	Serial Command # Indicates a numeric entry	Page
USB Serial Commands	USB Serial Emulation for Windows XP, Windows Server 2003, and later	PAP130	12
	USB Serial Emulation for Windows 2000	PAP130;REMIFCO	12
	CTS/RTS Emulation On	USBCTS1	12
	CTS/RTS Emulation Off*	USBCTS0	12
	ACK/NAK Mode On	USBACK1	13
	ACK/NAK Mode Off*	USBACK0	13
	Communication Timeout (Range 0-65535) *2000 ms	232DLK#####	13
	Timeout Retries	HSTRTY	13
	Communication Timeout Beeper - Off	HSTTOA0	13
	*Communication Timeout Beeper - On	HSTTOA1	13
	NAK Retries (Range 0-255) *0	HSTRTN###	14
	BEL/CAN Mode On	BELCAN1	14
	BEL/CAN Mode Off*	BELCAN0	14
Plug and Play Codes	Verifone Ruby Terminal	PAPRBY	14
	Gilbarco Terminal	PAPGLB	15
	Honeywell Bioptic Aux Port	PAPBIO	15
	Datalogic Magellan Bioptic Aux Port	PAPMAG	16
	NCR Bioptic Aux Port	PAPNCR	16
	Wincor Nixdorf Terminal	PAPWNX	17
	Wincor Nixdorf Beetle	PAPBTL	17
	Wincor Nixdorf RS232 Mode A	PAPWMA	18
Program Keyboard Country	*U.S.A.	KBDCTY0	18
	Albania	KBDCTY35	18
	Arabic	KBDCTY91	18
	Azeri (Cyrillic)	KBDCTY81	18
	Azeri (Latin)	KBDCTY80	19
	Belarus	KBDCTY82	19
	Belgium	KBDCTY1	19
	Bosnia	KBDCTY33	19
	Brazil	KBDCTY16	19
	Brazil (MS)	KBDCTY59	19

Selection	Setting * Indicates default	Serial Command # Indicates a numeric entry	Page
	Bulgaria (Cyrillic)	KBDCTY52	19
	Bulgaria (Latin)	KBDCTY53	19
	Canada (French legacy)	KBDCTY54	19
	Canada (French)	KBDCTY18	19
	Canada (Multilingual)	KBDCTY55	19
	China	KBDCTY92	19
	Croatia	KBDCTY32	20
	Czech	KBDCTY15	20
	Czech (Programmers)	KBDCTY40	20
	Czech (QWERTY)	KBDCTY39	20
	Czech (QWERTZ)	KBDCTY38	20
	Denmark	KBDCTY8	20
	Dutch (Netherlands)	KBDCTY11	20
	Estonia	KBDCTY41	20
	Faroese	KBDCTY83	20
	Finland	KBDCTY2	20
	France	KBDCTY3	20
	Gaelic	KBDCTY84	20
	Germany	KBDCTY4	21
	Greek	KBDCTY17	21
	Greek (220 Latin)	KBDCTY64	21
	Greek (220)	KBDCTY61	21
	Greek (319 Latin)	KBDCTY65	21
	Greek (319)	KBDCTY62	21
	Greek (Latin)	KBDCTY63	21
	Greek (MS)	KBDCTY66	21
	Greek (Polytonic)	KBDCTY60	21
	Hebrew	KBDCTY12	21
	Hungarian (101 key)	KBDCTY50	21
	Hungary	KBDCTY19	21
	Iceland	KBDCTY75	22
	Irish	KBDCTY73	22
	Italian (142)	KBDCTY56	22
	Italy	KBDCTY5	22
	Japan ASCII	KBDCTY28	22
	Kazakh	KBDCTY78	22
	Korea	KBDCTY93	22

Selection	Setting	Serial Command	Page
	* Indicates default	# Indicates a numeric entry	
	Kyrgyz (Cyrillic)	KBDCTY79	22
	Latin America	KBDCTY14	22
	Latvia	KBDCTY42	22
	Latvia (QWERTY)	KBDCTY43	22
	Lithuania	KBDCTY44	22
	Lithuania (IBM)	KBDCTY45	23
	Macedonia	KBDCTY34	23
	Malta	KBDCTY74	23
	Mongolian (Cyrillic)	KBDCTY86	23
	Norway	KBDCTY9	23
	Poland	KBDCTY20	23
	Polish (214)	KBDCTY57	23
	Polish (Programmers)	KBDCTY58	23
	Portugal	KBDCTY13	23
	Romania	KBDCTY25	23
	Russia	KBDCTY26	23
	Russian (MS)	KBDCTY67	23
	Russian (Typewriter)	KBDCTY68	24
	SCS	KBDCTY21	24
	Serbia (Cyrillic)	KBDCTY37	24
	Serbia (Latin)	KBDCTY36	24
	Slovakia	KBDCTY22	24
	Slovakia (QWERTY)	KBDCTY49	24
	Slovakia (QWERTZ)	KBDCTY48	24
	Slovenia	KBDCTY31	24
	Spain	KBDCTY10	24
	Spanish variation	KBDCTY51	24
	Sweden	KBDCTY23	24
	Switzerland (French)	KBDCTY29	24
	Switzerland (German)	KBDCTY6	25
	Tatar	KBDCTY85	25
	Thailand	KBDCTY94	25
	Turkey F	KBDCTY27	25
	Turkey Q	KBDCTY24	25
	Ukrainian	KBDCTY76	25
	United Kingdom	KBDCTY7	25
	United Stated (Dvorak right)	KBDCTY89	25

Selection	Setting * Indicates default	Serial Command # Indicates a numeric entry	Page
	United States (Dvorak left)	KBDCTY88	25
	United States (Dvorak)	KBDCTY87	25
	United States (International)	KBDCTY30	25
	Uzbek (Cyrillic)	KBDCTY77	25
	Vietnam	KBDCTY95	26
Keyboard Wedge Modifiers			
ALT Mode	*Off	KBDALT0	26
	3 Characters	KBDALT6	26
	4 Characters	KBDALT7	26
Keyboard Style	*Regular	KBDSTY0	26
	Caps Lock	KBDSTY1	27
	Shift Lock	KBDSTY2	27
	Autocaps via NumLock	KBDSTY7	27
	Emulate External Keyboard	KBDSTY5	27
Keyboard Conversion	*Keyboard Conversion Off	KBDCNV0	27
	Convert all Characters to Upper Case	KBDCNV1	27
	Convert all Characters to Lower Case	KBDCNV1	28
Keyboard Modifiers	*Control + ASCII Off	KBDCAS0	28
	DOS Mode Control + ASCII	KBDCAS1	28
	Windows Mode Control + ASCII	KBDCAS2	28
	Windows Mode Prefix/Suffix Off	KBDCAS3	28
	*Numeric Keypad Off	KBDNPS0	29
	Numeric Keypad On	KBDNPS1	28
Inter-Scan Code Delay	Inter-Scan Code Delay *0 (Range 1-30 msec)	KBDDL#	29
<F0> Break Character	Suppress <F0> Break Character	KBDF0B0	29
	*Transmit <F0> Break Character	KBDF0B1	29
Keyboard Wedge Defaults	Reset Keyboard Wedge Defaults	KBDDFT	29

Selection	Setting * Indicates default	Serial Command # Indicates a numeric entry	Page
RS-232 Modifiers			
RS232 Baud Rate	300 BPS	232BAD0	30
	600 BPS	232BAD1	30
	1200 BPS	232BAD2	30
	2400 BPS	232BAD3	30
	4800 BPS	232BAD4	30
	*9600 BPS	232BAD5	30
	19200 BPS	232BAD6	30
	38400 BPS	232BAD7	30
	57600 BPS	232BAD8	30
	115200 BPS	232BAD9	31
Word Length: Data Bits, Stop Bits, and Parity	7 Data, 1 Stop, Parity Even	232WRD3	31
	7 Data, 1 Stop, Parity None	232WRD0	31
	7 Data, 1 Stop, Parity Odd	232WRD6	31
	7 Data, 2 Stop, Parity Even	232WRD4	31
	7 Data, 2 Stop, Parity None	232WRD1	31
	7 Data, 2 Stop, Parity Odd	232WRD7	31
	8 Data, 1 Stop, Parity Even	232WRD5	31
	*8 Data, 1 Stop, Parity None	232WRD2	32
	8 Data, 1 Stop, Parity Odd	232WRD8	32
	7 Data, 1 Stop, Parity Space	232WRD9	32
	7 Data, 2 Stop, Parity Space	232WRD10	32
	8 Data, 1 Stop, Parity Space	232WRD11	32
	7 Data, 1 Stop, Parity Mark	232WRD12	32
	7 Data, 2 Stop, Parity Mark	232WRD13	32
	8 Data, 1 Stop, Parity Mark	232WRD14	32

Selection	Setting * Indicates default	Serial Command # Indicates a numeric entry	Page
RS232 Handshaking	*RTS/CTS Off	232CTS0	33
	Flow Control, No Timeout	232CTS1	33
	Character-Based Flow Control, No Timeout	232CTS7	33
	Two-Direction Flow Control	232CTS2	33
	Flow Control with Timeout	232CTS3	33
	Character-Based Flow Control with Timeout	232CTS9	33
	RS232 Timeout (Range 1-5100) *1000 ms	232DEL####	33
	*XON/XOFF Off	232XON0	34
	XON/XOFF On	232XON1	34
	*ACK/NAK Off	232ACK0	34
	ACK/NAK On	232ACK1	34
	Communication Timeout (Range 1-65535) *2000 ms	232DLK#####	34
	Communication Timeout Beeper - Off	HSTTOA0	35
	*Communication Timeout Beeper - On	HSTTOA1	35
	BEL/CAN Mode On	BELCAN1	35
	*BEL/CAN Mode Off	BELCAN0	36
RS232 Defaults	Reset RS232 Defaults	232DFT	36
NCR Modifiers			
NCR ACK/NAK	*NCR ACK/NAK Off	NCRACK0	36
	NCR ACK/NAK On	NCRACK1	36
Block Check Character	*Transmit	NCRBCC1	36
	Don't Transmit	NCRBCC0	37
NCR Prefix/Suffix	NCR Prefix	NCRPR2##	37
	NCR Suffix	NCRSF2##	37
	Transmit Prefix/Suffix	NCRBCP1	37
	*Don't Transmit Prefix/Suffix	NCRBCP0	37
NCR NOF (Not-on-File) Error	On	NCRRAZ1	38
	*Off	NCRRAZ0	38
Scanner to Bioptic Communication	*Packet Mode Off	232PKT0	38
	Packet Mode On	232PKT2	38
	*ACK/NAK Off	232ACK0	39
	ACK/NAK On	232ACK1	39
	Communication Timeout (Range 1-65535) *2000 ms	232DLK#####	39

Selection	Setting * Indicates default	Serial Command # Indicates a numeric entry	Page
Input/Output Selections			
Power Up Beeper	Power Up Beeper Off - Scanner	BEPPWR0	41
	*Power Up Beeper On - Scanner	BEPPWR1	41
Beep on BEL Character	Beep on BEL On	BELBEP1	41
	*Beep on BEL Off	BELBEP0	41
Beeper - Good Read	Off	BEPBEP0	42
	*On	BEPBEP1	42
Beeper Volume - Good Read	Off	BEPLVL0	42
	Low	BEPLVL1	42
	Medium	BEPLVL2	42
	*High	BEPLVL3	42
Beeper Pitch - Good Read (Frequency)	Low (1600 Hz)	BEPFQ11600	42
	*Medium (2350 Hz)	BEPFQ12350	43
	High (4200 Hz)	BEPFQ14200	43
Beeper - Transmit Order	*Before Transmission	BEPWHN1	43
	After Transmission	BEPWHN2	43
Beeper Pitch - Error (Frequency)	*Razz (100 Hz)	BEPFQ2100	43
	Medium (2000 Hz)	BEPFQ22000	43
	High (4200 Hz)	BEPFQ24200	43
Beeper Duration - Good Read	*Normal Beep	BEPBIP0	44
	Short Beep	BEPBIP1	44
Number of Beeps - Good Read	Range 1 - 9 (*1)	BEPRPT#	44
Number of Beeps - Error	Range 1 - 9 (*1)	BEPERR#	44
LED Settings	*Red LED Off	LEDFN10	45
	Green LED Off	LEDFN20	45
	Red LED On with Good Scan	LEDFN11	45
	*Green LED On with Good Scan	LEDFN21	45
	Red LED On with Laser	LEDFN12	45
	Green LED On with Laser	LEDFN22	45
	Red LED On when CodeGate Disabled	LEDFN14	45
	Green LED On when CodeGate Disabled	LEDFN24	45
	Red LED On when In-Stand	LEDFN18	45
	Green LED On when In-Stand	LEDFN28	45
	Red LED On with CTS	LEDFN1128	45
	Green LED On with CTS	LEDFN2128	46

Selection	Setting * Indicates default	Serial Command # Indicates a numeric entry	Page
LED Brightness	Red Off	LEDIN10	46
	Green Off	LEDIN20	46
	Red Low	LEDIN11	46
	Green Low	LEDIN21	46
	Red Medium	LEDIN12	46
	Green Medium	LEDIN22	46
	*Red High	LEDIN13	46
	*Green High	LEDIN23	46
In-Stand and Out-of-Stand Settings	In-Stand Defaults	AISDFT	47
	Out-of-Stand Defaults	AOSDFT	47
	Presentation Mode Out-of-Stand	PAPPM1	47
	Presentation Mode with CodeGate Out-of-Stand	PAPPM2	48
	Manual Activation Mode Off In-Stand	AISMEN0	48
	*Manual Activation Mode On In-Stand	AISMEN1	48
	Manual Activation Mode Off Out-of-Stand	AOSMEN0	48
	*Manual Activation Mode On Out-of-Stand	AOSMEN1	48
	Do Not End Manual Activation After Good Read In-Stand	AISMGD0	48
	*End Manual Activation After Good Read In-Stand	AISMGD1	48
	Do Not End Manual Activation After Good Read Out-of-Stand	AOSMGD0	49
	*End Manual Activation After Good Read Out-of-Stand	AOSMGD1	49
	Laser Timeout - Trigger Hold In-Stand (Range 1 - 65525) *5000 ms	AISMPT#####	49

Selection	Setting * Indicates default	Serial Command # Indicates a numeric entry	Page
In-Stand and Out-of-Stand Settings (continued)	Laser Timeout - Trigger Release In-Stand (Range 1 - 65525) *0 ms	AISMRT#####	49
	Laser Timeout - Trigger Hold Out-of-Stand (Range 1 - 65525) *30000 ms	AOSMPT#####	49
	Laser Timeout - Trigger Release Out-of-Stand (Range 1 - 65525) *0 ms	AOSMRT#####	49
	*CodeGate Off In-Stand	AISCGD0	50
	CodeGate On In-Stand	AISCGD1	50
	CodeGate Off Out-of-Stand	AOSCGD0	50
	*CodeGate On Out-of-Stand	AOSCGD1	50
	Object Detection Mode Off In-Stand	AISOEN0	50
	Object Detection Mode On Out-of-Stand	AOSOEN1	51
	*Object Detection Mode Off Out-of-Stand	AOSOEN0	50
	*Object Detection Mode On In-Stand	AISOEN1	50
	Do Not End Object Detection After Good Read In-Stand	AISOGD0	51
In-Stand and Out-of-Stand Settings (continued)	*End Object Detection After Good Read In-Stand	AISOGD1	51
	Do Not End Object Detection After Good Read Out-of-Stand	AOSOGD0	51
	*End Object Detection After Good Read Out-of-Stand	AOSOGD1	51
	Object Detection Laser Timeout In-Stand (Range 1 - 65525) *5000 ms	AISODT#####	51
	Object Detection Laser Timeout Out-of-Stand (Range 1 - 65525) *5000 ms	AOSODT#####	52
	*Object Detection Distance - Short In-Stand	AISRNG2	52
	Object Detection Distance - Long In-Stand	AISRNG1	52
	Object Detection Distance - Short Out-of-Stand	AOSRNG2	52
	*Object Detection Distance - Long Out-of-Stand	AOSRNG1	52

Selection	Setting * Indicates default	Serial Command # Indicates a numeric entry	Page
Character Activation Mode	*Off	HSTCEN0	52
	On	HSTCEN1	53
	Activation Character	HSTACH##	53
	Do Not End Character Activation After Good Read	HSTCGD0	53
	*End Character Activation After Good Read	HSTCGD1	53
	Character Activation Laser Timeout (Range 1 - 65525) *5000 ms	HSTCDT#####	53
Character Deactivation Mode	*Off	HSTDEN0	54
	On	HSTDEN1	54
	Deactivation Character	HSTDCH##	54
Reread Delay	Short (500 ms)	DLYRRD500	54
	*Medium (750 ms)	DLYRRD750	54
	Long (1000 ms)	DLYRRD1000	55
	Extra Long (2000 ms)	DLYRRD2000	54
User-Specified Reread Delay	Range 0 - 30,000 ms	DLYRRD#####	55
Output Sequence Editor	Enter Sequence	SEQBLK	58
	Default Sequence	SEQDFT	58
Sequence Timeout	(Range 1 - 65535) *5000 ms	SEQDLY#####	58
Sequence Match Beeper	*On	SEQBEP1	58
	Off	SEQBEP0	58
Partial Sequence	Transmit Partial Sequence	SEQTTS1	59
	*Discard Partial Sequence	SEQTTS0	59
Require Output Sequence	Required	SEQ_EN2	59
	On/Not Required	SEQ_EN1	59
	*Off	SEQ_EN0	59
No Read	On	SHWNRD1	59
	*Off	SHWNRD0	60
Prefix/Suffix Selections			
Add CR Suffix to All Symbolologies		VSUF CR	63
Prefix	Add Prefix	PREBK2##	63
	Clear One Prefix	PRECL2	63
	Clear All Prefixes	PRECA2	63
Suffix	Add Suffix	SUFBK2##	63
	Clear One Suffix	SUFCL2	63
	Clear All Suffixes	SUFCA2	63

Selection	Setting * Indicates default	Serial Command # Indicates a numeric entry	Page
Transmit Alternate Extended ASCII Characters	*Transmit Alternate Extended ASCII	KBDEXT0	64
	Transmit Normal Extended ASCII	KBDEXT1	64
Function Code Transmit	*Enable	RMVFNC0	65
	Disable	RMVFNC1	65
Communication Check Character	*None	HSTXRC0	66
	LRC Starts on 1st Character	HSTXRC1	66
	LRC Starts on 2nd Character	HSTXRC2	66
	CRC	HSTXRC3	66
Intercharacter Delay	Range 0 - 1000 (5ms increments)	DLYCHR##	67
User Specified Intercharacter Delay	Delay Length 0 - 1000 (5ms increments)	DLYCRX##	67
	Character to Trigger Delay	DLY_XX##	67
Interfunction Delay	Range 0 - 1000 (5ms increments)	DLYFNC##	68
Intermessage Delay	Range 0 - 1000 (5ms increments)	DLYMSG##	68
Data Formatter Selections			
Data Format Editor	*Default Data Format (None)	DFMDF3	70
	Enter Data Format	DFMBK3##	71
	Clear One Data Format	DFMCL3	71
	Clear All Data Formats	DFMCA3	71
Data Formatter	Data Formatter Off	DFM_EN0	82
	*Data Formatter On, Not Required, Keep Prefix/Suffix	DFM_EN1	83
	Data Format Required, Keep Prefix/Suffix	DFM_EN2	83
	Data Formatter On, Not Required, Drop Prefix/Suffix	DFM_EN3	83
	Data Format Required, Drop Prefix/Suffix	DFM_EN4	83
Data Format Non-Match Error Tone	*Data Format Non-Match Error Tone On	DFMDEC0	84
	Data Format Non-Match Error Tone Off	DFMDEC1	84
Primary/Alternate Data Formats	Primary Data Format	ALTFNM0	84
	Data Format 1	ALTFNM1	84
	Data Format 2	ALTFNM2	84
	Data Format 3	ALTFNM3	84

Selection	Setting * Indicates default	Serial Command # Indicates a numeric entry	Page
Single Scan Data Format Change	Single Scan-Primary Data Format	VSAF_0	85
	Single Scan-Data Format 1	VSAF_1	85
	Single Scan-Data Format 2	VSAF_2	85
	Single Scan-Data Format 3	VSAF_3	85
Symbologies			
All Symbologies	All Symbologies Off	ALLENAO	88
Codabar	Default All Codabar Settings	CBRDFT	88
	Off	CBRENA0	89
	*On	CBRENA1	88
Codabar Start/Stop Char.	*Don't Transmit	CBRSSX0	89
	Transmit	CBRSSX1	89
Codabar Check Char.	*No Check Char.	CBRCK20	89
	Validate Modulo 16, But Don't Transmit	CBRCK21	89
	Validate Modulo 16, and Transmit	CBRCK22	89
	Validate Modulo 7 CD, But Don't Transmit	CBRCK23	90
	Validate Modulo 7 CD, and Transmit	CBRCK24	90
	Validate CLSI, But Don't Transmit	CBRCK25	90
	Validate CLSI, and Transmit	CBRCK26	90
Codabar Concatenation	*Off	CBRCCT0	90
	On	CBRCCT1	90
	Require	CBRCCT2	90
	Concatenation Timeout	DLYCCT	91
Codabar Redundancy	Range (0 - 10) *0	CBRVOT##	91
Codabar Message Length	Minimum (1 - 80) *3	CBRMIN##	91
	Maximum (1 - 80) *80	CBRMAX##	91
Code 39	Default All Code 39 Settings	C39DFT	92
	Off	C39ENA0	92
	*On	C39ENA1	92
Code 39 Start/Stop Char.	*Don't Transmit	C39SSX0	92
	Transmit	C39SSX1	92

Selection	Setting * Indicates default	Serial Command # Indicates a numeric entry	Page
Code 39 Check Char.	*No Check Char.	C39CK20	93
	Validate, But Don't Transmit	C39CK21	93
	Validate, and Transmit	C39CK22	93
Code 39 Redundancy	Range (0 - 10) *0	C39VOT##	93
Code 39 Message Length	Minimum (1 - 80) *3	C39MIN##	93
	Maximum (1 - 80) *80	C39MAX##	93
Code 32 Pharmaceutical (PARAF)	*Off	C39B320	94
	On	C39B321	94
Code 39 Full ASCII	*Off	C39ASC0	94
	On	C39ASC1	94
Interleaved 2 of 5	Default All Interleaved 2 of 5 Settings	I25DFT	95
	Off	I25ENAO	95
	*On	I25ENA1	95
NULL Characters	*Off	I25NULO	95
	On	I25NUL1	95
Interleaved 2 of 5 Check Digit	*No Check Char.	I25CK20	96
	Validate, But Don't Transmit	I25CK21	96
	Validate, and Transmit	I25CK22	96
Interleaved 2 of 5 Redundancy	Range (0 - 10) *0	I25VOT##	96
Interleaved 2 of 5 Message Length	Minimum (1 - 80) *6	I25MIN##	96
	Maximum (1 - 80) *80	I25MAX##	96
NEC 2 of 5	Default All NEC 2 of 5 Settings	N25DFT	97
	*Off	N25ENAO	97
	On	N25ENA1	97
NEC 2 of 5 Check Digit	*No Check Char.	N25CK20	97
	Validate, But Don't Transmit	N25CK21	97
	Validate, and Transmit	N25CK22	97
NEC 2 of 5 Redundancy	Range (0 - 10) *0	N25VOT##	98
NEC 2 of 5 Message Length	Minimum (1 - 80) *3	N25MIN##	98
	Maximum (1 - 80) *80	N25MAX##	98
Code 93	Default All Code 93 Settings	C93DFT	98
	Off	C93ENAO	98
	*On	C93ENA1	99

Selection	Setting * Indicates default	Serial Command # Indicates a numeric entry	Page
Code 93 Redundancy	Range (0 - 10) *0	C93VOT##	99
Code 93 Message Length	Minimum (1 - 80) *3	C93MIN##	99
	Maximum (1 - 80) *80	C93MAX##	99
Straight 2 of 5 Industrial	Default All Straight 2 of 5 Industrial Settings	R25DFT	99
	*Off	R25ENAO	99
	On	R25ENA1	99
Straight 2 of 5 Industrial Redundancy	Range (0 - 10) *0	R25VOT##	100
Straight 2 of 5 Industrial Message Length	Minimum (1 - 80) *3	R25MIN##	100
	Maximum (1 - 80) *80	R25MAX##	100
Straight 2 of 5 IATA	Default All Straight 2 of 5 IATA Settings	A25DFT	100
Straight 2 of 5 IATA	*Off	A25ENAO	101
	On	A25ENA1	101
Straight 2 of 5 IATA Redundancy	Range (0 - 10) *0	A25VOT##	101
Straight 2 of 5 IATA Message Length	Minimum (1 - 80) *13	A25MIN##	101
	Maximum (1 - 80) *15	A25MAX##	101
Matrix 2 of 5	Default All Matrix 2 of 5 Settings	X25DFT	102
	*Off	X25ENAO	102
	On	X25ENA1	102
Matrix 2 of 5 Redundancy	Range (0 - 10) *0	X25VOT##	103
Matrix 2 of 5 Message Length	Minimum (1 - 80) *3	X25MIN##	103
	Maximum (1 - 80) *80	X25MAX##	103
Matrix 2 of 5 Check Char.	*No Check Char.	X25CK20	102
	Validate, But Don't Transmit	X25CK21	102
	Validate and Transmit	X25CK22	102
Code 11	Default All Code 11 Settings	C11DFT	103
	*Off	C11ENAO	103
	On	C11ENA1	103
Code 11 Check Digits Required	1 Check Digit Required	C11CK20	104
	*2 Check Digits Required	C11CK21	104
	Auto Select Check Digits Required	C11CK22	104

Selection	Setting * Indicates default	Serial Command # Indicates a numeric entry	Page
Check Digit Validation	Validate and Transmit One Check Digit	C11CK23	104
	Validate and Transmit Two Check Digits	C11CK24	104
	Validate and Transmit Auto Select Check Digits	C11CK25	104
Code 11 Redundancy	Range (0 - 10) *0	C11VOT##	105
Code 11 Message Length	Minimum (1 - 80) *3	C11MIN##	105
	Maximum (1 - 80) *80	C11MAX##	105
Code 128	Default All Code 128 Settings	128DFT	105
	Off	128ENAO	105
	*On	128ENA1	105
128 Group Separator Output	*Off	128GSEO	106
	On	128GSE1	106
Code 128 Redundancy	Range (0 - 10) *0	128VOT##	106
Code 128 Message Length	Minimum (1 - 80) *1	128MIN##	106
	Maximum (1 - 80) *80	128MAX##	106
ISBT 128	*Off	ISBENAO	107
	On	ISBENA1	107
	Concatenation Timeout	DLYCCT	107
ISBT128 Predefined Concatenation Sequences	* Donation ID Number (001) and ABO/RhD Blood Groups (002)	ISBPCS0	107
	Donation ID Number (001) and Donor ID Number (019)	ISBPCS1	107
	Donation ID Number (001) and Confidential Unit Exclusion Status	ISBPCS2	108
	Product Code (003) and Expiration Date (Form 1)	ISBPCS3	108
	Product Code (003) and Expiration Date (Form 2)	ISBPCS4	108
	Product Code (003) and Expiration Date (Form 3)	ISBPCS5	108
	Product Code (003) and Expiration Date (Form 4)	ISBPCS6	108
ISBT 128 Predefined Concatenation Sequences On/Off	*Off	ISBPCE0	108
	Allow Predefined Sequence	ISBPCE1	108
	Require Predefined Sequence	ISBPCE2	109

Selection	Setting * Indicates default	Serial Command # Indicates a numeric entry	Page
ISBT 128 User-Defined Concatenation Sequences	1st Left Identifier (0-255) *0	ISBUL1##	109
	2nd Left Identifier (0-255) *0	ISBUL2##	110
	1st Right Identifier (0-255) *0	ISBUR1##	110
	2nd Right Identifier (0-255) *0	ISBUR2##	110
ISBT 128 User-Defined Concatenation Sequences On/Off	*Off	ISBUCE0	110
	Allow User-Defined Sequence	ISBUCE1	110
	Require User-Defined Sequence	ISBUCE2	110
Content Verification	*Off	ISBXM00	111
	On	ISBXM01	111
Transmit Identifiers	Off	ISBXM10	111
	*On	ISBXM11	111
Flag Conversion	*Off	ISBXM20	111
	On	ISBXM21	111
GS1-128	Default All GS1-128 Settings	GS1DFT	112
	*On	GS1ENA1	112
	Off	GS1ENAO	112
GS1-128 Application Identifier Parsing	*Off	GS1EMU0	112
	Transmit Without Identifiers	GS1EMU1	112
	Transmit With Identifiers	GS1EMU2	112
GS1-128 Redundancy	Range (0 - 10) *0	GS1VOT##	113
GS1-128 Message Length	Minimum (1 - 80) *3	GS1MIN	113
	Maximum (0 - 80) *80	GS1MAX	113
Telepen	Default All Telepen Settings	TELDFT	113
	*Off	TELENA0	113
	On	TELENA1	113
Telepen Output	*AIM Telepen Output	TELOLD0	114
	Original Telepen Output	TELOLD1	114
Telepen Redundancy	Range (0 - 10) *0	TELVOT##	114
Telepen Message Length	Minimum (1 - 80) *3	TELMIN##	114
	Maximum (1 - 80) *80	TELMAX##	114
UPC-A	Default All UPC-A Settings	UPADFT	115
	Off	UPBENA0	116
	*On	UPBENA1	116
UPC-A Number System	Off	UPANSX0	115
	*On	UPANSX1	115

Selection	Setting * Indicates default	Serial Command # Indicates a numeric entry	Page
UPC-A Check Digit	Off	UPACKX0	115
	*On	UPACKX1	116
UPC-A 2 Digit Addenda	*Off	UPAAD20	116
	On	UPAAD21	116
UPC-A 5 Digit Addenda	*Off	UPAAD50	116
	On	UPAAD51	116
UPC-A Addenda Required	*Not Required	UPAARQ0	116
	Required	UPAARQ1	116
Addenda Timeout	Range (0 - 65535) *100	DLYADD#####	117
UPC-A Addenda Separator	*Off	UPAADS0	117
	On	UPAADS1	117
UPC-A Redundancy	Range (0 - 10) *0	UPAVOT##	117
UPC-A/EAN-13 with Extended Coupon Code	*Off	CPNENA0	118
	Allow Concatenation	CPNENA1	118
	Require Concatenation	CPNENA2	118
UPC-A Number System 4 Addenda Required	* Don't Require Coupon Code	ARQSY40	118
	Require Coupon Code	ARQSY41	118
UPC-A Number System 5 Addenda Required	* Don't Require Coupon Code/ Addenda	ARQSY50	119
	Require 2 Digit Addenda	ARQSY51	119
	Require 5 Digit Addenda	ARQSY52	119
	Require 2 or 5 Digit Addenda	ARQSY53	119
	Require Coupon Code	ARQSY54	119
	Require Coupon Code or 2 Digit Addenda	ARQSY55	119
	Require Coupon Code or 5 Digit Addenda	ARQSY56	119
	Require Coupon Code, 2 Digit Addenda, or 5 Digit Addenda	ARQSY57	120
Addenda Timeout	Range (0 - 65535) *100	DLYADD#####	120
UPC-E0	Default All UPC-E Settings	UPEDFT	120
	Off	UPEEN00	120
	*On	UPEEN01	120
UPC-E0 Expand	*Off	UPEEXP0	121
	On	UPEEXP1	121
UPC-E0 Number System	*On	UPEEXN1	121
	Off	UPEEXN0	121

Selection	Setting * Indicates default	Serial Command # Indicates a numeric entry	Page
UPC-E0 Check Digit	*Off	UPECKX0	122
	On	UPECKX1	121
UPC-E0 Leading Zero	*Off	UPENSX0	122
	On	UPENSX1	122
UPC-E0 Addenda	2 Digit Addenda On	UPEAD21	122
	*2 Digit Addenda Off	UPEAD20	122
	5 Digit Addenda On	UPEAD51	122
	*5 Digit Addenda Off	UPEAD50	122
UPC-E0 Addenda Required	Required	UPEARQ1	123
	*Not Required	UPEARQ0	123
Addenda Timeout	Range (0 - 65535) *100	DLYADD#####	123
UPC-E0 Addenda Separator	On	UPEADS1	123
	*Off	UPEADS0	123
UPC-E0 Redundancy	Range (0 - 10) *1	UPEVOT##	124
EAN/JAN-13	Default All EAN/ JAN Settings	E13DFT	124
	Off	E13ENAO	124
	*On	E13ENA1	124
Convert UPC-A to EAN-13	Convert UPC-A to EAN-13	UPAENAO	124
	*Do Not Convert UPC-A	UPAENA1	124
EAN/JAN-13 Check Digit	Off	E13CKX0	125
	*On	E13CKX1	125
EAN/JAN-13 2 Digit Addenda	2 Digit Addenda On	E13AD21	125
	*2 Digit Addenda Off	E13AD20	125
	5 Digit Addenda On	E13AD51	125
	*5 Digit Addenda Off	E13AD50	125
EAN/JAN-13 Addenda Required	*Not Required	E13ARQ0	125
	Required	E13ARQ1	125
EAN-13 Beginning with 2 Addenda Required	* Don't Require 2 Digit Addenda	ARQSY20	126
	Require 2 Digit Addenda	ARQSY21	127
EAN-13 Beginning with 290 Addenda Required	* Don't Require 5 Digit Addenda	ARQ2900	126
	Require 5 Digit Addenda	ARQ2901	127
EAN-13 Beginning with 378/379 Addenda Required	* Don't Require Addenda	ARQ3780	127
	Require 2 Digit Addenda	ARQ3781	127
	Require 5 Digit Addenda	ARQ3782	127
	Require 2 or 5 Digit Addenda	ARQ3783	127

Selection	Setting * Indicates default	Serial Command # Indicates a numeric entry	Page
EAN-13 Beginning with 414/419 Addenda Required	* Don't Require Addenda	ARQ4140	128
	Require 2 Digit Addenda	ARQ4141	128
	Require 5 Digit Addenda	ARQ4142	128
	Require 2 or 5 Digit Addenda	ARQ4143	128
EAN-13 Beginning with 434/439 Addenda Required	* Don't Require Addenda	ARQ4340	128
	Require 2 Digit Addenda	ARQ4341	129
	Require 5 Digit Addenda	ARQ4342	129
	Require 2 or 5 Digit Addenda	ARQ4343	129
EAN-13 Beginning with 977 Addenda Required	* Don't Require 2 Digit Addenda	ARQ9770	129
	Require 2 Digit Addenda	ARQ9771	129
EAN-13 Beginning with 978 Addenda Required	* Don't Require 5 Digit Addenda	ARQ9780	130
	Require 5 Digit Addenda	ARQ9781	130
EAN-13 Beginning with 979 Addenda Required	* Don't Require 5 Digit Addenda	ARQ9790	130
	Require 5 Digit Addenda	ARQ9791	130
Addenda Timeout	Range (0 - 65535) *100	DLYADD#####	131
EAN/JAN-13 Addenda Separator	*Off	E13ADSO	131
	On	E13ADS1	132
EAN/JAN-13 Redundancy	Range (0 - 10) *0	E13VOT##	131
ISBN Translate	*Off	E13ISB0	132
	On	E13ISB1	132
	Convert to 13-Digit On	E13I131	132
	*Convert to 13-Digit Off	E13I130	132
	Reformat On	E13IBR1	132
	*Reformat Off	E13IBR0	132
ISSN Translate	*Off	E13ISS0	133
	On	E13ISS1	133
	Reformat On	E13ISR1	133
	*Reformat Off	E13ISRO	133
EAN/JAN-8	Default All EAN/JAN 8 Settings	EA8DFT	133
	Off	EA8ENAO	134
	*On	EA8ENA1	133
EAN/JAN-8 Check Digit	Off	EA8CKX0	134
	*On	EA8CKX1	133
EAN/JAN-8 Addenda	*2 Digit Addenda Off	EA8AD20	134
	2 Digit Addenda On	EA8AD21	134
	*5 Digit Addenda Off	EA8AD50	134
	5 Digit Addenda On	EA8AD51	134

Selection	Setting * Indicates default	Serial Command # Indicates a numeric entry	Page
EAN/JAN-8 Addenda Required	*Not Required	EA8ARQ0	135
	Required	EA8ARQ1	135
Addenda Timeout	Range (0 - 65535) *100	DLYADD#####	135
EAN/JAN-8 Addenda Separator	*Off	EA8ADS0	135
	On	EA8ADS1	135
EAN/JAN-8 Redundancy	Range (0 - 10) *0	EA8VOT##	136
MSI	Default All MSI Settings	MSIDFT	136
	*Off	MSIENAO	136
	On	MSIENA1	136
MSI Check Character	*Validate Type 10, but Don't Transmit	MSICK0	136
	Validate Type 10 and Transmit	MSICK1	137
	Validate 2 Type 10 Chars, but Don't Transmit	MSICK2	137
	Validate 2 Type 10 Chars and Transmit	MSICK3	137
	Validate Type 11 then Type 10 Char, but Don't Transmit	MSICK4	137
	Validate Type 11 then Type 10 Char and Transmit	MSICK5	137
	Disable MSI Check Characters	MSICK6	137
MSI Redundancy	Range (0 - 10) *0	MSIVOT##	137
MSI Message Length	Minimum (1 - 80) *3	MSIMIN##	138
	Maximum (1 - 80) *80	MSIMAX##	138
Plessey Code	Default All Plessey Code Settings	PLSDFT	138
	Off	PLSENA0	138
	*On	PLSENA1	138
Plessey Check Char.	*No Check Char.	PLSCHK0	139
	Validate, But Don't Transmit	PLSCHK1	139
	Validate, and Transmit	PLSCHK2	139
Plessey Redundancy	Range (0 - 10) *0	PLSVOT##	139
Plessey Message Length	Minimum (1 - 80) *3	PLSMIN##	139
	Maximum (1 - 80) *80	PLSMAX##	139

Selection	Setting * Indicates default	Serial Command # Indicates a numeric entry	Page
GS1 DataBar Omnidirectional	Default All GS1 DataBar Omnidirectional Settings	RSSDFT	140
	Off	RSENA0	140
	*On	RSENA1	140
GS1 DataBar Omnidirectional Redundancy	Range (0 - 10) *0	RSSVOT##	140
GS1 DataBar Limited	Default All GS1 DataBar Limited Settings	RSLDFT	141
	Off	RSENA0	141
	*On	RSENA1	141
GS1 DataBar Limited Redundancy	Range (0 - 10) *0	RSLVOT##	141
GS1 DataBar Expanded	Default All GS1 DataBar Expanded Settings	RSEDFT	142
	Off	RSEENA0	142
	*On	RSEENA1	142
GS1 DataBar Expanded Redundancy	Range (0 - 10) *0	RSEVOT##	142
GS1 DataBar Expanded Msg. Length	Minimum (1 - 80) *3	RSEMIN##	142
	Maximum (1 - 80) *80	RSEMAX##	142
Trioptic Code	*Off	TRIENA0	143
	On	TRIENA1	143
GS1 Emulation	GS1-128 Emulation	EANEMU1	143
	GS1 DataBar Emulation	EANEMU2	143
	GS1 Code Expansion Off	EANEMU3	143
	EAN8 to EAN13 Conversion	EANEMU4	144
	*GS1 Emulation Off	EANEMU0	144
Postal Codes			
China Post (Hong Kong 2 of 5)	Default All China Post (Hong Kong 2 of 5) Settings	CPCDFT	144
	*Off	CPCENA0	144
	On	CPCENA1	144
China Post (Hong Kong 2 of 5) Redundancy	Range (0 - 10) *0	CPCVOT##	144
China Post (Hong Kong 2 of 5) Msg. Length	Minimum (1 - 80) *3	CPCMIN##	145
	Maximum (1 - 80) *80	CPCMAX##	145
Utilities			
Add Code I.D. Prefix to All Symbolologies (Temporary)		PRECA2,BK2995C80!	147
Show Software Revision		REVINF	147

Selection	Setting * Indicates default	Serial Command # Indicates a numeric entry	Page
Show Data Format		DFMBK3?	147
Test Menu	On	TSTMNU1	148
	*Off	TSTMNU0	148
Resetting the Factory Defaults	Remove Custom Defaults	DEFOVR	149
	Activate Defaults	DEFALT	149
Trigger Commands			
Read Time-Out	0 - 300,000 *30,000 ms	TRGSTO####	154

Voyager 1250g Scanner Product Specifications

Parameter	Specification
Mechanical	
Height	6.63 in. (168mm)
Length	3.22 in. (88mm)
Width	2.45 in. (62mm)
Weight	4.69 oz. (133g)
Electrical	
Input Voltage	5V $\pm$ 5%
Operating Power	700mW; 140 mA (typical) @ 5V
Standby Power	425mW; 85 mA (typical) @ 5V
Environmental	
Operating Temperature	32°F to 104°F (0°C to 40°C)
Storage Temperature	-4°F to 140°F (-20°C to 60°C)
Humidity	5 to 95% non-condensing
Drop	Operational after 30 drops to concrete from 5 ft. (1.5m)
Environmental Sealing	IP40
Light Immunity	75,000 lux (direct sunlight)
ESD	15kV Air, 8kV contact
Scan Performance	
Scan Pattern	Single scan line
Scan Angle	Horizontal: 30°
Scan Speed	100 scan lines per second
Print Contrast	20% minimum reflectance difference
Pitch, Skew	60°, 60°
Decode Capabilities	Reads standard 1D and GS1 DataBar symbologies

Depth of Field

Typical Performance

Bar code	Standard Range
5.0 mil	57 mm - 139 mm (2.2" - 5.5")
7.5 mil	28 mm - 245 mm (1.1" - 9.7")
10.4 mil	9 mm - 369 mm (0.4" - 14.5")
13 mil	0 mm - 446 mm (0.0" - 17.6")

Guaranteed Performance

Bar code	Standard Range
5.0 mil	65 mm - 129 mm (2.6" - 5.1")
7.5 mil	35 mm - 230 mm (1.4" - 9.1")
10.4 mil	20 mm - 350 mm (0.8" - 13.8")
13 mil	0 mm - 419 mm (0.0" - 16.5")


Note: Resolution at 4 mil (0.127mm)
Performance may be impacted by bar code quality and environmental conditions.

Standard Cable Pinouts

Note: The following pin assignments are not compatible with Honeywell legacy products. Use of a cable with improper pin assignments may lead to damage to the unit. Use of any cables not provided by the manufacturer may result in damage not covered by your warranty.


Keyboard Wedge

10 Pin RJ41 Modular Plug - connects to the scanner handle

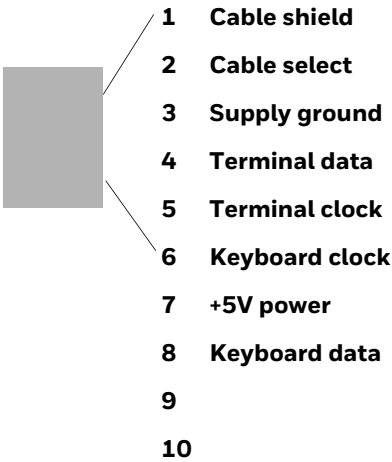

Serial Output


10 Pin RJ41 Modular Plug - connects to the scanner handle

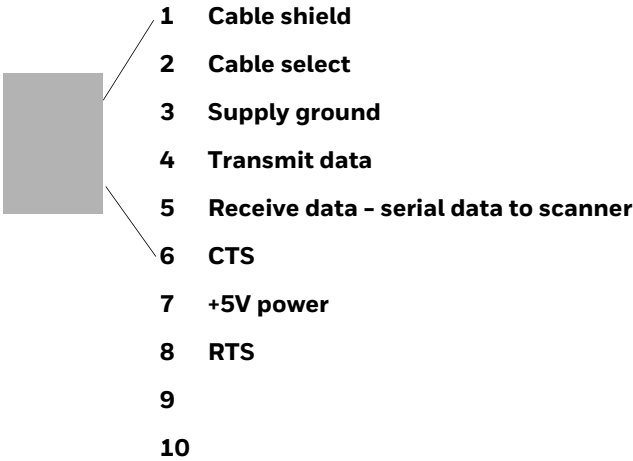

RS485 Output


10 Pin RJ41 Modular Plug - connects to the scanner handle

Note: RS485 signal conversion is performed in the cable.

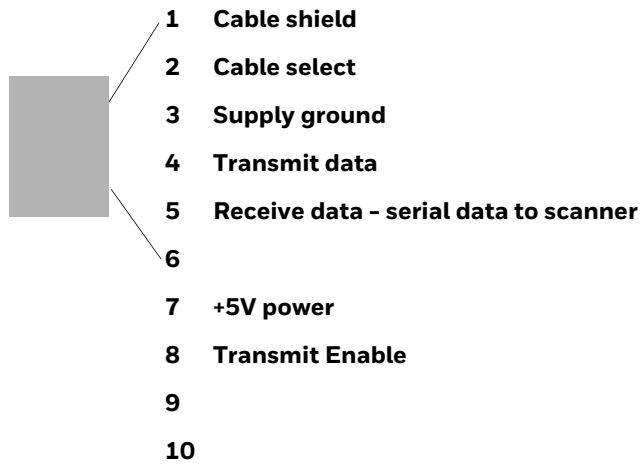


USB

10 Pin Modular Plug - connects to the scanner handle

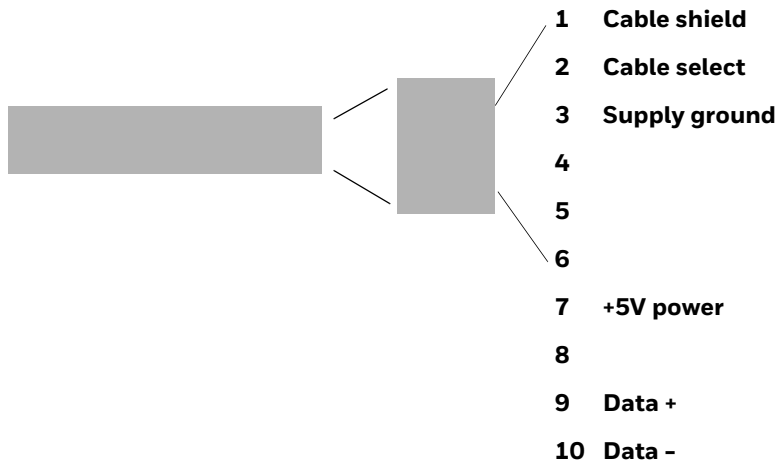

Required Safety Label Locations

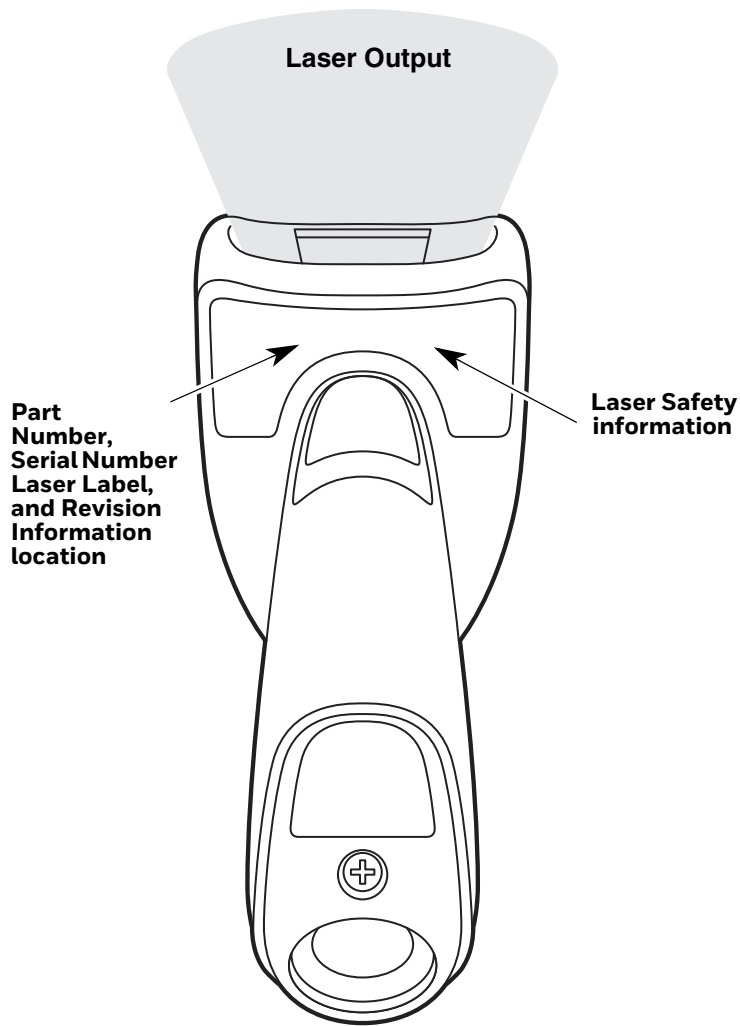

Laser Safety Statement



This device has been tested in accordance with and complies with IEC60825-1 Ed 2 and 21 CFR 1040.10 and 1040.11, except for deviations pursuant to Laser Notice No. 50, dated June 24, 2007.

LASER LIGHT, DO NOT STARE INTO BEAM, CLASS 2 LASER PRODUCT. 1 mW MAX OUTPUT: 645-660nm.

Scanner Laser Beam

Wavelength 645 - 660 nm

Divergence < 1.5 mrad. per IEC 60825-1 worst case

Max power output < 1mw

Embedded Laser

Wavelength 645 - 660 nm

Divergence < 1.5 mrad, per IEC 60825-1 worst case

Max power output < 10 mw



Caution: Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

MAINTENANCE AND TROUBLESHOOTING

Repairs

Repairs and/or upgrades are not to be performed on this product. These services are to be performed only by an authorized service center (see [Product Service and Repair](#) on page xiii).

Maintenance

Your device provides reliable and efficient operation with a minimum of care. Although specific maintenance is not required, the following periodic checks ensure dependable operation:

Clean the Device:

Reading performance may degrade if the scanner's window is not clean. If the window is visibly dirty, or if the scanner isn't operating well, clean the window with a soft cloth or lens tissue dampened with water (or a mild detergent- water solution). If a detergent solution is used, rinse with a clean lens tissue dampened with water only. The scanner's housing may also be cleaned the same way.



Caution: Do not submerge the scanner in water. The scanner's housing is not watertight. Do not use abrasive wipes or tissues on the scanner's window. Abrasive wipes may scratch the window. Never use solvents (e.g., acetone) on the housing or window. Solvents may damage the finish or the window.

Inspect Cords and Connectors

Inspect the interface cable and connector for wear or other signs of damage. A badly worn cable or damaged connector may interfere with scanner operation. Contact your distributor for information about cable replacement. Cable replacement instructions are on [page 186](#).

Replace Cables

The standard interface cable is attached to the scanner with an 10-pin modular connector. When properly seated, the connector is held in the scanner's handle by a flexible retention tab. The interface cable is designed to be field replaceable.

- Order replacement cables from Honeywell or from an authorized distributor.
- When ordering a replacement cable, specify the cable part number of the original interface cable.

Replace an Interface Cable

1. Turn off the power to the host system.
2. Disconnect the scanner's cable from the terminal or computer.
3. Locate the small hole on the underside of the scanner's handle. This is the cable release.
4. Straighten one end of a paper clip.
5. Insert the end of the paper clip into the small hole and press in. This depresses the retention tab, releasing the connector. Pull the connector out while maintaining pressure on the paper clip, then remove the paper clip.
6. Replace with the new cable.
Insert the connector into the opening and press firmly. The connector is keyed to go in only one way, and will click into place.



Troubleshoot a Voyager Scanner

The scanner automatically performs self-tests whenever you turn it on. If your scanner is not functioning properly, review the following Troubleshooting Guide to try to isolate the problem.

Is the power on? Is the laser aimer on?

If the laser aimer isn't illuminated, check that:

- The cable is connected properly.
- The host system power is on (if external power isn't used).
- The trigger works.

Is the scanner having trouble reading your symbols?

If the scanner isn't reading symbols well, check that the scanner window is clean and that the symbols:

- Aren't smeared, rough, scratched, or exhibiting voids.

- Aren't coated with frost or water droplets on the surface.
- Are enabled in the scanner or in the decoder to which the scanner connects.

Is the bar code displayed but not entered?

The bar code is displayed on the host device correctly, but you still have to press a key to enter it (the Enter/Return key or the Tab key, for example).

- You need to program a suffix. Programming a suffix enables the scanner to output the bar code data plus the key you need (such as "CR") to enter the data into your application. Refer to [Prefix/Suffix Overview](#) on page 61 for further information.

The scanner won't read your bar code at all.

1. Scan the sample bar codes in the back of this manual. If the scanner reads the sample bar codes, check that your bar code is readable.
Verify that your bar code symbology is enabled (see [Chapter 6](#)).
2. If the scanner still can't read the sample bar codes, scan [All Symbologies Off](#), page 88.

If you aren't sure what programming options have been set in the scanner, or if you want the factory default settings restored, refer to [Set Custom Defaults](#) on page 5.

REFERENCE CHARTS

Symbology Charts

Note: “m” represents the AIM modifier character. Refer to *International Technical Specification, Symbology Identifiers*, for AIM modifier character details.

Prefix/Suffix entries for specific symbologies override the universal (All Symbologies, 99) entry.

Refer to [Data Edit](#) beginning on page 61 and [Data Format](#) beginning on page 69 for information about using Code ID and AIM ID.

Linear Symbologies

Symbology	AIM		Honeywell	
	ID	Possible modifiers (m)	ID	Hex
All Symbologies				99
Codabar	JFm	0-1	a	61
Code 11	JH3		h	68
Code 128	JCm	0, 1, 2, 4	j	6A
Code 32 Pharmaceutical (PARAF)	JX0		<	3C
Code 39 (supports Full ASCII mode)	JAm	0, 1, 3, 4, 5, 7	b	62
TCIF Linked Code 39 (TLC39)	JL2		T	54
Code 93 and 93i	JGm	0-9, A-Z, a-m	i	69
EAN	JEm	0, 1, 3, 4	d	64
EAN-13 (including Bookland EAN)	JE0		d	64
EAN-13 with Add-On	JE3		d	64
EAN-13 with Extended Coupon Code	JE3		d	64
EAN-8	JE4		D	44

Symbology	AIM		Honeywell	
	ID	Possible modifiers (m)	ID	Hex
EAN-8 with Add-On	JE3		D	44
GS1				
GS1 DataBar	jem	0	y	79
GS1 DataBar Limited	jem		{	7B
GS1 DataBar Expanded	jem		}	7D
GS1-128	JC1		l	49
2 of 5				
China Post (Hong Kong 2 of 5)	JX0		Q	51
Interleaved 2 of 5	Jlm	0, 1, 3	e	65
Matrix 2 of 5	JX0		m	6D
NEC 2 of 5	JX0		Y	59
Straight 2 of 5 IATA	JRm	0, 1, 3	f	66
Straight 2 of 5 Industrial	JS0		f	66
MSI	JMm	0, 1	g	67
Telepen	JBm		t	74
UPC		0, 1, 2, 3, 8, 9, A, B, C		
UPC-A	JE0		c	63
UPC-A with Add-On	JE3		c	63
UPC-A with Extended Coupon Code	JE3		c	63
UPC-E	JE0		E	45
UPC-E with Add-On	JE3		E	45
UPC-E1	JX0		E	45

Add Honeywell Code ID				5C80
Add AIM Code ID				5C81
Add Backslash				5C5C
Batch mode quantity			5	35

2D Symbologies

Symbology	AIM		Honeywell	
	ID	Possible modifiers (m)	ID	Hex
All Symbologies				99
Aztec Code	jzm	0-9, A-C	z	7A

Symbology	AIM		Honeywell	
	ID	Possible modifiers (m)	ID	Hex
Chinese Sensible Code (Han Xin Code)	]X0		H	48
Codablock A	]06	0, 1, 4, 5, 6	V	56
Codablock F	]0m	0, 1, 4, 5, 6	q	71
Code 49	]Tm	0, 1, 2, 4	l	6C
Data Matrix	]dm	0-6	w	77
GS1	]em	0-3	y	79
GS1 Composite	]em	0-3	y	79
GS1 DataBar Omnidirectional	]em	0-3	y	79
MaxiCode	]Um	0-3	x	78
PDF417	]Lm	0-2	r	72
MicroPDF417	]Lm	0-5	R	52
QR Code	]Qm	0-6	s	73
Micro QR Code	]Qm		s	73

Postal Symbologies

Symbology	AIM		Honeywell	
	ID	Possible modifiers (m)	ID	Hex
All Symbologies				99
Australian Post	]X0		A	41
British Post	]X0		B	42
Canadian Post	]X0		C	43
China Post	]X0		Q	51
InfoMail	]X0		,	2c
Intelligent Mail Bar Code	]X0		M	4D
Japanese Post	]X0		J	4A
KIX (Netherlands) Post	]X0		K	4B
Korea Post	]X0		?	3F
Planet Code	]X0		L	4C
Postal-4i	]X0		N	4E
Postnet	]X0		P	50

ASCII Conversion Chart (Code Page 1252)

In keyboard applications, ASCII Control Characters can be represented in 3 different ways, as shown below. The CTRL+X function is OS and application dependent. The following table lists some commonly used Microsoft functionality. This table applies to U.S. style keyboards. Certain characters may differ depending on your Country Code/PC regional settings.

Non-printable ASCII control characters			Keyboard Control + ASCII (CTRL+X) Mode		
DEC	HEX	Char	Control + X Mode Off (KBDCAS0)	Windows Mode Control + X Mode On (KBDCAS2)	
				CTRL + X	CTRL + X function
0	00	NUL	Reserved	CTRL+ @	
1	01	SOH	NP Enter	CTRL+ A	Select all
2	02	STX	Caps Lock	CTRL+ B	Bold
3	03	ETX	ALT Make	CTRL+ C	Copy
4	04	EOT	ALT Break	CTRL+ D	Bookmark
5	05	ENQ	CTRL Make	CTRL+ E	Center
6	06	ACK	CTRL Break	CTRL+ F	Find
7	07	BEL	Enter / Ret	CTRL+ G	
8	08	BS	(Apple Make)	CTRL+ H	History
9	09	HT	Tab	CTRL+ I	Italic
10	0A	LF	(Apple Break)	CTRL+ J	Justify
11	0B	VT	Tab	CTRL+ K	hyperlink
12	0C	FF	Delete	CTRL+ L	list, left align
13	0D	CR	Enter / Ret	CTRL+ M	
14	0E	SO	Insert	CTRL+ N	New
15	0F	SI	ESC	CTRL+ O	Open
16	10	DLE	F11	CTRL+ P	Print
17	11	DC1	Home	CTRL+ Q	Quit
18	12	DC2	PrtScn	CTRL+ R	
19	13	DC3	Backspace	CTRL+ S	Save
20	14	DC4	Back Tab	CTRL+ T	
21	15	NAK	F12	CTRL+ U	
22	16	SYN	F1	CTRL+ V	Paste
23	17	ETB	F2	CTRL+ W	
24	18	CAN	F3	CTRL+ X	
25	19	EM	F4	CTRL+ Y	?
26	1A	SUB	F5	CTRL+ Z	?
27	1B	ESC	F6	CTRL+ [	?
28	1C	FS	F7	CTRL+ \	?
29	1D	GS	F8	CTRL+]	?
30	1E	RS	F9	CTRL+ ^	?
31	1F	US	F10	CTRL+ -	?
127	7F	␣	NP Enter		?

Lower ASCII Reference Table

Note: Windows Code page 1252 and lower ASCII use the same characters.

Printable Characters								
DEC	HEX	Character	DEC	HEX	Character	DEC	HEX	Character
32	20	<SPACE>	64	40	@	96	60	`
33	21	!	65	41	A	97	61	a
34	22	"	66	42	B	98	62	b
35	23	#	67	43	C	99	63	c
36	24	\$	68	44	D	100	64	d
37	25	%	69	45	E	101	65	e
38	26	&	70	46	F	102	66	f
39	27	'	71	47	G	103	67	g
40	28	(	72	48	H	104	68	h
41	29	)	73	49	I	105	69	i
42	2A	*	74	4A	J	106	6A	j
43	2B	+	75	4B	K	107	6B	k
44	2C	,	76	4C	L	108	6C	l
45	2D	-	77	4D	M	109	6D	m
46	2E	.	78	4E	N	110	6E	n
47	2F	/	79	4F	O	111	6F	o
48	30	0	80	50	P	112	70	p
49	31	1	81	51	Q	113	71	q
50	32	2	82	52	R	114	72	r
51	33	3	83	53	S	115	73	s
52	34	4	84	54	T	116	74	t
53	35	5	85	55	U	117	75	u
54	36	6	86	56	V	118	76	v
55	37	7	87	57	W	119	77	w
56	38	8	88	58	X	120	78	x
57	39	9	89	59	Y	121	79	y
58	3A	:	90	5A	Z	122	7A	z
59	3B	;	91	5B	[	123	7B	{
60	3C	<	92	5C	\	124	7C	
61	3D	=	93	5D	]	125	7D	}
62	3E	>	94	5E	^	126	7E	~
63	3F	?	95	5F	_	127	7F	△

Extended ASCII Characters					
DEC	HEX	CP 1252	ASCII	Alternate Extended	PS2 Scan Code
128	80	€	Ç	up arrow ↑	0x48
129	81		ü	down arrow ↓	0x50
130	82	,	é	right arrow →	0x4B
131	83	f	â	left arrow ←	0x4D
132	84	„	ä	Insert	0x52
133	85	...	à	Delete	0x53
134	86	†	å	Home	0x47
135	87	‡	ç	End	0x4F
136	88	^	ê	Page Up	0x49
137	89	‰	ë	Page Down	0x51
138	8A	Š	è	Right ALT	0x38
139	8B	‹	ï	Right CTRL	0x1D

Extended ASCII Characters (Continued)

DEC	HEX	CP 1252	ASCII	Alternate Extended	PS2 Scan Code
140	8C	Œ	î	Reserved	n/a
141	8D		ï	Reserved	n/a
142	8E	Ž	Ā	Numeric Keypad Enter	0x1C
143	8F		Ă	Numeric Keypad /	0x35
144	90		É	F1	0x3B
145	91	‘	æ	F2	0x3C
146	92	’	Æ	F3	0x3D
147	93	“	ô	F4	0x3E
148	94	”	ö	F5	0x3F
149	95	•	ò	F6	0x40
150	96	—	û	F7	0x41
151	97	—	ù	F8	0x42
152	98	~	ÿ	F9	0x43
153	99	™	Ö	F10	0x44
154	9A	š	Ü	F11	0x57
155	9B	›	ç	F12	0x58
156	9C	œ	£	Numeric Keypad +	0x4E
157	9D		¥	Numeric Keypad -	0x4A
158	9E	ž	ƒ	Numeric Keypad *	0x37
159	9F	ÿ	f	Caps Lock	0x3A
160	A0		á	Num Lock	0x45
161	A1	ı	í	Left Alt	0x38
162	A2	ç	ó	Left Ctrl	0x1D
163	A3	£	ú	Left Shift	0x2A
164	A4	¤	ñ	Right Shift	0x36
165	A5	¥	Ñ	Print Screen	n/a
166	A6	ı	ª	Tab	0x0F
167	A7	§	º	Shift Tab	0x8F
168	A8	”	¿	Enter	0x1C
169	A9	©	ƒ	Esc	0x01
170	AA	ª	¬	Alt Make	0x36
171	AB	«	½	Alt Break	0xB6
172	AC	¬	¼	Control Make	0x1D
173	AD		ı	Control Break	0x9D
174	AE	®	«	Alt Sequence with 1 Character	0x36
175	AF	—	»	Ctrl Sequence with 1 Character	0x1D
176	B0	º	░		
177	B1	±	▒		
178	B2	²	▓		
179	B3	³	␣		
180	B4	´	␣		
181	B5	µ	␣		
182	B6	¶	␣		
183	B7	·	␣		
184	B8	¸	␣		
185	B9	¹	␣		
186	BA	º	␣		
187	BB	»	␣		
188	BC	¼	␣		
189	BD	½	␣		
190	BE	¾	␣		
191	BF	¿	␣		
192	C0	À	␣		
193	C1	Á	␣		

Extended ASCII Characters (Continued)					
DEC	HEX	CP 1252	ASCII	Alternate Extended	PS2 Scan Code
194	C2	Â	Ƨ		
195	C3	Ã	Ƨ		
196	C4	Ä	—		
197	C5	Å	í		
198	C6	Æ	Ƨ		
199	C7	Ç	Ƨ		
200	C8	È	Ƨ		
201	C9	É	Ƨ		
202	CA	Ê	Ƨ		
203	CB	Ë	Ƨ		
204	CC	Ì	Ƨ		
205	CD	Í	=		
206	CE	Î	Ƨ		
207	CF	Ï	Ƨ		
208	D0	Ð	Ƨ		
209	D1	Ñ	Ƨ		
210	D2	Ò	Ƨ		
211	D3	Ó	Ƨ		
212	D4	Ô	Ƨ		
213	D5	Õ	Ƨ		
214	D6	Ö	Ƨ		
215	D7	×	Ƨ		
216	D8	Ø	Ƨ		
217	D9	Ù	Ƨ		
218	DA	Ú	Ƨ		
219	DB	Û	■		
220	DC	Ü	■		
221	DD	Ý	■		
222	DE	Þ	■		
223	DF	ß	■		
224	E0	à	α		
225	E1	á	ß		
226	E2	â	Ƨ		
227	E3	ã	π		
228	E4	ä	Σ		
229	E5	å	σ		
230	E6	æ	μ		
231	E7	ç	τ		
232	E8	è	Φ		
233	E9	é	Θ		
234	EA	ê	Ω		
235	EB	ë	δ		
236	EC	ì	∞		
237	ED	í	φ		
238	EE	î	ε		
239	EF	ï	∩		
240	F0	ð	≡		
241	F1	ñ	±		
242	F2	ò	≥		
243	F3	ó	≤		
244	F4	ô	∫		
245	F5	õ	∫		
246	F6	ö	÷		
247	F7	÷	≈		

Extended ASCII Characters (Continued)					
DEC	HEX	CP 1252	ASCII	Alternate Extended	PS2 Scan Code
248	F8	ø	°		
249	F9	ù	·		
250	FA	ú	·		
251	FB	û	√		
252	FC	ü	ñ		
253	FD	ý	²		
254	FE	þ	■		
255	FF	ÿ			

ISO 2022/ISO 646 Character Replacements

Code pages define the mapping of character codes to characters. If the data received does not display with the proper characters, it may be because the bar code being scanned was created using a code page that is different from the one the host program is expecting. If this is the case, select the code page with which the bar codes were created. The data characters should then appear properly.

Code Page Selection Method/ Country	Standard	Keyboard Country	Honeywell Code Page Option
United States (standard ASCII)	ISO/IEC 646-IRV	n/a	1
Automatic National Character Replacement	ISO/IEC 2022	n/a	2 (default)
Binary Code page	n/a	n/a	3
Default “Automatic National Character replacement” will select the below Honeywell Code Page options for Code128, Code 39 and Code 93.			
United States	ISO/IEC 646-06	0	1
Canada	ISO /IEC 646-121	54	95
Canada	ISO /IEC 646-122	18	96
Japan	ISO/IEC 646-14	28	98
China	ISO/IEC 646-57	92	99
Great Britain (UK)	ISO /IEC 646-04	7	87
France	ISO /IEC 646-69	3	83
Germany	ISO/IEC646-21	4	84
Switzerland	ISO /IEC 646-CH	6	86
Sweden / Finland (extended Annex C)	ISO/IEC 646-11	2	82
Ireland	ISO /IEC 646-207	73	97
Denmark	ISO/IEC 646-08	8	88
Norway	ISO/IEC 646-60	9	94
Italy	ISO/IEC 646-15	5	85
Portugal	ISO/IEC 646-16	13	92

Code Page Selection Method/ Country	Standard	Keyboard Country	Honeywell Code Page Option
Spain	ISO/IEC 646-17	10	90
Spain	ISO/IEC 646-85	51	91

Dec			35	36	64	91	92	93	94	96	123	124	125	126
Hex			23	24	40	5B	5C	5D	5E	60	7B	7C	7D	7E
US	0	1	#	\$	@	[	\	]	^	`	{		}	~
CA	54	95	#	\$	à	â	ç	ê	î	ô	é	ù	è	û
CA	18	96	#	\$	à	â	ç	ê	É	ô	é	ù	è	û
JP	28	98	#	\$	@	[	¥	]	^	`	{		}	-
CN	92	99	#	¥	@	[	\	]	^	`	{		}	-
GB	7	87	£	\$	@	[	\	]	^	`	{		}	~
FR	3	83	£	\$	à	°	ç	§	^	μ	é	ù	è	¨
DE	4	84	#	\$	§	Ä	Ö	Ü	^	`	ä	ö	ü	ß
CH	6	86	ù	\$	à	é	ç	ê	î	ô	ä	ö	ü	û
SE/FI	2	82	#	¤	É	Ä	Ö	Å	Ü	é	ä	ö	å	ü
DK	8	88	#	\$	@	Æ	Ø	Å	^	`	æ	ø	å	~
NO	9	94	#	\$	@	Æ	Ø	Å	^	`	æ	ø	å	-
IE	73	97	£	\$	Ó	É	Í	Ú	Á	ó	é	í	ú	á
IT	5	85	£	\$	§	°	ç	é	^	ù	à	ò	è	ì
PT	13	92	#	\$	§	Ã	Ç	Õ	^	`	ã	ç	õ	°
ES	10	90	#	\$	§	í	Ñ	¿	^	`	°	ñ	ç	~
ES	51	91	#	\$	·	í	Ñ	Ç	¿	`	´	ñ	ç	¨
COUNTRY	Country Keyboard	Honeywell CodePage	ISO / IEC 646 National Character Replacements											

Keyboard Key References

6E	70	71	72	73	74	75	76	77	78	79	7A	7B	7C	7D	7E						
01	02	03	04	05	06	07	08	09	0A	0B	0C	0D	0F	4B	50	55	5A	5F	64	69	
10	11	12	13	14	15	16	17	18	19	1A	1B	1C	1D	4C	51	56	5B	60	65	6A	
1E	1F	20	21	22	23	24	25	26	27	28	29	2B					5C	61	66		
2C	2E	2F	30	31	32	33	34	35	36	37	39			53			5D	62	67	6C	
3A	3B	3C	3D					3E					3F	38	40	4F	54	59	63	68	


104 Key U.S. Style Keyboard

6E	70	71	72	73	74	75	76	77	78	79	7A	7B	7C	7D	7E					
01	02	03	04	05	06	07	08	09	0A	0B	0C	0D	0F	4B	50	55	5A	5F	64	69
10	11	12	13	14	15	16	17	18	19	1A	1B	1C	2B	4C	51	56	5B	60	65	6A
1E	1F	20	21	22	23	24	25	26	27	28	29	2A					5C	61	66	
2C	2D	2E	2F	30	31	32	33	34	35	36	37	39		53			5D	62	67	6C
3A	3B	3C	3D					3E		3F	38	40	4F	54	59		63	68		

105 Key European Style Keyboard

Sample Symbols

UPC-A



0 123456 7890

Interleaved 2 of 5



01234567890

EAN-13




9 780330 290951

Code 128




Code 128

Code 39



BC321

Codabar




A13579B

Code 93



123456-9\$

Straight 2 of 5 Industrial



123456

Matrix 2 of 5



6543210

GS1 DataBar



(01)00123456789012

Programming Chart



K0K
0



K2K
2



K4K
4



K6K
6



K8K
8



K1K
1



K3K
3



K5K
5



K7K
7



K9K
9

Programming Chart (Continued)



KAK
A



KBK
B



KCK
C



KDK
D



KEK
E



KFK
F



MNUSAV.
Save



MNUABT.
Discard



RESET_
Reset

Note: If you make an error while scanning the letters or digits (before scanning **Save**), scan **Discard**, scan the correct letters or digits, and **Save** again.

Honeywell
9680 Old Bailes Road
Fort Mill, SC 29707

www.honeywellaidc.com